




eran group.

THE TRUE FACE OF LIGHTING

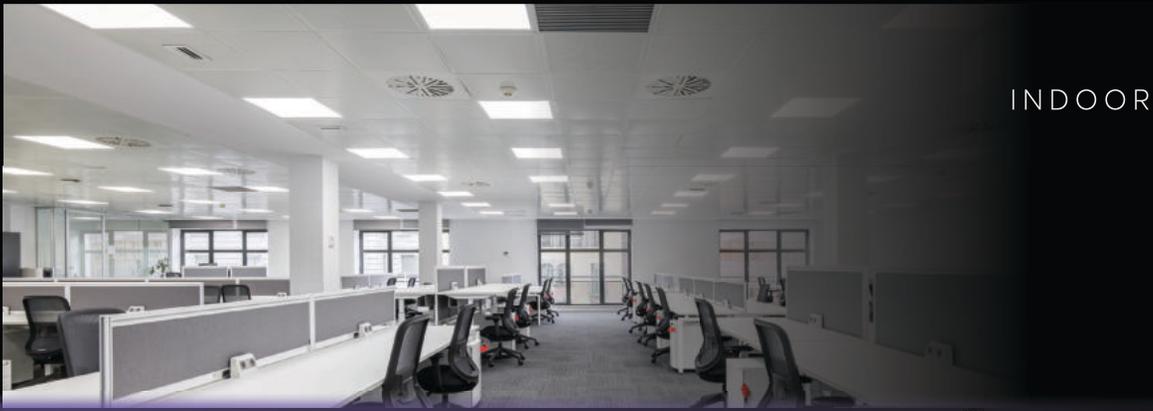

INDOOR & OUTDOOR LIGHTING |



LANDSCAPE LIGHTING |



CEILING FANS |

ALTITUDE

About Eran Group



From Humble Beginnings to a True Global Operations network

Welcome to Eran Group, where we are dedicated to revolutionizing the world of lights, fans, and electrical goods. With a fresh perspective and innovative strategies, we are here to make these essential products so much better. Get ready to experience a new era of lighting solutions.

We believe that innovation is the key to progress. Our team of experts is constantly pushing the boundaries of lighting technology to bring you products that are not only energy-efficient but also aesthetically pleasing. With our commitment to quality and design, we are redefining lighting standards and creating products that enhance your spaces like never before.

Eran Group and its own specialized developed brands offer a wide range of products and services to meet our customers needs in a variety of industries.

For more than three decades, Eran has grown from a component manufacturer specializing in lenses, refractors, and globes for the lighting industry to a global operations network tailoring products, engineering, design and logistics solutions to the needs of original equipment manufacturer customers around the world.

Today, our extraordinary innovation, design and manufacturing capabilities makes us the preferred partner for our customers.



Our Story



1988

Our roots date back to 1988. Eran Plastics out of Newburgh, New York, specializing in injection molded plastic components and globes, focused on serving USA and Canadian lighting OEMs.

2000

Eran Industrial expanded its operations into Asia, serving 4 out of the 5 largest lighting OEMs and the majority of lighting manufacturers and top brands in North America.

2023

Fast forward to today, Eran Industrial is based out of Boca Raton, FL with a full in-house product design & engineering team and a 760,000 square foot facility right outside Mobile, Alabama which serves as Eran's main manufacturing & distribution facility.

Eran is building in America!



Eran acquired a 760,000 square foot industrial facility outside of Mobile, Alabama in June 2022, that has been revolutionizing the way we deliver value and cater to our customers' needs. Situated just 26 miles from Mobile's port, our facility enjoys prime positioning for efficient logistics and seamless transportation.


Made in America: At Eran, we take immense pride in being able to offer Made in America products. With our new facility, we can further enhance our products and diversify our SKU range, all while utilizing the same work-in-progress inventory. This achievement is a resounding victory for our valued customer base, who appreciate the quality and reliability that comes with American manufacturing.

Expansion and Adaptability: The scale of our facility opens up new horizons for Eran. With ample space and resources, we are poised to expand into various manufacturing disciplines based on the evolving needs of our customers. By prioritizing their requirements, we can stay ahead of the curve and deliver innovative solutions that drive success for both Eran and our valued partners.

SWEET HOME




Alabama

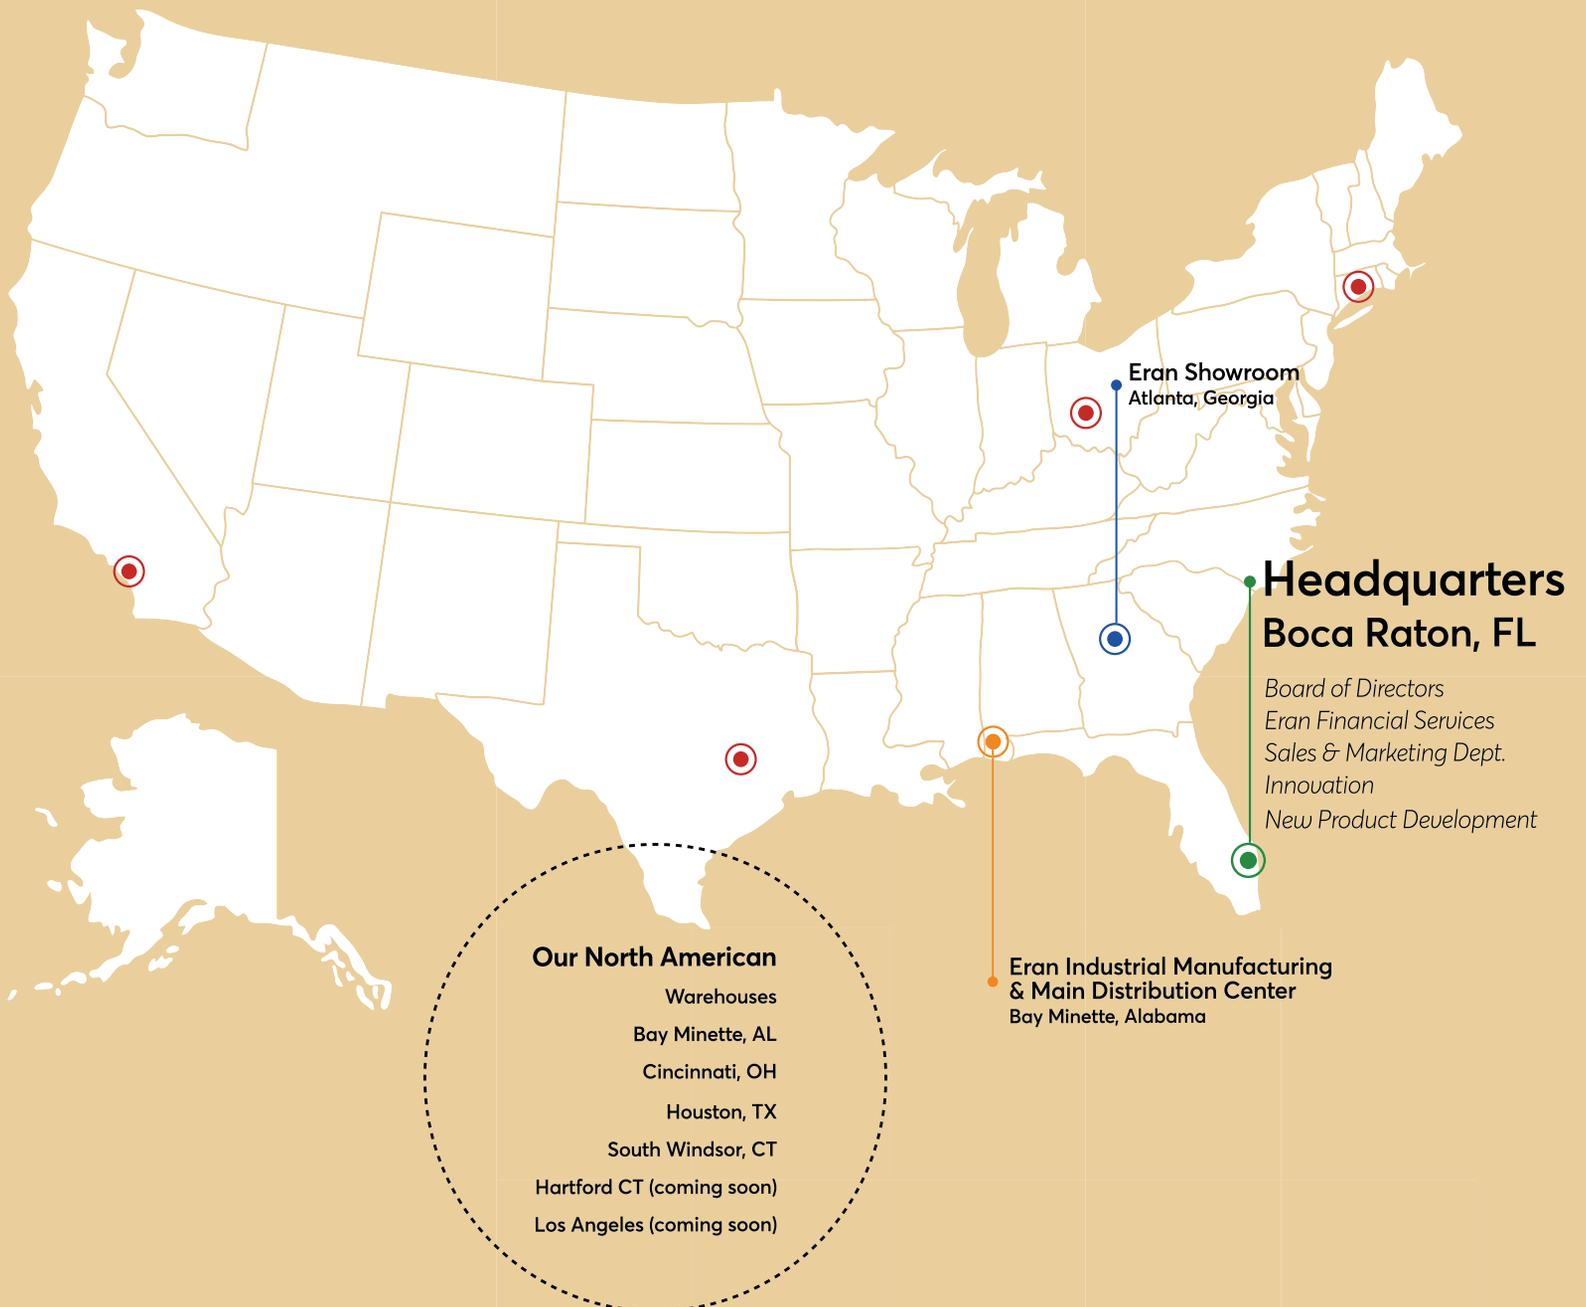



The True Face of Lighting

Step into a new era of dependability with Medinah Power, where we redefine the industry standards and empower distributors across the USA. Say goodbye to the industry's exorbitant markups and embrace a new wave of affordability and excellence. At Medinah Power, we are driven by a mission to ignite the electrical distributor through remarkable lighting solutions. Our products are crafted with a perfect blend of inspired design, cutting-edge technology, and the unmatched power of American ingenuity.

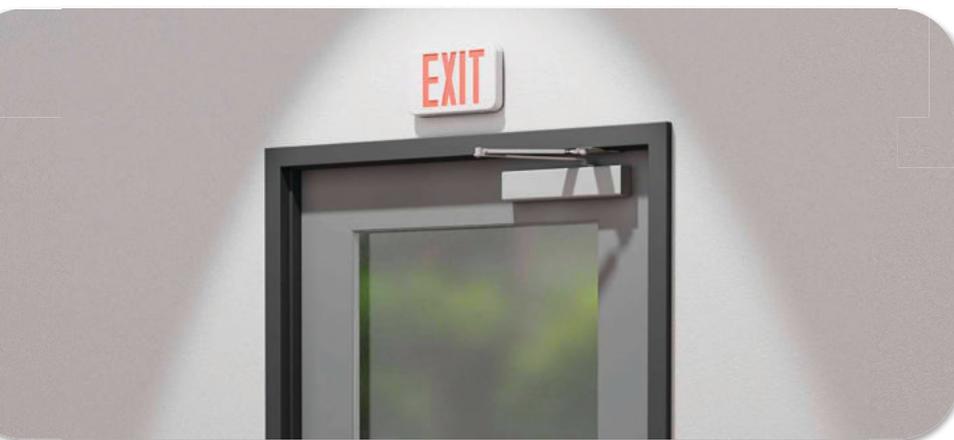

Why Medinah Power

We are here to make your experience absolutely hassle free



No nonsense Pricing

The easiest way to purchase, You pay what you see.



Easy Stocking Programs

Triple P brings you a ZERO risk player - always wins stocking program.



Hassle-Free Returns

Ship it back and we take it! That easy! Hassle free returns.



On-Demand Customer Service

Full-service team ready to help with strong support!

Preferred Partner Program (PPP)

Our Preferred Partners who stock three or more product families will get access to Medinah's lowest pricing tier for any order size.



Always in stock commitment.



Incredible extended payment terms.




Free custom showroom display.



Buy only what you need, No overstock!



\$1,000 pre-paid freight vs our standard \$2,500.

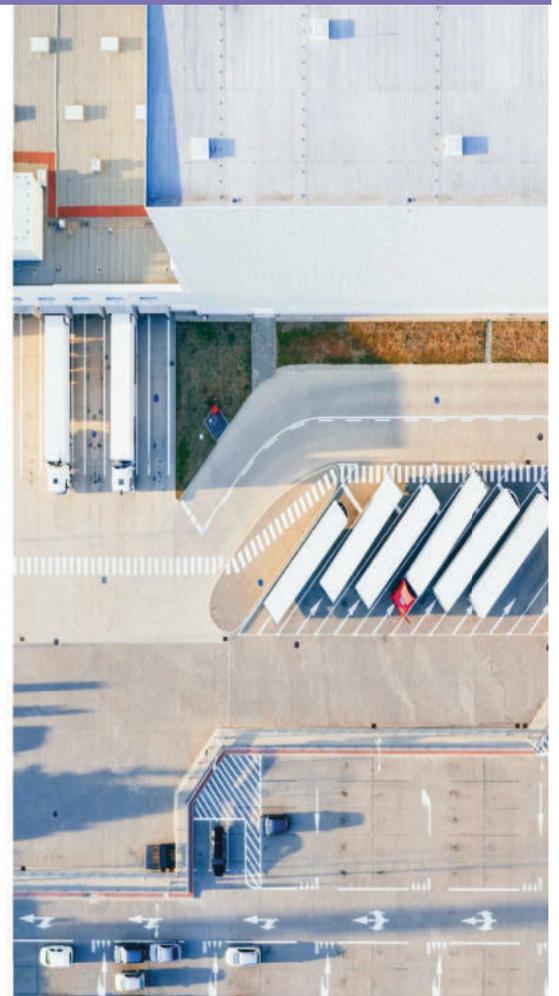

Medinah Store Displays

Free for Medinah PPP Members



Meet MEDINAH PAYS




The best distributor cash rewards program in the market.



Inquire today for all the exciting details about our Medinah Pays rewards program.



INDOOR LIGHTING

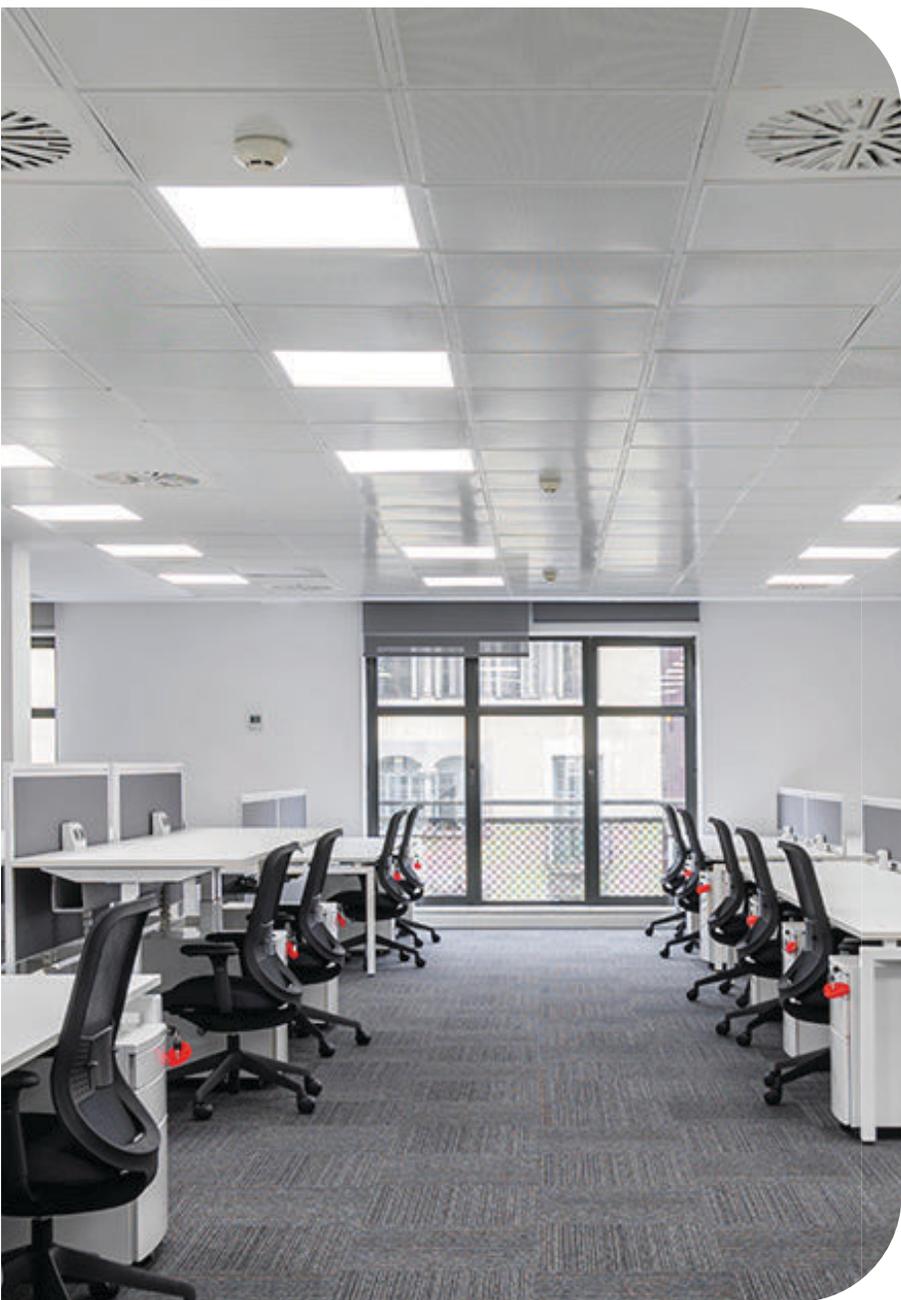

LED STRIP LIGHT

STR Series

Versatile lighting made easy



- Easy Install
- 0-10V Dimming
- 120-277V
- Lumen & Watt Selectable
- White Color CCT Selectable



Product Features

Light Output: 1950– 5200 Lumens

Wattage: 15-40 Watts

Replaces: Up to 175W Fluorescent

Efficacy: Up to 130 LPW

CCT Selectable: 3500K, 4000K, 5000K

CRI Options: 80 CRI

Finish Color: White

Mounting: Surface Mount, Suspension Mount



Performance Specification

Catalog Number	Size	Wattage	CCT	Lumens	Efficacy (LPW)	CRI	Input Voltage
STR2-25W-CCT-DV2-NA-F-WHSM	2 Ft	15/20/25	3500/4000/5000K	1950 / 2600 / 3250	130	>80	120-277V
STR4-40W-CCT-DV2-NA-F-WHSM	4 Ft	25/30/40	3500/4000/5000K	3250 / 3900 / 5200	130	>80	120-277V

Product Dimensions




STR2-25W-CCT-DV2-NA-F-WHSM	
A	22.2 in
B	2.8 in
C	2.5 in

STR4-40W-CCT-DV2-NA-F-WHSM	
A	47.3 in
B	2.8 in
C	2.5 in

Packaging Dimensions

Catalog Number	Master Pack Quantity	Dimensions
STR2-25W-CCT-DV2-NA-F-WHSM	6	23.2 in x 5.9in x 4.8in/17.2 lb
STR4-40W-CCT-DV2-NA-F-WHSM	6	48.3in x 5.9in x 4.8in/29.5 lb

Photometric Specification

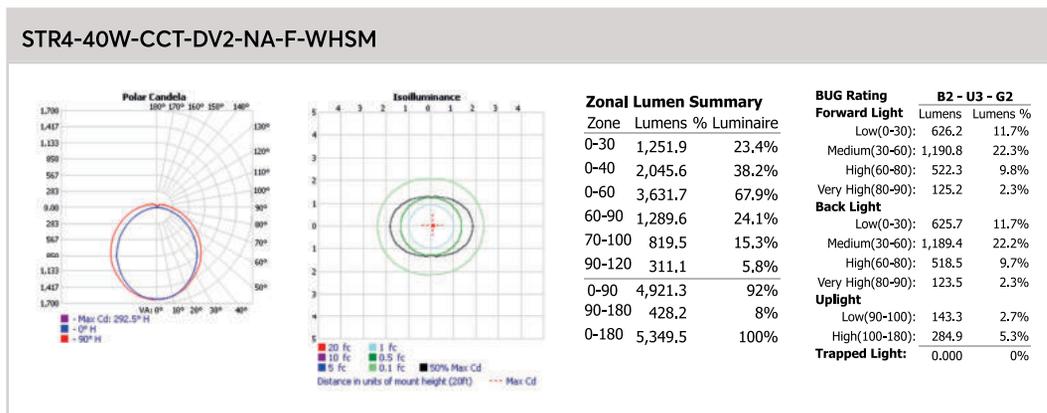

Accessories




V-Hook
Mounting Kit



Surface
Mounting Kit
STR-SMK



Row
connector
STR-ROW



Strip Wire
Guards
STR2-WG
STR4-WG



6' Whip




RETROFIT LED STRIP LIGHT

RSTR Series

Versatile lighting made easy



- Easy Install
- 0-10V Dimming
- 120-277V
- Lumen & Watt Selectable
- White Color CCT Selectable

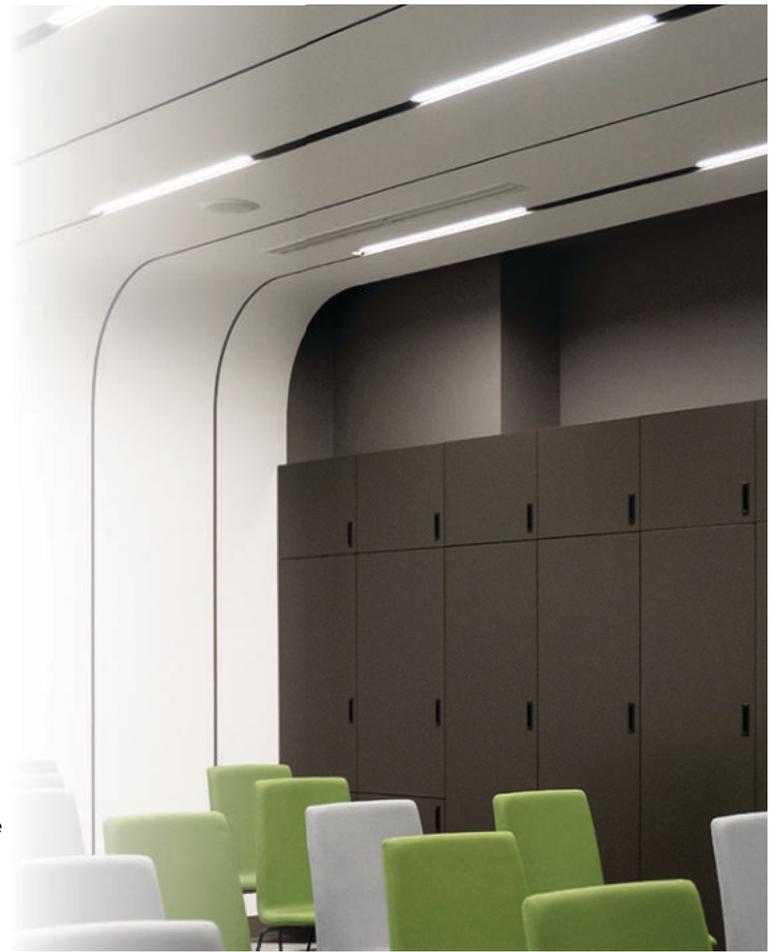

Product Features

Light Output: 2860– 5200 Lumens
Wattage: 22– 40 Watts
Replaces: Up to 175W Fluorescent
Efficacy: Up to 130LPW


CCT Selectable: 3500K, 4000K, 5000K
CRI Options: 80 CRI
Finish Color: White
Mounting: Surface Mount, Retrofit Mount, Suspension Mount



Performance Specification

Catalog Number	Size	Wattage	CCT	Lumens	Efficacy (LPW)	CRI	Input Voltage
RSTR4-40W-CCT-DV2-NA-F-WHSM-2	4 Ft	22/30/40	3500/4000/5000K	2860/ 3900/ 5200	130	>80	120-277V

Product Dimensions

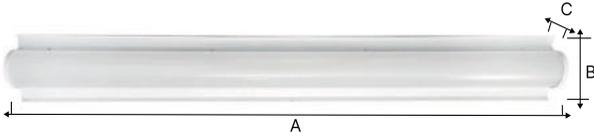


RSTR4-40W-CCT-DV2-NA-F-WHSM	
A	48.0 in
B	5.8 in
C	2.4 in

Packaging Dimensions

Catalog Number	Master Pack Quantity	Dimensions
RSTR4-40W-CCT-DV2-NA-F-WHSM-2	2	49.8 in x 7.4 in x 6.2in/13.2 lb

Photometric Specification

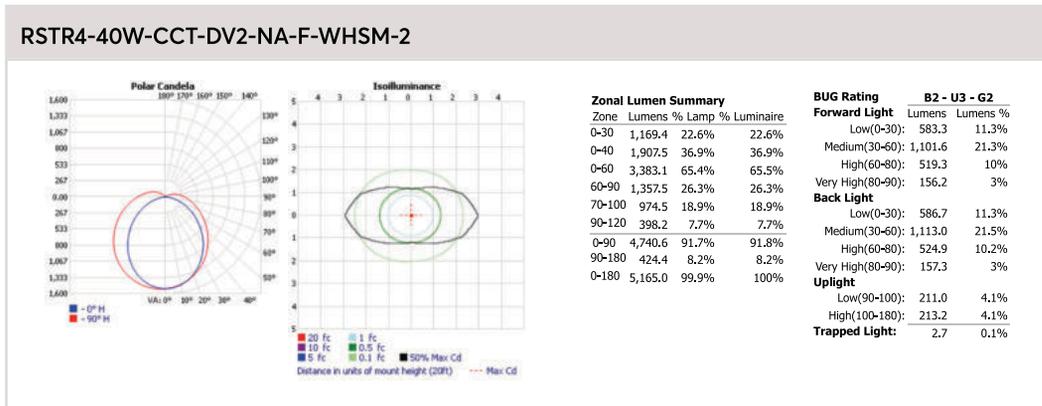


BACKLIT LED FLAT PANELS

DPS Series

A perfect blend of efficiency & value



-  Easy Install
-  0-10V Dimming
-  120-277V
-  Lumen & Watt Selectable
-  White Color CCT Selectable
-  Field Maintainable

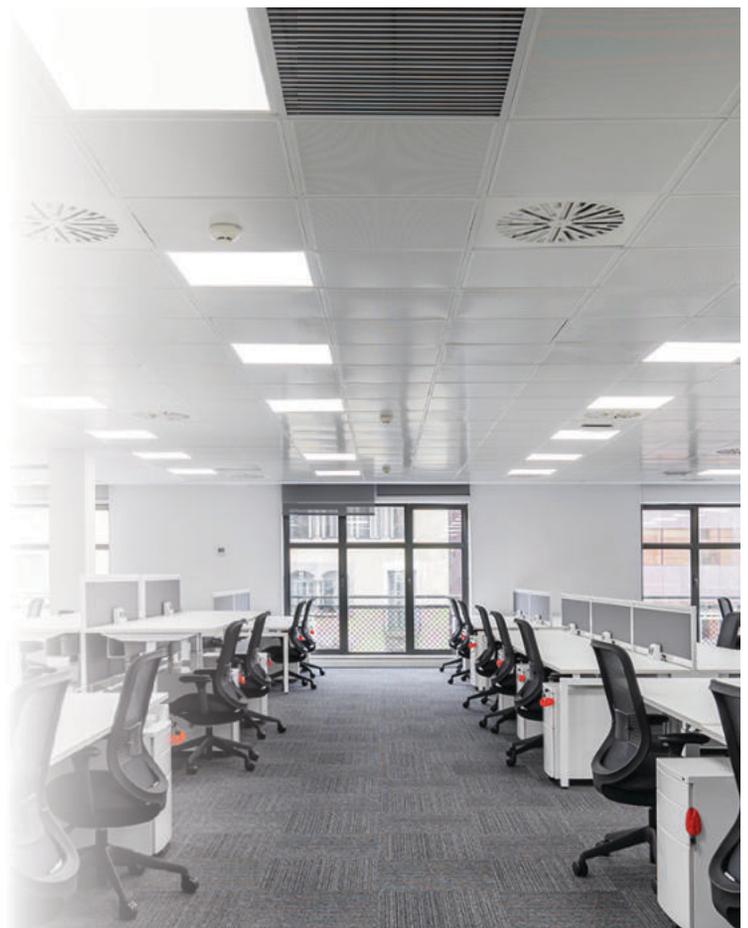

Product Features

Light Output: 2500- 5000 Lumens

Wattage: 20- 40 Watts

Replaces: Up to 175W Fluorescent

Efficacy: Up to 125LPW

CCT Selectable: 3500K, 4000K, 5000K

CRI Options: 80 CRI

Finish Color: White

Mounting: Recessed, Surface Mount,
Suspension Mount



Performance Specification

Catalog Number	Size	Wattage	CCT	Lumens	Efficacy (LPW)	CRI	Input Voltage
DPS-14-U-P-ET-4 / DPS-14-U-P-S-ET-4*	1X4 Ft	20/25/30	3500/4000/5000K	2500/3125/3750	125	>80	120-277V
DPS-22-U-P-ET-4 / DPS-22-U-P-S-ET-4*	2X2 Ft	20/25/30	3500/4000/5000K	2500/3125/3750	125	>80	120-277V
DPS-24-U-P / DPS-24-U-P-S-ET-4*	2X4 Ft	30/35/40	3500/4000/5000K	3750/4375/5000	125	>80	120-277V

*: 12V Aux Driver and snap in ready frame for smart and motion sensor.

Product Dimensions



DPS-14-U-P-ET-4 / DPS-14-U-P-S-ET-4*	
A	47.8 in
B	11.9 in
C	1.5 in


DPS-22-U-P-ET-4 / DPS-22-U-P-S-ET-4*	
A	23.7 in
B	23.7 in
C	1.5 in

DPS-24-U-P / DPS-24-U-P-S-ET-4*	
A	47.3 in
B	23.7 in
C	1.5 in

Packaging Dimensions

Catalog Number	Master Pack Quantity	Dimensions
DPS-14-U-P-ET-4 / DPS-14-U-P-S-ET-4*	4	49.3 in x 13.8 in x 6.2 in/22.5 lb
DPS-22-U-P-ET-4 / DPS-22-U-P-S-ET-4*	4	25.6 in x 25.6 in x 6.2 in/19.0 lb
DPS-24-U-P / DPS-24-U-P-S-ET-4*	4	49.3 in x 25.6 in x 6.2 in/37.7 lb

Photometric Specification

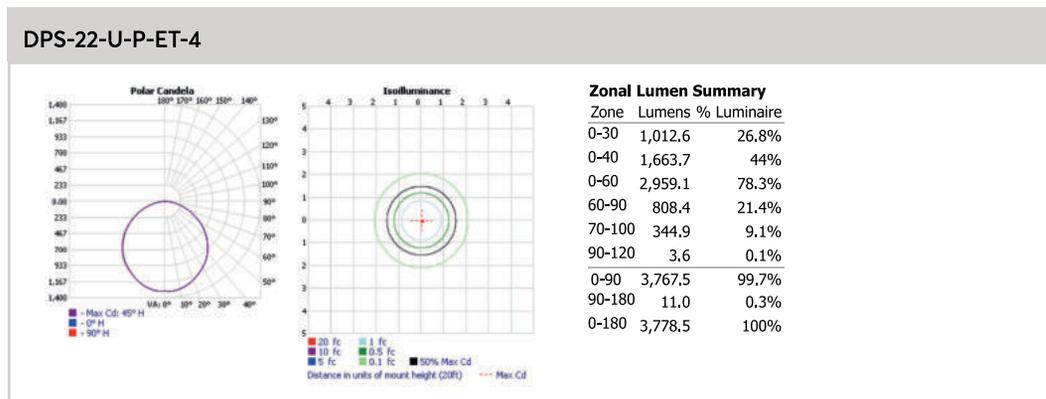

Accessories



Surface Mount Kit
DP-SMF-24-W
DP-SMF-22-W
DP-SMF-14-W



Cable Kit
DP-SMK-12-S
DP-SMK-14-S



PIR Motion Sensor
DP-MS


LED TROFFERS

TRO Series

Light Up Your Environment: Modern Volumetric Troffer Solutions.



-  Easy Install
-  0-10V Dimming
-  120-277V
-  Lumen & Watt Selectable
-  White Color CCT Selectable

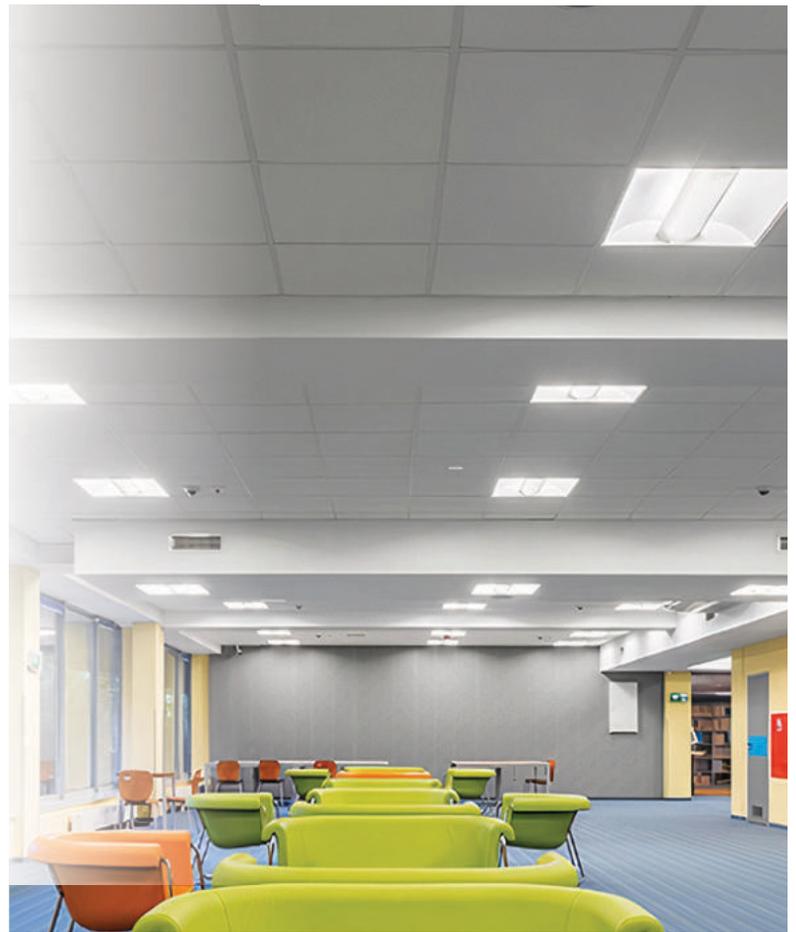

Product Features

Light Output: 3125– 5625 Lumens

Wattage: 25– 45 Watts

Replaces: Up to 175W Fluorescent

Efficacy: Up to 125LPW

CCT Selectable: 3500K, 4000K, 5000K

CRI Options: 80 CRI

Finish Color: White

Mounting: Recessed, Suspension Mount



Performance Specification

Catalog Number	Size	Wattage	CCT	Lumens	Efficacy (LPW)	CRI	Input Voltage
TRO2-35W-CCT-DV2-NA-F-WHSM-2	2x2 Ft	25/30/35	3500/ 4000/ 5000K	3125/3750/4375	125	>80	120-277V
TRO4-45W-CCT-DV2-F-WHSM-2	2x4 Ft	34/38/45	3500/ 4000/ 5000K	4250/4750/5625	125	>80	120-277V

Product Dimensions




TRO2-35W-CCT-DV2-NA-F-WHSM-2	
A	23.7 in
B	23.7 in
C	2.1 in

TRO4-45W-CCT-DV2-NA-F-WHSM-2	
A	47.8 in
B	23.7 in
C	2.1 in

Packaging Dimensions

Catalog Number	Master Pack Quantity	Dimensions
TRO2-35W-CCT-DV2-NA-F-WHSM-2	2	22.7 in x 22.7in x 10.1in/15.4lb
TRO4-45W-CCT-DV2-NA-F-WHSM-2	2	49.7 in x 24.7in x 10.3in/25.6lb

Photometric Specification

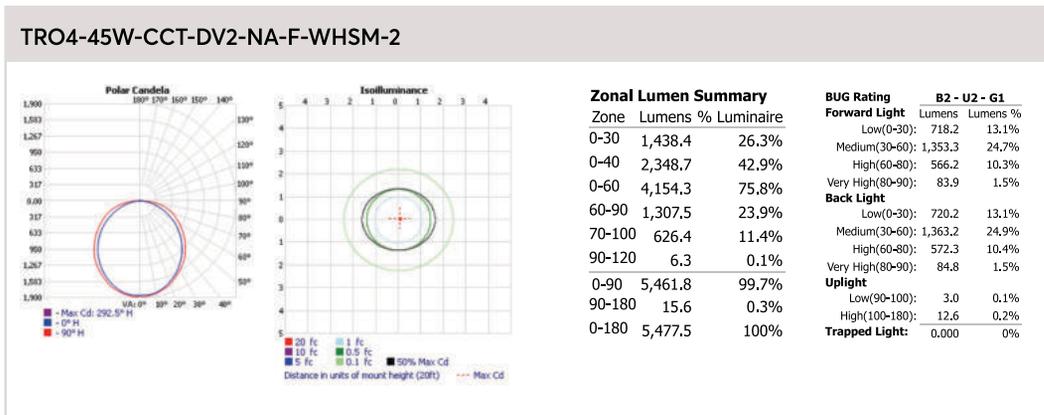

RETROFIT LED TROFFER

RTRO Series

Light Up Your Environment: Modern Volumetric Troffer Solutions.



-  Easy Install
-  0-10V Dimming
-  120-277V
-  Lumen & Watt Selectable
-  White Color CCT Selectable



Product Features

Light Output: 3750– 5625 Lumens

Wattage: 30– 45 Watts

Replaces: Up to 175W Fluorescent

Efficacy: Up to 125LPW

CCT Selectable: 3500K, 4000K, 5000K

CRI Options: 80 CRI

Finish Color: White

Mounting: Recessed, Suspension Mount



Performance Specification

Catalog Number	Size	Wattage	CCT	Lumens	Efficacy (LPW)	CRI	Input Voltage
RTRO2-40W-CCT-DV2-NA-F-WHSM	2x2 Ft	30/35/40	3500/ 4000/ 5000K	3750/4375/5000	125	>80	120-277V
RTRO4-45W-CCT-DV2-NA-F-WHSM	2x4 Ft	34/28/45	3500/ 4000/ 5000K	4250/4750/5625	125	>80	120-277V

Product Dimensions




RTRO2-40W-CCT-DV2-NA-F-WHSM	
A	23.8 in
B	23.8 in
C	3.1 in

RTRO4-45W-CCT-DV2-NA-F-WHSM	
A	47.8 in
B	23.8 in
C	3.1 in

Packaging Dimensions

Catalog Number	Master Pack Quantity	Dimensions
RTRO2-40W-CCT-DV2-NA-F-WHSM	2	22.7 in x 22.7in x 10.1in/17.0lb
RTRO4-45W-CCT-DV2-NA-F-WHSM	2	49.7 in x 24.7in x 10.3in/28.0lb

Photometric Specification

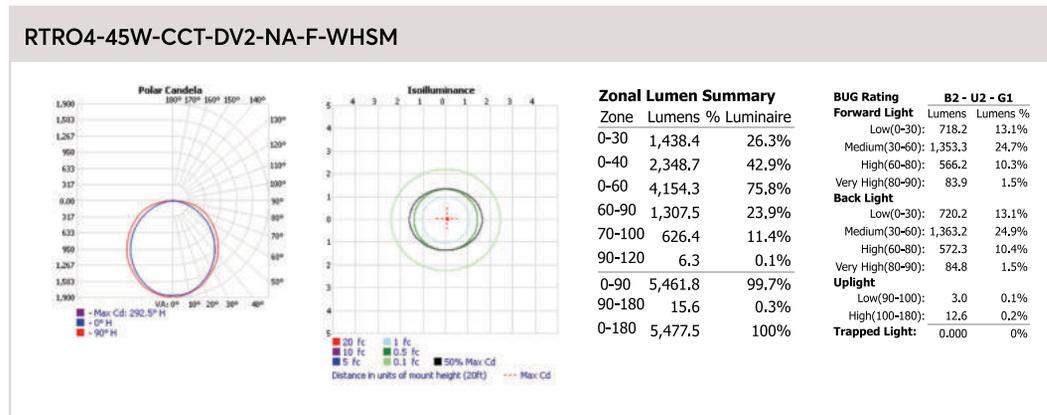


LINEAR HIGHBAYS

LHB Series

Light Up High Spaces



-  Easy Install
-  0-10V Dimming
-  120-277V
-  Wide Angle Optics
-  Versatile Mounting
-  Field Maintainable

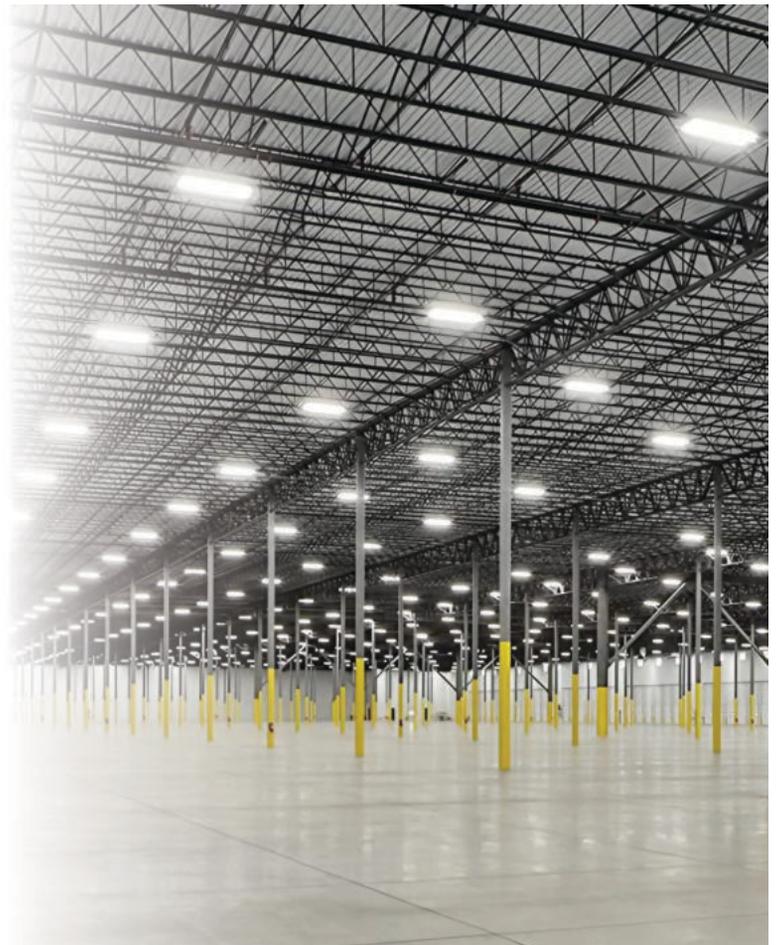

Product Features

Light Output: 21,000– 41,000 Lumens

Wattage: 135– 270 Watts

Replaces: Up to 1000W MH

Efficacy: Up to 150LPW

CCT Options: 4000K

CRI Options: 80 CRI

Finish Color: White


Mounting: Pendant mount, Suspension mount



Performance Specification

Catalog Number	Size	Wattage	CCT	Lumens	Efficacy (LPW)	CRI	Input Voltage
LHBS-135W-40K-DV2-NA-F-WHHM-4	1.4ft	135	4000K	21,000	156	>80	120-277V
LHBM-200W-40K-DV2-NA-F-WHHM-4	1.9ft	200	4000K	30,000	150	>80	120-277V
LHBL-270W-40K-DV2-NA-F-WHHM-4	2.6ft	270	4000K	41,000	152	>80	120-277V

Product Dimensions

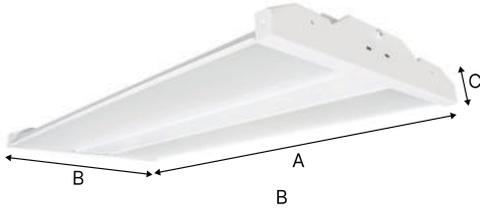


	LHBS-135W	LHBM-200W	LHBL-270W
A	16.5 in	22.8 in	31.1 in
B	10.2 in	10.2 in	10.2 in
C	1.8 in	1.8 in	1.8 in

Packaging Dimensions

Catalog Number	Master Pack Quantity	Dimensions
LHBS-135W-40K-DV2-NA-F-WHHM-4	4	17.7in x 11.1in x 8.7in / 24.9 lb
LHBM-200W-40K-DV2-NA-F-WHHM-4	4	24.8in x 11.1in x 8.7in / 31.1 lb
LHBL-270W-40K-DV2-NA-F-WHHM-4	4	32.2in x 11.1in x 8.7in/ 42.1 lb

Photometric Specification

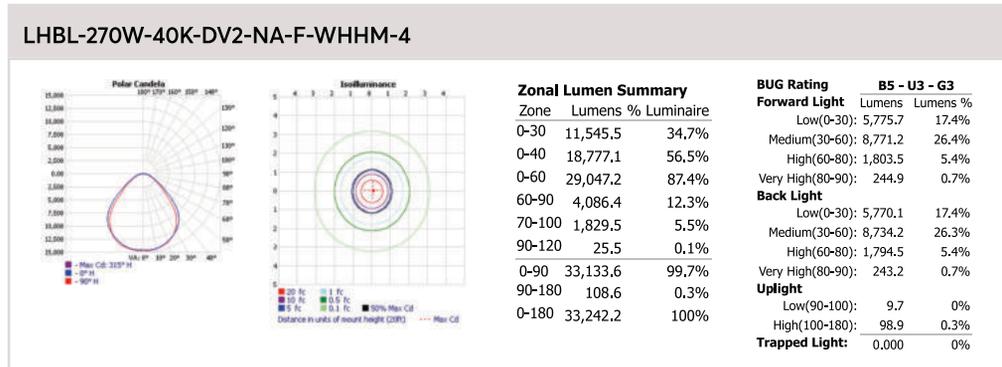

Accessories



Chain Kit
(included)



V-Hook
(included)



Double-lock
cable kit
LHB-DBLC10



Wire
Guards
LHBS-WG | LHBM-WG |
LHBL-WG


ROUND HIGHBAYS

UFO Series

High Power, Low Cost



- Easy Install
- 0-10V Dimming
- Diecast Aluminum
- Motion Sensor (optional)
- Wet Rated

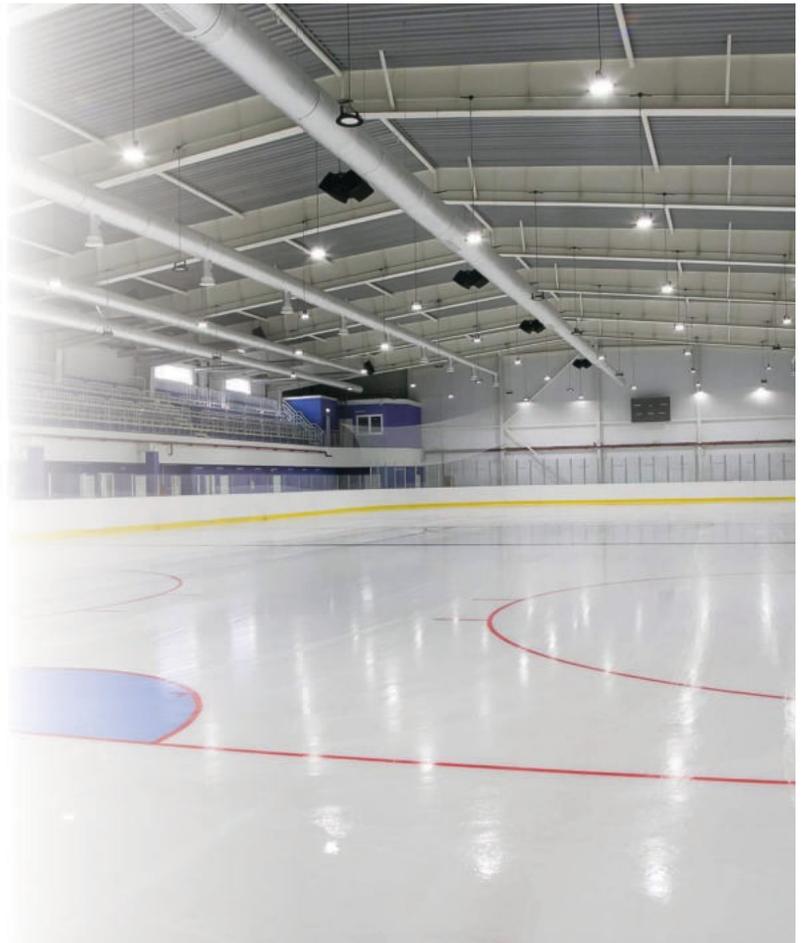

Product Specifications

Light Output: 14,500 – 35,000 Lumens

Wattage: 100 – 240 Watts

Replaces: Up to 1000W MH

Efficacy: Up to 145 LPW

CCT Options: 4000K, 5000K

CRI Options: 80 CRI

Finish Color: Bronze

Mounting: Pendant Mount



Performance Specification

Catalog Number	Wattage	CCT	Lumens	Efficacy (LPW)	CRI	Input Voltage
UFOS-100W-40K/50K-DV2-NA-90-BZHM	100	4000K, 5000K	14,500	145	>80	120-277V
UFOM-150W-40K/50K-DV2-NA-90-BZHM	150	4000K, 5000K	22,000	145	>80	120-277V
UFOL-200W-40K/50K-DV2-NA-90-BZHM	200	4000K, 5000K	29,000	145	>80	120-277V
UFOX-240W-40K/50K-DV2-NA-90-BZHM	240	4000K, 5000K	35,000	145	>80	120-277V

Product Dimensions




	UFOS-100W	UFOM-150W	UFOL-200W	UFOX-240W
A	10.8 in	10.8 in	12.6 in	12.6 in
B	10.8 in	10.8 in	12.6 in	12.6 in
C	4.6 in	4.6 in	5.0 in	5.0 in

Packaging Dimensions

Catalog Number	Master Pack Quantity	Dimensions
UFOS-100W-50K-DV2-NA-90-BZHM	4	15.7in x 11.6in x 11.6in/20.3 lb
UFOM-150W-50K-DV2-NA-90-BZHM	4	15.7in x 11.6in x 11.6in/20.3 lb
UFOL-200W-50K-DV2-NA-90-BZHM	4	17.3in x 13.9in x 13.9in/28.2 lb
UFOX-240W-50K-DV2-NA-90-BZHM	4	17.3in x 13.9in x 13.9in/28.2 lb

Photometric Specification

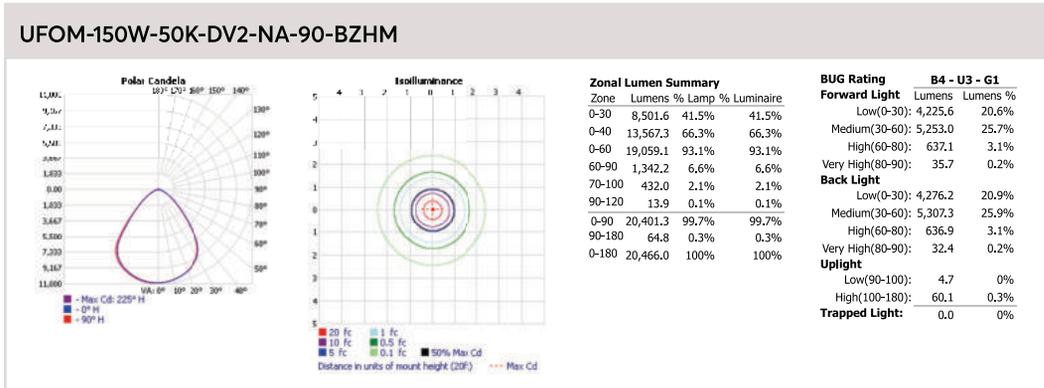

Accessories





LED RECESSED LIGHTING




CANLESS DOWNLIGHTS

DLR Series

Recessed Radiance Reigns



-  Easy Install
-  Triac Dimming
-  120V
-  White Color CCT Selectable

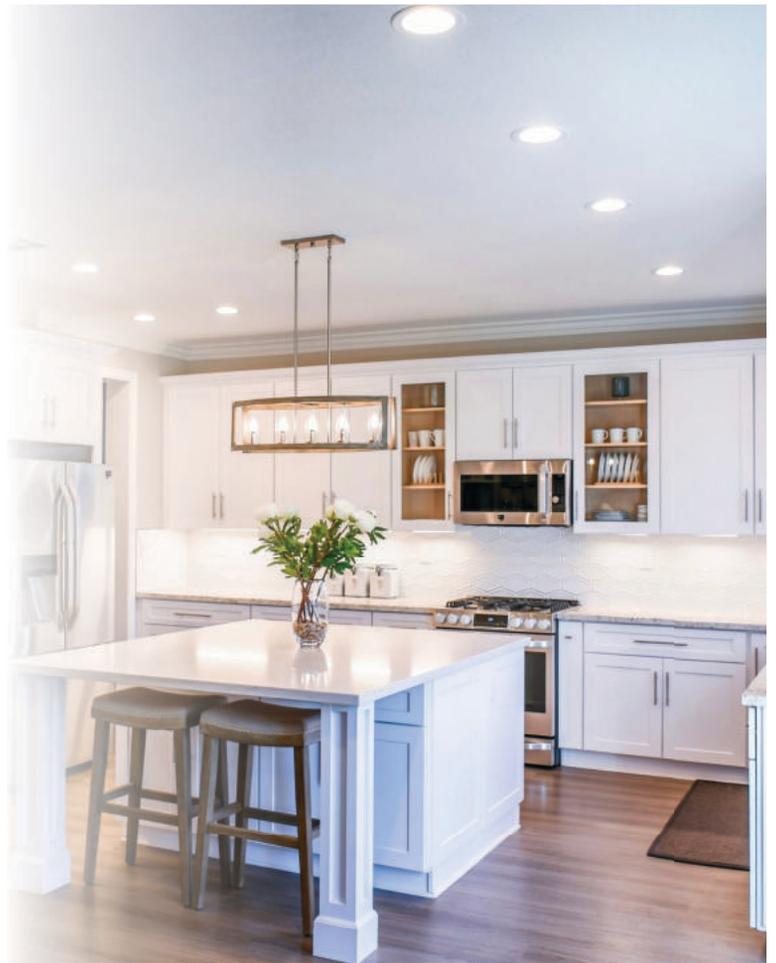

Product Specifications

Light Output: 700– 1000 Lumens

Wattage: 9– 12 Watts

Replaces: 75W Incandescent

Efficacy: Up to 84LPW

CCT Selectable: 2700K, 3000K, 3500K, 4000K, 5000K

CRI Options: 80 CRI

Finish Color: White


Mounting: Dry Wall Recessed Tension Clips



Performance Specification

Catalog Number	Size	Wattage	CCT	Lumens	Dimming	Efficacy (LPW)	CRI	Input Voltage
DLR4-9W-CCT-DV1-NA-F-WH	4 In	9W	2700K-5000K	700	Triac	78	>80	120V
DLR6-12W-CCT-DV1-NA-F-WH	6 In	12W	2700K-5000K	1000	Triac	84	>80	120V

Product Dimensions




DLR4-9W	
A	4.7 in
B	4.7 in
C	1.1 in

DLR6-12W	
A	6.7 in
B	6.7 in
C	1.1 in


Packaging Dimensions

Catalog Number	Master Pack Quantity	Dimensions
DLR4-9W-CCT-DV1-NA-F-WH	40	20.4 in x 14.2in x 11.0in/30.0 lb
DLR6-12W-CCT-DV1-NA-F-WH	30	21.9 in x 14.8in x 11.2in/29.5 lb

Photometric Specification


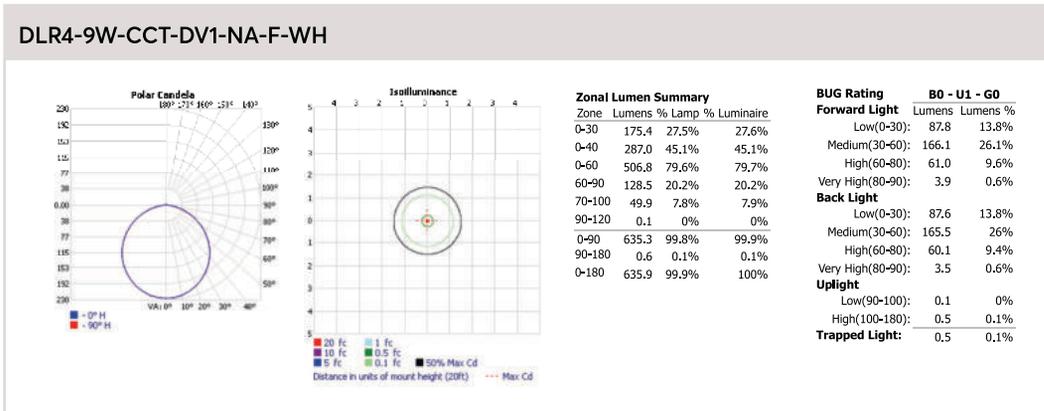


Accessories



Guide Plate
DLR4-GP
DLR6-GP

Installation

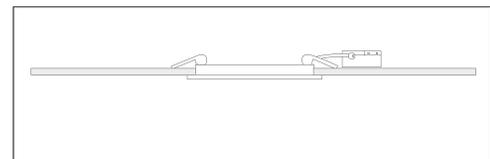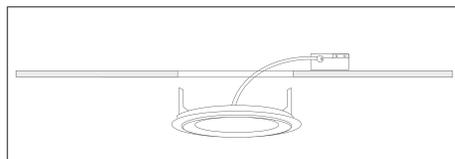


SQUARE DOWNLIGHTS

DLS Series

Effortlessly stylish lighting



-  Easy Install
-  Triac Dimming
-  120V
-  White Color CCT Selectable

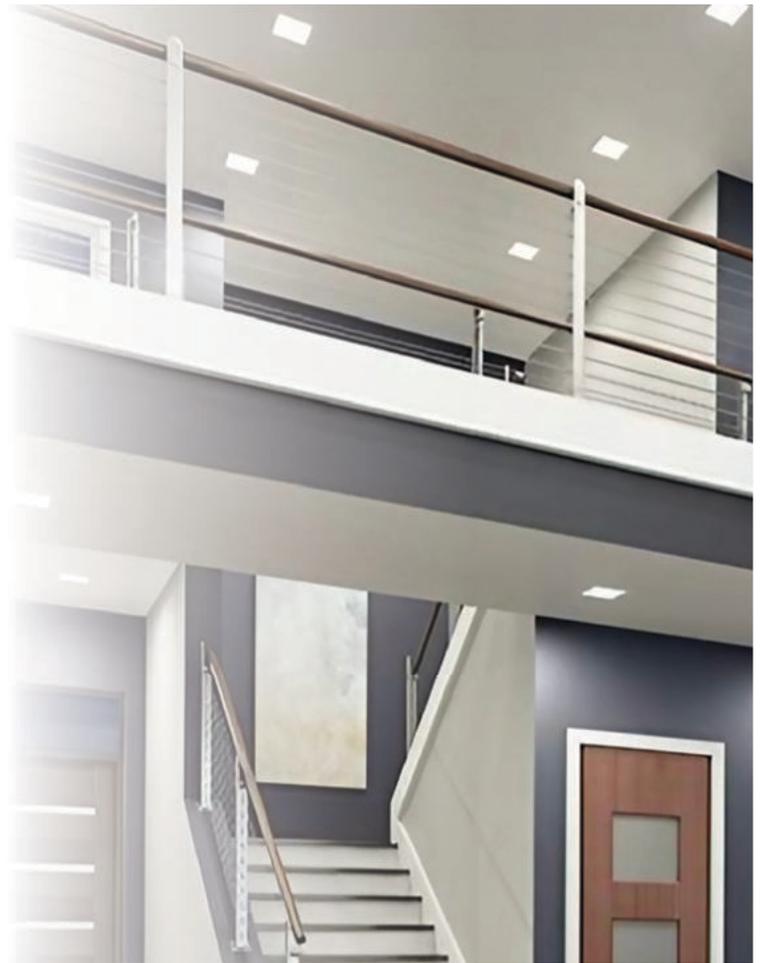

Product Features

Light Output: 700– 1000 Lumens

Wattage: 9– 12 Watts

Replaces: 75W Incandescent

Efficacy: Up to 84 LPW

CCT Selectable: 2700K, 3000K, 3500K, 4000K, 5000K

CRI Options: 80 CRI

Finish Color: White


Mounting: J-Box Surface Mount, E26 Retrofit Can Installation



Performance Specification

Catalog Number	Size	Wattage	CCT	Lumens	Dimming	Efficacy (LPW)	CRI	Input Voltage
DLS4-9W-CCT-DV1-NA-F-WH	4 In	9W	2700K-5000K	700	Triac	78	>80	120V
DLS7-12W-CCT-DV1-NA-F-WH	7 In	12W	2700K-5000K	1000	Triac	84	>80	120V

Product Dimensions

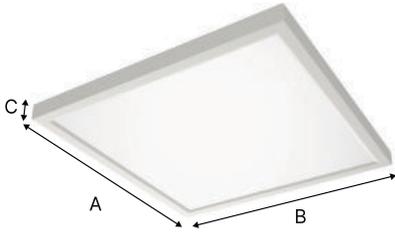


DLS4-9W	
A	5.0 in
B	5.0 in
C	1.1 in

DLS7-12W	
A	7.5 in
B	7.5 in
C	1.3 in


Packaging Dimensions

Catalog Number	Master Pack Quantity	Dimensions
DLS4-9W-CCT-DV1-NA-F-WH	40	22.0 in x 11.6in x 10.6in/28.6 lb
DLS7-12W-CCT-DV1-NA-F-WH	40	20.5 in x 16.5in x 16.1in/46.1 lb

Photometric Specification

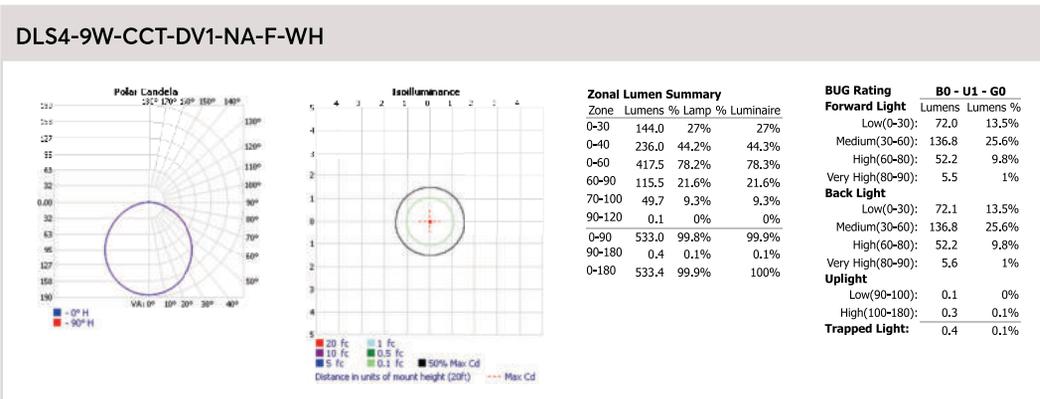

Installation

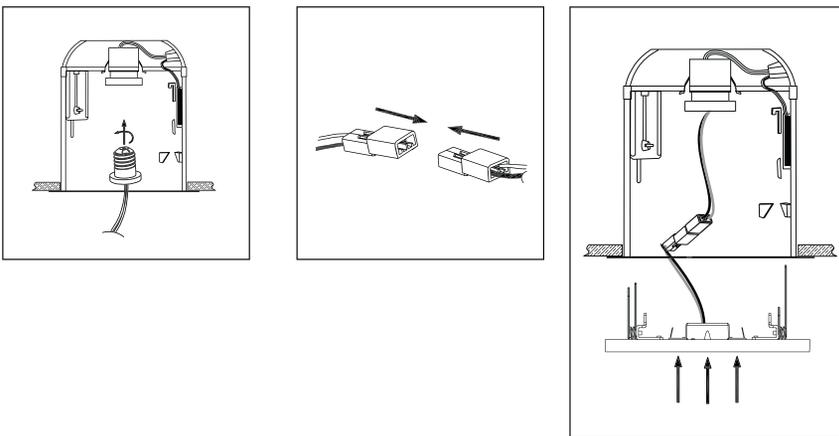

RETROFIT DOWNLIGHTS

RDLR Series

Effortlessly stylish lighting



-  Easy Install
-  Triac Dimming
-  120V
-  White Color CCT Selectable



Product Features

Light Output: 600– 900 Lumens

Wattage: 9– 12 Watts

Replaces: Up to 75W Incandescent

Efficacy: Up to 75 LPW

CCT Selectable: 2700K, 3000K, 3500K, 4000K, 5000K

CRI Options: 80 CRI

Finish Color: White

Mounting: E26 Retrofit Spring Clip Can Installation



IC
RATED



Performance Specification

Catalog Number	Size	Wattage	CCT	Lumens	Dimming	Efficacy (LPW)	CRI	Input Voltage
RDLR4-9W-CCT-DV1-NA-F-WH	4 In	9W	2700K-5000K	600	Triac	78	>80	120V
RDLR6-12W-CCT-DV1-NA-F-WH	6 In	12W	2700K-5000K	900	Triac	84	>80	120V

Product Dimensions




RDLR4-9W	
A	5.0 in
B	5.0 in
C	1.7 in

RDLR6-12W	
A	7.4 in
B	7.4 in
C	2.3 in


Packaging Dimensions

Catalog Number	Master Pack Quantity	Dimensions
RDLR4-9W-CCT-DV1-NA-F-WH	40	22.0 in x 11.8in x 11.4in/17.6 lb
RDLR6-12W-CCT-DV1-NA-F-WH	30	23.8 in x 16.5in x 13.6in/22.4 lb

Photometric Specification

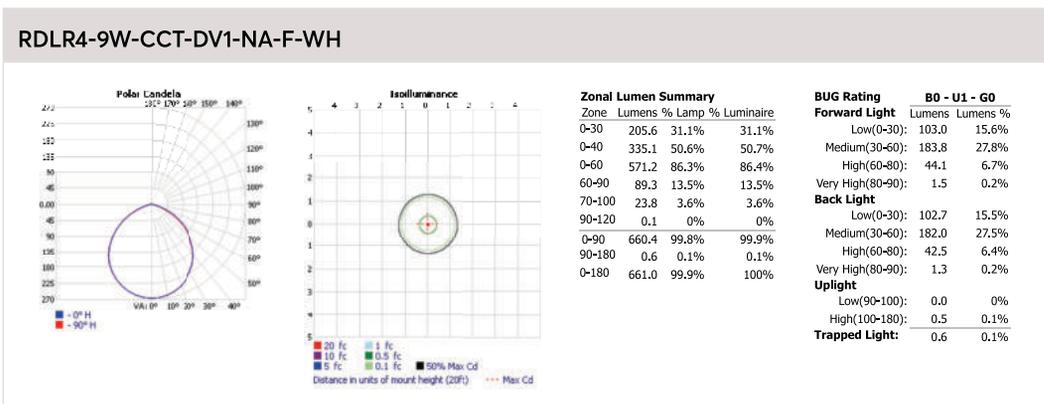

Installation

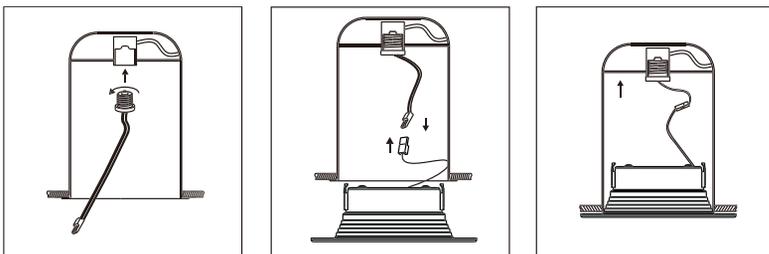

DISC LIGHTS

DSCR Series

Advanced lighting made simple



-  Easy Install
-  Triac Dimming
-  120V
-  White Color CCT Selectable



Product Specifications

Light Output: 1000 Lumens

Wattage: 15 Watts

Replaces: Up to 75W Incandescent

Efficacy: Up to 67 LPW

CCT Selectable: 2700K, 3000K, 3500K, 4000K, 5000K

CRI Options: 80 CRI

Finish Color: White

Mounting: J-Box Surface Mount, E26 Retrofit Spring Clip Can Installation




IC
RATED



Performance Specification

Catalog Number	Size	Wattage	CCT	Lumens	Dimming	Efficacy (LPW)	CRI	Input Voltage
DSCR6-15W-CCT-DV1-NA-F-WH	4 In	15W	2700K-5000K	1000	Triac	67	>80	120V

Product Dimensions

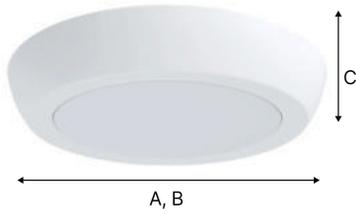


DSCR6-15W	
A	7.4 in
B	7.4 in
C	1.3 in


Packaging Dimensions

Catalog Number	Master Pack Quantity	Dimensions
DSCR6-15W-CCT-DV1-NA-F-WH	40	23.2 in x 22.4in x 8.5in/28.2 lb

Photometric Specification

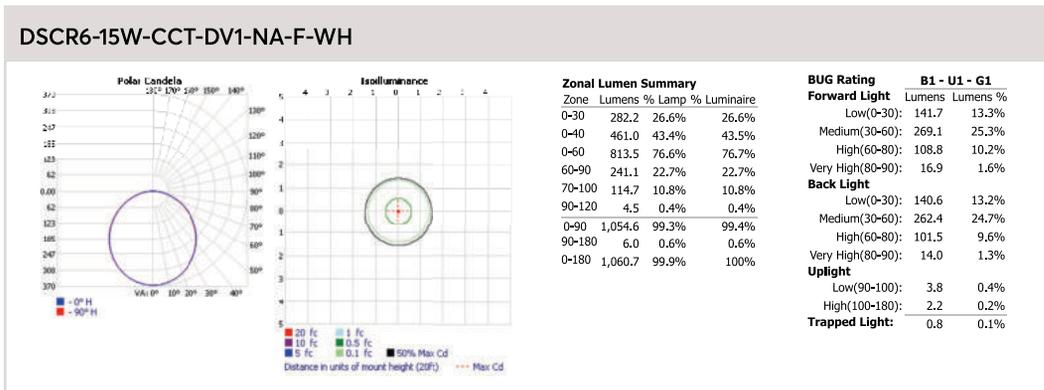

Installation

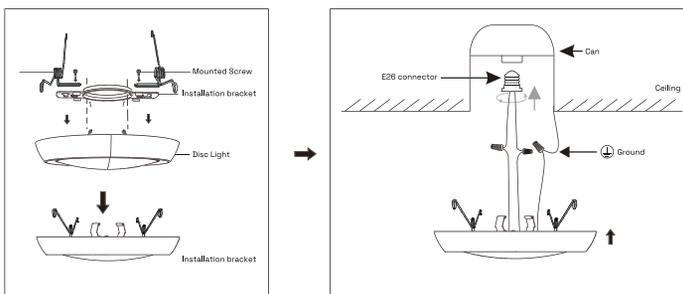


GIMBAL DOWNLIGHTS

GDLR Series

Adjustable brilliance awaits



- Easy Install
- Triac Dimming
- 120V
- White Color CCT Selectable
- Adjustable Lens

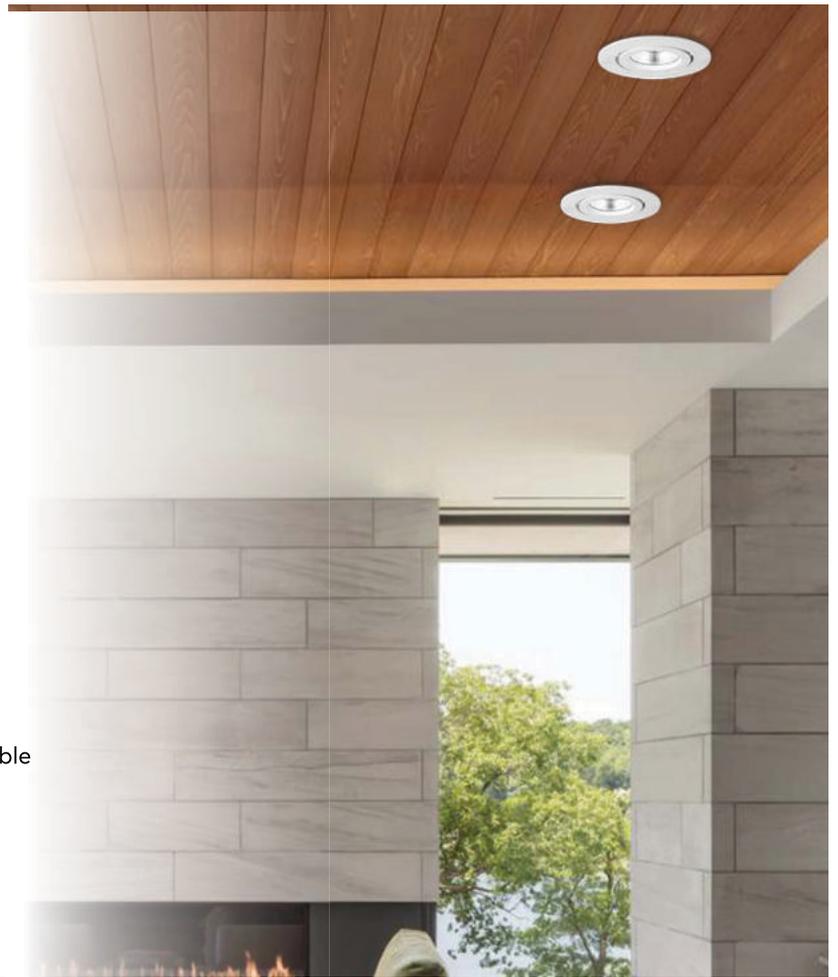

Product Specifications

Light Output: 700– 1000 Lumens

Wattage: 9– 12 Watts

Replaces: Up to 75W Incandescent

Efficacy: Up to 84 LPW

CCT Selectable: 2700K, 3000K, 3500K, 4000K, 5000K

CRI Options: 80 CRI

Finish Color: White

Mounting: Dry Wall Recessed Tension Clip



**IC
RATED**




Performance Specification

Catalog Number	Size	Wattage	CCT	Lumens	Dimming	Efficacy (LPW)	CRI	Input Voltage
GDLR4-9W-CCT-DV1-NA-F-WH	4 In	9W	2700K-5000K	700	Triac	78	>80	120V
GDLR6-12W-CCT-DV1-NA-F-WH	6 In	12W	2700K-5000K	1000	Triac	84	>80	120V

Product Dimensions



GDLR4-9W	
A	5.0 in
B	5.0 in
C	1.5 in




GDLR6-12W	
A	7.0 in
B	7.0 in
C	1.6 in

Packaging Dimensions


Catalog Number	Master Pack Quantity	Dimensions
GDLR4-9W-CCT-DV1-NA-F-WH	40	21.4 in x 16.5in x 11.2in/32.9 lb
GDLR6-12W-CCT-DV1-NA-F-WH	30	22.4 in x 17.5in x 15.3in/29.1 lb

Photometric Specification

GDLR4-9W-CCT-DV1-NA-F-WH


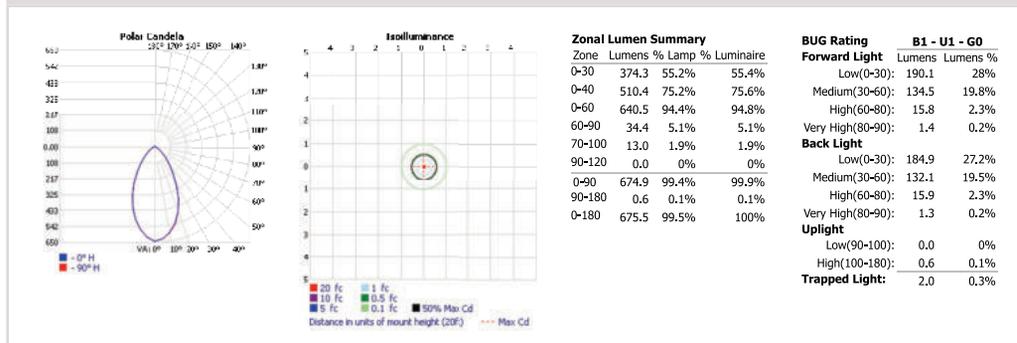


Accessories



Guide Plate
DLR4-GP
DLR6-GP

Installation

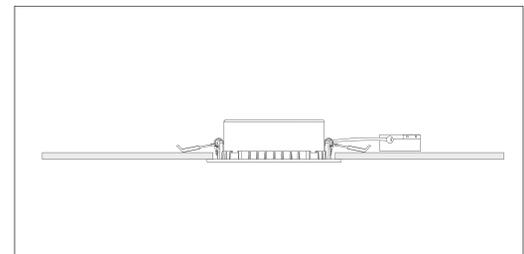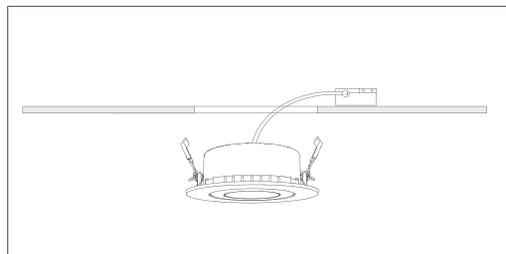

A photograph of a modern exit door. The door is dark-colored with a large glass window. Above the door is a rectangular sign with the word "EXIT" in red capital letters. The door is set in a light-colored wall. The door is slightly ajar, showing a glimpse of the outside world.

EXIT

EXIT &
EMERGENCY
LIGHTING




EMERGENCY/EXIT SIGN COMBO

ESC-C-S-01/02

Evacuate with ease



-  Easy Install
-  90 Minute Emergency Egress
-  120-277V
-  Battery Powered
-  Selectable RED/GREEN

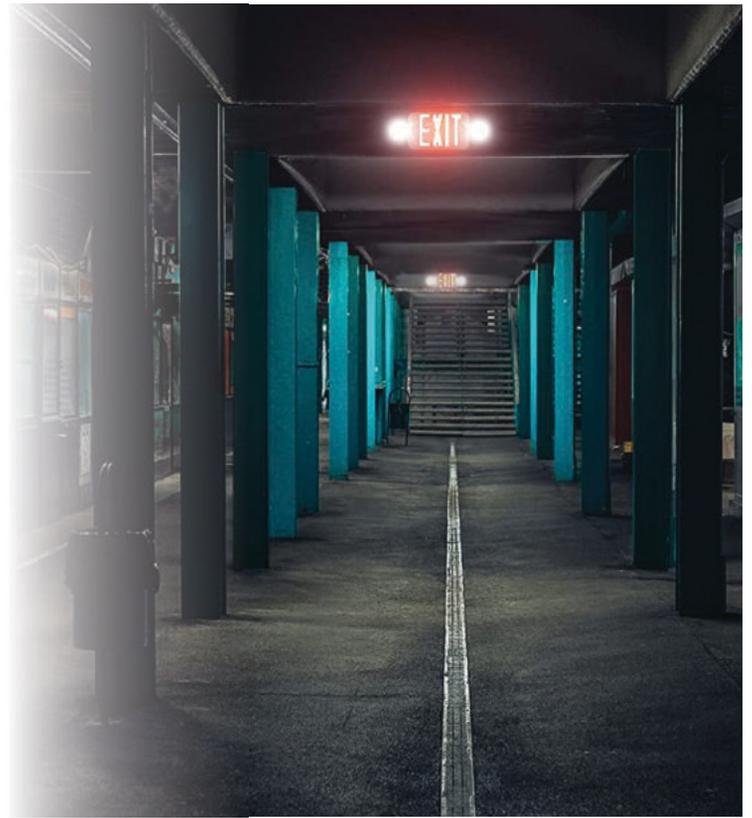

Product Specifications

Battery:

ESC-C-S-01 : Built-in 3.6V 1000mAh Ni-MH battery
 ESC-C-S-02 : Built-in 3.6V 2000mAh Ni-MH battery

Voltage: 120/277V

Emergency Run Time: 90 Minutes

Battery Charging Time: 24 hours

Housing: Injection-mold thermoplastic ABS housing, UL 94V-0 flame rating

Finish Color: White

Mounting: Universal J-Box mounting

Lettering Options: Selectable Red/Green



Performance Specification

Catalog Number	Rated Voltage	Input Current	Input Watt	LED Type	Charging Time	Emergency Run Time
ESC-C-S-01	120/277V	0.032-0.017A	2W	6 LEDs for red version/ 6 LEDs for green version +2 lamp heads	24 Hrs	90 Mins
ESC-C-S-02	120/277V	0.047-0.028A	2.8W	6 LEDs for red version/6 LEDs for green version 2 lamp heads, 2W remote loads	24 Hrs	90 Mins

Product Dimensions



ESC-C-S-01 / ESC-C-S-01	
A	16.5 in
B	7.2 in
C	2 in

EXIT SIGNS

ES-C-S Series

Lifesaving illumination



-  Easy Install
-  90 Minute Emergency Egress
-  120-277V
-  Battery Powered
-  RED EXIT Letter



Product Specifications

Housing: Injection-mold thermoplastic ABS housing, UL 94V-0 flame rating.

Voltage: 120/277V

Emergency Run Time: 90 Minutes

Battery Charging Time: 24 hours

Battery: Built-in 1.2V 1000mAh Nickel cadmium battery

Finish Color: White

Mounting: Universal J-Box mounting


Lettering Options: Red



Performance Specification

Catalog Number	Rated Voltage	Input Current	Input Watt	LED Type	Charging Time	Emergency Run Time
ES-C-S	120/277V	0.015-0.008A	1.9W	12Pcs Red LEDs	24 Hrs	90 Mins

Product Dimensions



ES-C-S	
A	11.6 in
B	7.4 in
C	1.7 in

WET LOCATION EXIT SIGN COMBO

ESC-S-W

Efficient emergency guidance



-  Easy Install
-  90 Minute Emergency Egress
-  120-277V
-  Battery Powered
-  RED EXIT Letter
-  Wet Rated



Product Specifications

Housing: Injection-molded thermoplastic ABS housing and polycarbonate cover, UL 94V-0 flame rating.

Voltage: 120/277V

Emergency Run Time: 90 Minutes

Battery: Built-in 3.6V 1200mAh Ni-Mh battery for minimum 90 minutes

Finish Color: White

Mounting: Universal J-Box mounting

IP Rating: IP65

Lettering Options: Red


Battery Charging Time: 24 hours



Performance Specification

Catalog Number	Rated Voltage	Input Current	Input Watt	LED Type	Charging Time	Emergency Run Time
ESC-S-W	120/277V	0.026-0.015A	2.9W	10Pcs Red LEDs	24 Hrs	90 Mins

Product Dimensions



ESC-S-W	
A	12.5 in
B	8.0 in
C	2.56 in

WET LOCATION EMERGENCY LIGHT

DH-EL-W

Wet Location Dual Head
Emergency Light



-  Easy Install
-  90 Minute Emergency Egress
-  120-277V
-  Battery Powered
-  Wet Rated



Product Specifications

Battery: Built-in 3.6V 2000mAh Nickel cadmium battery

Light Output: 220 Lumens

Voltage: 120/277V

Emergency Run Time: 90 Minutes

Housing: Injection-mold thermoplastic ABS housing, UL 94V-0 flame rating.

Finish Color: White

Mounting: Universal J-Box mounting

IP Rating: IP65

Battery Charging Time: 24 hours



Performance Specification

Catalog Number	Rated Voltage	Input Current	Input Watt	LED Type	Charging Time	Emergency Run Time
DH-EL-W	120/277V	0.025-0.010A	2.4W	2x12pcs ultra bright 2835 SMT LED lamp	24 Hrs	90 Mins

Product Dimensions



DH-EL-W	
A	12.3 in
B	5.2 in
C	4.2 in

EMERGENCY LIGHTS-ROUND

DH-EL-RD

Indoor Dual Head Emergency Light



-  Easy Install
-  90 Minute Emergency Egress
-  120-277V
-  Battery Powered



Product Specifications

Battery: Built-in 3.6V 1000mAh Nickel cadmium battery

Light Output: 180 Lumens

Voltage: 120/277V

Emergency Run Time: 90 Minutes

Housing: Injection-mold thermoplastic ABS housing, UL 94V-0 flame rating.

Finish Color: White

Mounting: Universal J-Box mounting


Battery Charging Time: 24 hours



Performance Specification

Catalog Number	Rated Voltage	Input Current	Input Watt	LED Type	Charging Time	Emergency Run Time
DH-EL-RD	120/277V	0.020/0.010A	2W	2835 SMT LED lamp	24 Hrs	90 Mins

Product Dimensions

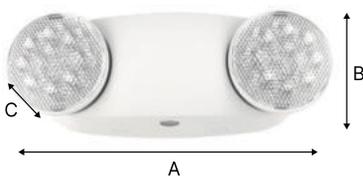

DH-EL-SQ	
A	11.0 in
B	4.3 in
C	2.6 in

EMERGENCY LIGHTS-SQUARE

DH-EL-SQ

Indoor Dual Head Emergency Light



-  Easy Install
-  90 Minute Emergency Egress
-  120-277V
-  Battery Powered



Product Specifications

Battery: Built-in 3.6V 1000mAh Nickel cadmium battery

Light Output: 180 Lumens

Voltage: 120/277V

Emergency Run Time: 90 Minutes

Housing: Injection-mold thermoplastic ABS housing, UL 94V-0 flame rating.

Finish Color: White

Mounting: Universal J-Box mounting


Battery Charging Time: 24 hours



Performance Specification

Catalog Number	Rated Voltage	Input Current	Input Watt	LED Type	Charging Time	Emergency Run Time
DH-EL-SQ	120/277V	0.02/0.01A	2.4W	2x8pcs ultra bright 2835 SMT LED lamp	24 Hrs	90 Mins

Product Dimensions

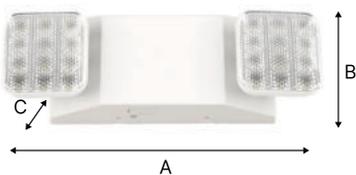

DH-EL-SQ	
A	13.7 in
B	3.9 in
C	3.5 in

EDGE-LIT EXIT SIGNS

EDGE-ES-01/02

Sleek safety illumination



-  Easy Install
-  120-277V
-  Battery Powered
-  Single Face



Product Specifications

Housing: Aluminum housing with high grade acrylic panel.

Voltage: 120/277V

Emergency Run Time: 180 Minutes

Battery Charging Time: 24 hours

Battery: Built-in 3.6V 600mAh Nickel cadmium battery for minimum 90 minutes

Finish Color: Aluminum Housing and Clear Lens

Mounting: Aluminum mounting plate allows top, back or end mount

Lettering Options: Red, Green



Performance Specification

Catalog Number	Rated Voltage	Input Current	Input Watt	LED Type	Charging Time	Emergency Run Time
EDGE-ES-01	120/277V	0.027-0.013A	3.5W	12Pcs Red LEDs	24 Hrs	180 Mins
EDGE-ES-02	120/277V	0.027-0.013A	3.5W	12Pcs Green LEDs	24 Hrs	180 Mins

Product Dimensions



EDGE-ES-01/EDGE-ES-02	
A	12.7 in
B	10.7 in
C	1.6 in

EDGE-LIT EXIT SIGN LIGHT

WITH OPTIONAL INDICATORS

EDGE-ES-S-03

Efficient emergency guidance



- Easy Install
- 120-277V
- Battery Powered
- RED EXIT Letter
- Single Face



Product Specifications

Housing: Aluminum housing with high grade acrylic panel.

Voltage: 120/277V

Emergency Run Time: 90 Minutes

Battery Charging Time: 24 hours

Battery: Built-in 4.8V 400mAh Nickel cadmium battery for minimum 90 minutes.

Finish Color: Aluminum Housing and Clear Lens.

Mounting: Plastic mounting plate allows top, back or end mount


Lettering Options: Red



Performance Specification

Catalog Number	Rated Voltage	Input Current	Input Watt	LED Type	Charging Time	Emergency Run Time
EDGE-ES-S-03	120/277V	0.035A-0.025A	2.5W	8pcs Super bright RED LED	24 Hrs	90 Mins

Product Dimensions



EDGE-ES-01/EDGE-ES-02	
A	12.1 in
B	9.8 in
C	1.8 in

A photograph of a brick building at night. A tall, slender pole holds a rectangular security light fixture that is illuminated, casting a glow on the brick wall. To the right, a dark door is visible. The scene is dimly lit, with the primary light source being the security light.

EXTERIOR
SECURITY
LIGHTS
& POLES



LED WALLPACKS

WPL Series

Shine Brighter, Farther.



- Diecast Aluminum
- Easy Install
- 0-10V Dimming
- 120-277V
- Wet Rated
- Integral Photocell



Product Features

Light Output: 8000 - 16,000 Lumens

Wattage: 60 – 120 Watts

Replaces: Up to 400W MH

Efficacy: Up to 142 LPW

CCT Options: 4000K, 5000K

CRI Options: 80 CRI

Finish Options: Bronze

Mounting: Wall Mount

Housing: Die-cast Aluminum

Diffusor type: Polycarbonate



Performance Specification

Catalog Number	Wattage	CCT	Lumens	Efficacy (LPW)	CRI	Input Voltage
WPLM-60W-40K/50K-DV2-PC-CL-BZ	60	4000K, 5000K	8000	134	>80	120-277V
WPLM-80W-40K/50K-DV2-PC-CL-BZ	80	4000K, 5000K	11,000	138	>80	120-277V
WPLL-100W-40K/50K-DV2-PC-CL-BZ	100	4000K, 5000K	14,000	140	>80	120-277V
WPLL-120W-40K/50K-DV2-PC-CL-BZ	120	4000K, 5000K	16,000	134	>80	120-277V

Product Dimensions




WPLM-60W/80W WPLL-100W/120W	
A	13.1 in
B	9.6 in
C	5.0 in

Packaging Dimensions

Catalog Number	Master Pack Quantity	Dimensions
WPLM-60W-50K-DV2-PC-CL-BZ	2	14.7in X 11.8in X 10.9in/ 13.0 lb
WPLM-80W-50K-DV2-PC-CL-BZ	2	14.7in X 11.8in X 10.9in/ 13.0 lb
WPLL-100W-50K-DV2-PC-CL-BZ	2	14.7in X 11.8in X 10.9in/ 13.0 lb
WPLL-120W-50K-DV2-PC-CL-BZ	2	14.7in X 11.8in X 10.9in/ 13.2 lb


Photometric Specification

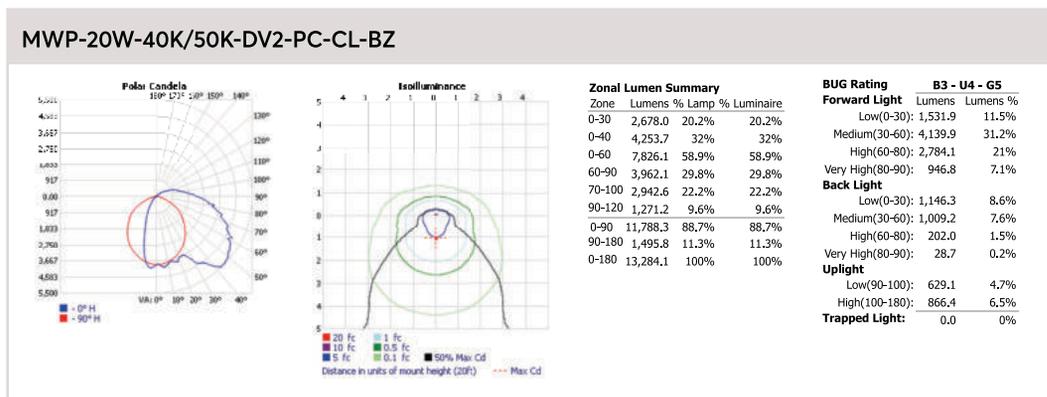

Accessories



Glare Shield
WPL-GS



Wire Guard
WPL-WG

LED WALLPACKS

PowerWallX Series

Traditional with a modern touch



- Diecast Aluminum
- Easy Install
- 0-10V Dimming
- 120-277V
- Wide Angle Optics
- Integral Photocell



Product Features

Light Output: 3,500– 10,000 Lumens

Wattage: 28– 80 Watts

Replaces: Up to 250W MH

Efficacy: Up to 125 LPW

CCT Options: 4000K

CRI Options: 70 CRI

Finish Color: Bronze

Mounting: Wall Mount



Performance Specification

Catalog Number	Wattage	CCT	Lumens	Efficacy (LPW)	CRI	Input Voltage
PRWX28-H-4K-BZ	28	4000K	3500	125	>70	120-277V
PRWX50-H-PC-4K-BZ/ WH	50	4000K	6500	130	>70	120-277V
PRWX80-H-PC-4K-BZ	80	4000K	10,000	125	>70	120-277V

Product Dimensions




	PRWX28	PRWX50	PRWX80
A	9.4 in	11.4 in	13.1 in
B	6.1 in	7.9 in	9.2 in
C	4.3 in	5.4 in	6.2 in

Packaging Dimensions

Catalog Number	Master Pack Quantity	Dimensions
PRWX28-H-4K-BZ	4	16.4in x 12.7in x 11.3in/13.9 lb
PRWX50-H-PC-4K-BZ/WH	3	22.8in x 13.3in x 10.2in/16.9 lb
PRWX80-H-PC-4K-BZ	2	16.4in x 15.0in x 11.5in/16.2 lb

Photometric Specification

PRWX50-H-PC-4K-BZ/WH

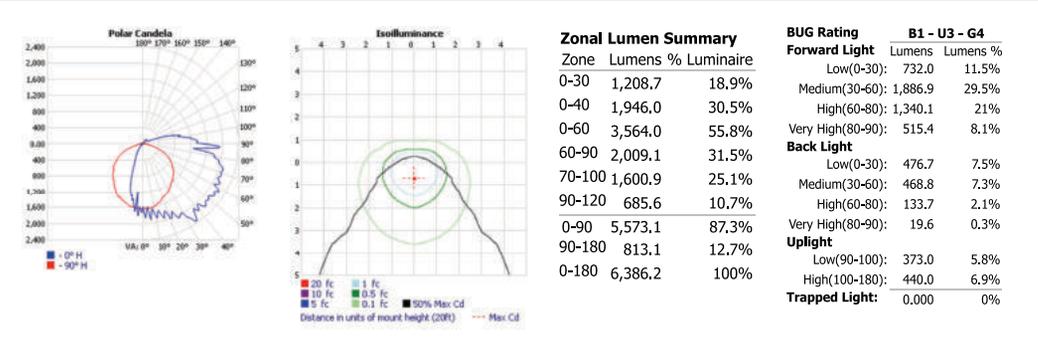

LED MINI WALLPACKS

MWP Series

Maximize light, minimize size, unstoppable shine!



- Diecast Aluminum
- Easy Install
- 0-10V Dimming
- 120-277V
- Wet Rated
- Integral Photocell



Product Features

Light Output: 2000 – 4000 Lumens

Wattage: 15 - 30 Watts

Replaces: Up to 150W MH

Efficacy: Up to 141 LPW

CCT Options: 4000K, 5000K

CRI Options: 80 CRI

Finish Options: Bronze

Mounting: Wall Mount

Housing: Die-cast Aluminum

Diffusor type: Polycarbonate



Performance Specification

Catalog Number	Wattage	CCT	Lumens	Efficacy (LPW)	CRI	Input Voltage
MWP-15W-40K/50K-DV2-PC-CL-BZ	15	4000K, 5000K	2000	133	>80	120-277V
MWP-20W-40K/50K-DV2-PC-CL-BZ	20	4000K, 5000K	3000	120	>80	120-277V
MWP-30W-40K/50K-DV2-PC-CL-BZ	30	4000K, 5000K	4000	133	>80	120-277V

Product Dimensions





MWP-15W/20W/30W	
A	8.2 in
B	5.0 in
C	2.7 in

Packaging Dimensions

Catalog Number	Master Pack Quantity	Dimensions
MWP-15W-40K/50K-DV2-PC-CL-BZ	10	16.4 in x 11.2in x 9.4in/19.8 lb
MWP-20W-40K/50K-DV2-PC-CL-BZ	10	16.4 in x 11.2in x 9.4in/19.8 lb
MWP-30W-40K/50K-DV2-PC-CL-BZ	10	16.4 in x 11.2in x 9.4in/19.8 lb

Photometric Specification

MWP-20W-40K/50K-DV2-PC-CL-BZ



Zonal Lumen Summary			
Zone	Lumens	% Lamp	% Luminaire
0-30	684.2	24.8%	24.8%
0-40	1,102.9	39.9%	39.9%
0-60	1,994.9	72.2%	72.2%
60-90	693.4	25.1%	25.1%
70-100	351.6	12.7%	12.7%
90-120	48.1	1.7%	1.7%
0-90	2,688.3	97.3%	97.3%
90-180	73.8	2.7%	2.7%
0-180	2,762.1	100%	100%

BUG Rating B1 - U3 - G1		
Forward Light	Lumens	Lumens %
Low(0-30):	510.5	18.5%
Medium(30-60):	1,153.7	41.8%
High(60-80):	547.8	19.8%
Very High(80-90):	85.3	3.1%
Back Light		
Low(0-30):	173.7	6.3%
Medium(30-60):	157.3	5.7%
High(60-80):	52.7	1.9%
Very High(80-90):	7.6	0.3%
Uplight		
Low(90-100):	23.2	0.8%
High(100-180):	50.6	1.8%
Trapped Light:	0.0	0%

LED FLOOD LIGHTS

FLLS Series

Perfect blend of efficiency & value



- Diecast Aluminum
- Easy Install
- 0-10V Dimming
- 120-277V
- Wet Rated
- Integral Photocell
- Versatile Mounting



Product Features

Light Output: 2100– 21,000 Lumens

Wattage: 15 – 150 Watts

Replaces: Up to 400W MH

Efficacy: Up to 140 LPW

CCT Options: 4000K, 5000K

CRI Options: 80 CRI

Finish Options: Bronze

Mounting: Knuckle Mount, Trunion Mount

Housing: Die-cast Aluminum


Diffusor type: Clear Glass



Performance Specification

Catalog Number	Wattage	CCT	Lumens	Efficacy (LPW)	CRI	Input Voltage	Mounting
FLLS-15W-40K/50K-DV2-PC-CL-BZKM	15	4000K, 5000K	2100	140	>80	120-277V	Knuckle Mount
FLLS-25W-40K/50K-DV2-PC-CL-BZKM	25	4000K, 5000K	3200	124	>80	120-277V	Knuckle Mount
FLLS-35W-40K/50K-DV2-PC-CL-BZFM	35	4000K, 5000K	4500	129	>80	120-277V	Trunion Mount
FLLS-60W-40K/50K-DV2-PC-CL-BZFM	60	4000K, 5000K	8000	133	>80	120-277V	Trunion Mount
FLLS-80W-40K/50K-DV2-PC-CL-BZFM	80	4000K, 5000K	11,000	138	>80	120-277V	Trunion Mount
FLLS-100W-40K/50K-DV2-PC-CL-BZFM	100	4000K, 5000K	14,000	140	>80	120-277V	Trunion Mount
FLLS-150W-40K/50K-DV2-PC-CL-BZFM	150	4000K, 5000K	21,000	140	>80	120-277V	Trunion Mount

Product Dimensions

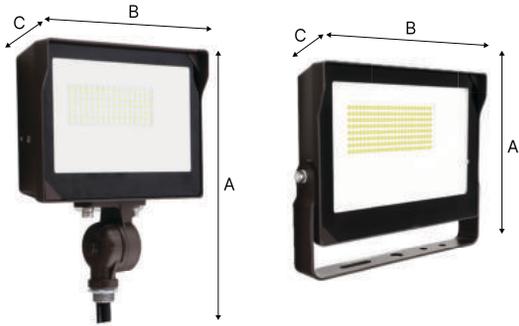


FLLS-15W-BZKM FLLS-25W-BZKM	
A	7.7 in
B	5.8 in
C	2.0 in

	FLLS-35W	FLLS-60W	FLLS-80W	FLLS-100W	FLLS-150W
A	7.2 in	8.7 in	10.2 in	10.2 in	11.5 in
B	6.3 in	7.7 in	8.8 in	8.8 in	9.7 in
C	2.2 in	2.2 in	2.7 in	2.7 in	2.8 in

Packaging Dimensions

Catalog Number	Master Pack Quantity	Dimensions
FLLS-15W-40K/50K-DV2-PC-CL-BZKM	10	15.9in x 14.5in x 11.0in /23.6 lb
FLLS-25W-40K/50K-DV2-PC-CL-BZKM	10	15.9in x 14.5in x 11.0in /23.6 lb
FLLS-35W-40K/50K-DV2-PC-CL-BZFM	10	19.1in x 14.6in x 9.1in/28.2 lb
FLLS-60W-40K/50K-DV2-PC-CL-BZFM	10	22.2in x 15.5in x 10.4in/42.3 lb
FLLS-80W-40K/50K-DV2-PC-CL-BZFM	5	17.5in x 11.6in x 13.1in/ 35.3 lb
FLLS-100W-40K/50K-DV2-PC-CL-BZFM	5	17.5in x 11.6in x 13.1in/ 35.3 lb
FLLS-150W-40K/50K-DV2-PC-CL-BZFM	5	18.5 in x 14.2in x 12.2in/47.3 lb

Photometric Specification

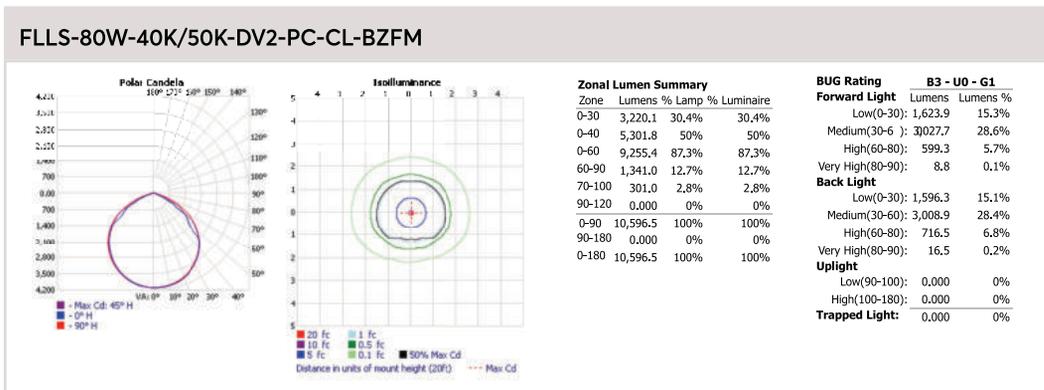

Accessories



FLLS-KM
Knuckle Mount



FLLS-YM
Yoke Mount



FLLS-AM
Slip Fitter Mount



FLLS-FM
Flush Mount

LED FLOOD/WALL COMBO

FusionX Series

Power and flexibility



- Diecast Aluminum
- 120V
- Integral Photocell
- Precision Optics
- White Color CCT Selectable



Product Features

Light Output: 1600 - 8000 Lumens

Wattage: 15 - 80 Watts

Replaces: Up to 250W MH

Efficacy: 107 LPW

CCT Selectable: 2700K, 3000K, 3500K, 4000K, 5000K

CRI Options: 70 CRI

Finish Options: Bronze, White


Mounting: Wall Mount, Flood Mount, Eave Mount



Performance Specification

Catalog Number	Wattage	CCT	Lumens	Efficacy (LPW)	CRI	Input Voltage
FSNX15-5CCT-BZ/WH	15	2700K-5000K	1600	107	>70	120V
FSNX28-5CCT-BZ/WH	28	2700K-5000K	3000	107	>70	120V
FSNX50-PC-4K-BZ	50	4000K	5000	100	>70	120V
FSNX80-PC-4K-BZ	80	4000K	8000	100	>70	120V

Product Dimensions

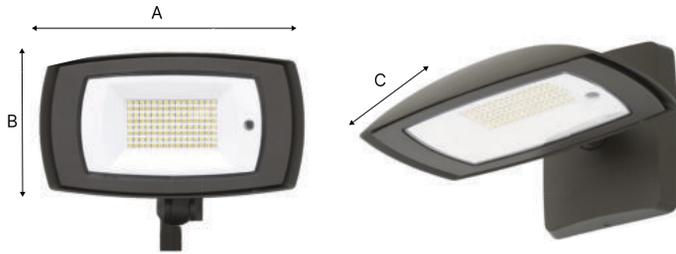


	FSNX15	FSNX28	FSNX50	FSNX80
A	7.7 in	8.7 in	9.9 in	11.0 in
B	4.4 in	4.8 in	5.8 in	6.3 in
C	1.3 in	1.4 in	1.6 in	2.0 in

Packaging Dimensions

Catalog Number	Master Pack Quantity	Dimensions
FSNX15-5CCT-BZ/WH	4	12.6in x 9.8in x 8.6in/9.7 lb
FSNX28-5CCT-BZ/WH	4	12.5in x 10.9in x 9.2in/11.2 lb
FSNX50-PC-4K-BZ	4	13.3in x 12.1in x 10.0in/14.7 lb
FSNX80-PC-4K-BZ	4	14.1in x 13.2in x 10.6in/19.7 lb

Photometric Specification

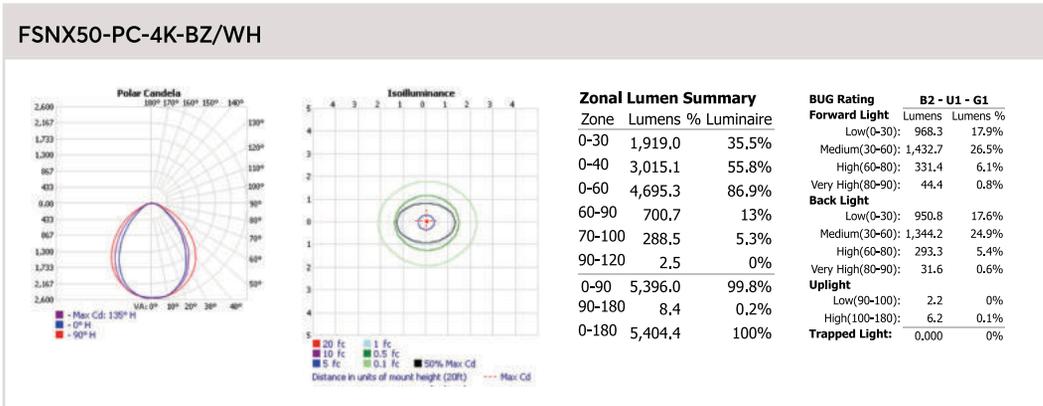

LED TWIN HEAD SECURITY LIGHTS

FusionX Duo Series

Aesthetic Security Light



- Diecast Aluminum
- 120V
- Motion Sensor (Optional)
- Integral Photocell
- 360° Adjustable Heads



Product Features

Light Output: 3200-6000 Lumens

CCT: 4000K

Wattage: 22-45 Watts

CRI Options: 70 CRI

Replaces: Up to 175W MH

Finish Options: Bronze, White

Efficacy: 145 LPW

Mounting: Wall Mount, Flood Mount, Eave Mount



Performance Specification

Catalog Number	Wattage	CCT	Lumens	Efficacy (LPW)	CRI	Input Voltage
FSXD30-MS-4K-BZ/WH*	22	4000K	3200	145	>70	120V
FSXD30-PC-4K-BZ/WH	22	4000K	3200	145	>70	120V
FSXD60-MS-4K-BZ/WH*	45	4000K	6000	133	>70	120V

*MS= Motion Activated Light

Product Dimensions




	FSXD30	FSXD60
A	12.7 in	15.3 in
B	8.0 in	8.0 in
C	1.7 in	1.7 in

Packaging Dimensions

Catalog Number	Master Pack Quantity	Dimensions
FSXD30-MS-4K-BZ/WH	4	19.5in x 13.6in x 10.1in/13.9 lb
FSXD30-PC-4K-BZ/WH	4	19.5in x 13.6in x 10.1in/13.0 lb
FSXD60-MS-4K-BZ/WH	4	21.1in x 15.0in x 11.0in/16.4 lb

Photometric Specification

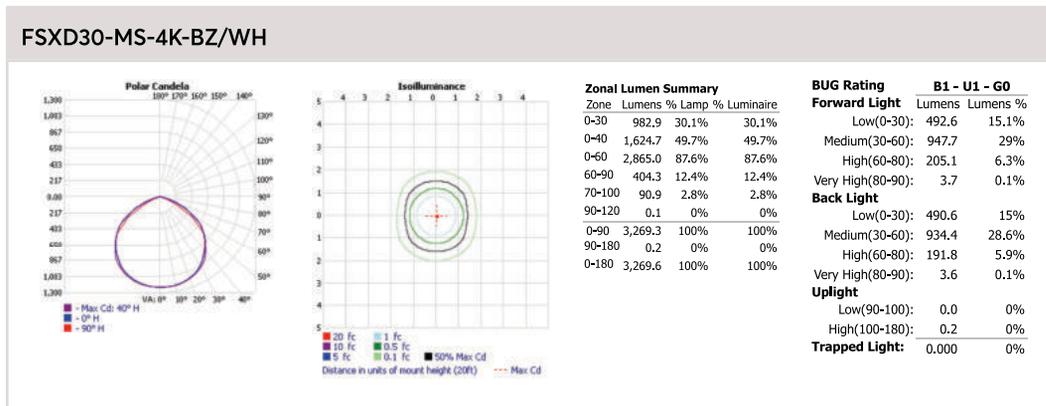


LED AREA LIGHTS

ARL Series

Next-gen performance at outstanding value.



- Diecast Aluminum
- Easy Install
- 0-10V Dimming
- 120-277V
- Wet Rated
- Type 3 Optics
- Integral Photocell

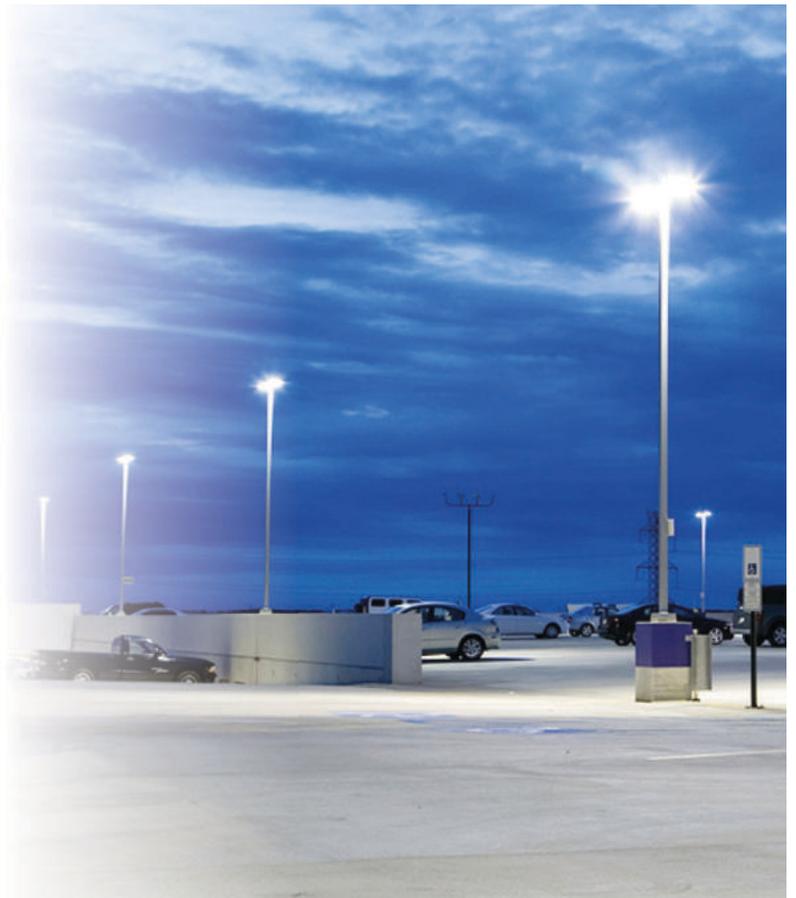

Product Features

Light Output: 14,500 – 29,000 Lumens

Wattage: 100 – 200 Watts

Replaces: Up to 400W MH

Efficacy: Up to 145 LPW

CCT Options: 4000K, 5000K

CRI Options: 70 CRI

Finish Options: Bronze

Mounting Options: Direct Arm Mount, Universal Mount, Trunnion Mount, Yoke Mount, Slip-fitter Mount **(Sold Separately)**

Housing: Die-cast Aluminum


Diffusor type: Clear Glass



Performance Specification

Catalog Number	Wattage	CCT	Lumens	Efficacy (LPW)	CRI	Input Voltage
ARLS-100W-40K/50K-DV2-PC-T3-BZ	100	4000K, 5000K	14,500	145	>70	120-277V
ARLM-150W-40K/50K-DV2-PC-T3-BZ	150	4000K, 5000K	22,000	147	>70	120-277V
ARLL-200W-40K-DV2-PC-T3-BZ	200	4000K	29,000	145	>70	120-277V

Product Dimensions

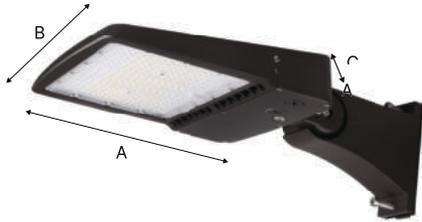


ARL -100W/150W/200W	
A	12.1 in
B	10.7 in
C	2.7 in

Packaging Dimensions

Catalog Number	Master Pack Quantity	Dimensions
ARLS-100W-40K/50K-DV2-PC-T3-BZ	1	20.2 in x 15.1in x 6.1in/8.2 lb
ARLM-150W-40K/50K-DV2-PC-T3-BZ	1	20.2 in x 15.1in x 6.1in/8.2 lb
ARLL-200W-40K-DV2-PC-T3-BZ	1	20.2 in x 15.1in x 6.1in/8.2 lb

Photometric Specification

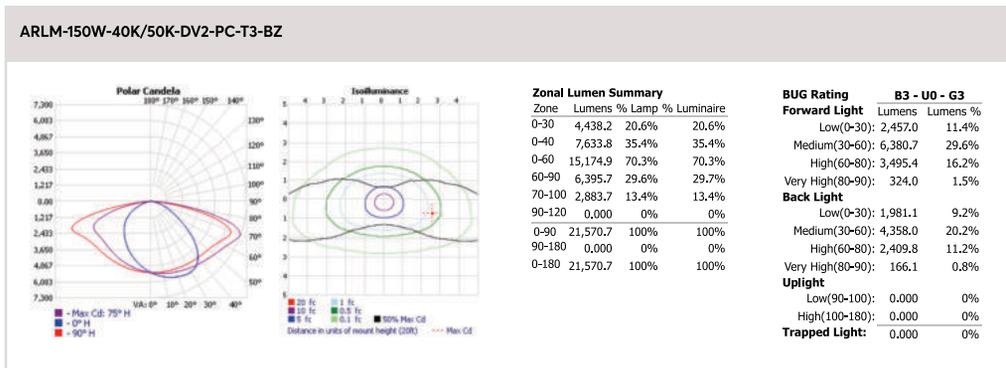

Accessories



ARL- AM
Slip fitter mount



ARL-DM
Direct arm mount



ARL-ADM
Universal mount



ARL-YM
Yoke mount



ARL-FM
Flush mount



ARL-GS
Glare Shield

SQUARE STRAIGHT STEEL POLES

SSS Series

Embrace the Edge: Square Poles.



Product Features

Build Quality : ASTM A500 Grade C (IS 2062 E350) with minimum yield strength of 50,000 PSI.

Base Plate : Base plates constructed of high strength ASTM A36 steel with 36,000 PSI minimum yield strength.

Finish : Hot dip galvanized base coat with TGIC-free polyester powder coat bronze finish.

Anchor Bolts : Galvanized high strength ASTM A55 anchor bolts (set of 4) with 55,000 PSI minimum yield strength.

Performance Specification

Model #	Height	Nominal Shaft Dimensions	Wall Thickness	Bolt Circle	Bolt Circle (Range)	Base Plate Square	Anchor Bolt Size	Pole Weight
SSS-4-G11-12-BZ	12ft	4"	0.119"	9"	8" - 11"	10.5"	3/4"x 30"x 4"	103 lbs
SSS-4-G11-15-BZ	15ft	4"	0.119"	9"	8" - 11"	10.5"	3/4"x 30"x 4"	127 lbs
SSS-4-G11-17-BZ	17ft	4"	0.119"	9"	8" - 11"	10.5"	3/4"x 30"x 4"	139 lbs
SSS-4-G11-20-BZ	20 ft	4"	0.119"	9"	8" - 11"	10.5"	3/4"x 30"x 4"	157 lbs
SSS-4-G11-25-BZ	25 ft	4"	0.119"	9"	8" - 11"	10.5"	3/4"x 30"x 4"	188 lbs
SSS-5-G11-30-BZ	30 ft	5"	0.119"	11"	10.5" - 12"	11"	1"x 36"x 4"	275 lbs

Anchor bolts : JB3044: Set of 4, 3/4"x 30" (included with 4" pole), JB3644: Set of 4, 1"x 36" (included with 5" pole)

ROUND STRAIGHT STEEL POLES

RSS Series

Embrace the Curves: Round Poles




Included Accessories:



Anchor Bolts



Template



Base Plate Cover



Hand Hole Cover



Product Features

Build Quality : ASTM A595 Grade A Carbon steel (Q235B) with minimum yield strength of 50,000 PSI.

Base Plate : Base Plates are carbon steel (ASTM A36).

Finish : Galvanized black polyester powder coat finish.

Anchor Bolts : Anchor bolts are partially galvanized per ASTM A153 specifications and furnished complete with 2 hex nuts and 2 plate washers

Mounting : These poles are built with a tenon top.
Single, twin, 180 and quad mounting brackets available (Sold Separately).

Performance Specification

Model #	Height	Nominal Shaft Dimensions	Wall Thickness	Bolt Circle	Bolt Circle (Range)	Base Plate Square	Anchor Bolt Size	Pole Weight
RSS-4-10-20-BLK-GLV-T2	20 ft	4"	0.128"	9"	8" - 11"	10.5"	3/4"x 30"x 4"	132 lbs
RSS-5-11-20-BLK-GLV-T2	20 ft	5"	0.116"	11.5"	11" - 12"	11"	1"x 36"x 4"	152 lbs
RSS-5-11-22-BLK-GLV-T2	22 ft	5"	0.116"	11.5"	11" - 12"	11"	1"x 36"x 4"	165 lbs

Anchor bolts : JB3044: Set of 4, 3/4"x 30" (included with 4" pole), JB3644: Set of 4, 1"x 36" (included with 5" pole)

Pole Mounting Accessories



Wall mounting
bracket
Bronze
WMB



90° Wall
mounting bracket
Bronze
WMB90



4"/>" Vertical
single tenon
Bronze
PM-SSS-4-VT-S360
PM-SSS-5-VT-S360



4"/>" Horizontal
twin/dual tenon 180°
Bronze
PM-SSS-4-HT-D180
PM-SSS-5-HT-D180



4"/>" Horizontal
twin/dual tenon 90°
Bronze
PM-SSS-4-HT-D090
PM-SSS-5-HT-D090



4"/>" Horizontal
tri tenon 90°
Bronze
PM-SSS-4-HT-T090
PM-SSS-5-HT-T090



4"/>" Horizontal
quad tenon 90°
Bronze
PM-SSS-4-HT-Q090
PM-SSS-5-HT-Q090



Vertical twin
dual tenon
Bronze
PM-SSS-0-VT-D180



Vertical tri tenon 30"
Bronze
PM-SSS-0-VT-T180-30



Vertical tri tenon 54"
Bronze
PM-SSS-0-VT-T180-54

Pole Mounting Accessories



**Vertical quad
tenon
Bronze**
PM-SSS-0-VT-Q090



**Dual bullhorn
tenon 180°
Bronze**
PM-SSS-0-BH-D180



**Tri bullhorn
tenon 180°
Bronze**
PM-SSS-0-BH-T180




**Tri bullhorn
tenon 120°
Bronze**
PM-SSS-0-BH-T120



**Quad bullhorn
tenon 90°
Bronze**
PM-SSS-0-BH-Q090



**Single Round
Horizontal Tenon
Black**
TA1-SINGL-BK-GLV



**180° Twin Round
Horizontal Tenon
Black**
TA1-TW180-BK-GLV



**90° Twin Round
Horizontal Tenon
Black**
TA1-TW90-BK-GLV



**90° Quad Round
Horizontal Tenon
Black**
TA1-QUAD-BK-GLV



Landscape Lighting

By Eran Group

Brilliance with Every Step


Terra's low voltage technology ensures energy efficiency without compromising on performance or design. Transform your landscapes into captivating and enchanting spaces with subtle yet impactful illumination that highlights the beauty of your outdoor environment





3-TIER PATH LIGHT

Guides your way through enchanting gardens and captivating pathways.



- Easy Install
- Rugged metal construction
- Wet Rated
- Radiant halo glow (6 ft. dia)
- Heavy duty metal stake
- Ground mount



Product Details

Light Output: 100 Lumens

Wattage: 4.5 Watts

Efficacy: 23 LPW

Low Voltage: 12-15VAC

IP Rating: IP65

CCT Options: 3000K

CRI Options: 80 CRI

Finish Options: Antique Brass, Black

Lens Type: Clear Polycarbonate Lens

Cord Length: 12" without barrel connector

Dimensions

5.4 in DIA
13.7 cm

14.6 in H
37.1 cm

6.5 in H
16.5 cm



SINGLE TIER PATH LIGHT

Illuminating your pathways with a touch of elegance.



- Easy Install
- Rugged metal construction
- Wet Rated
- Radiant halo glow (6 ft. dia)
- Heavy duty metal stake
- Ground mount



Product Details

Light Output: 100 Lumens

Wattage: 1.6 Watts

Efficacy: 63 LPW

Low Voltage: 12-15VAC

IP Rating: IP65

CCT Options: 3000K

CRI Options: 80 CRI

Finish Options: Antique Brass, Black, Silver

Lens Type: Clear Polycarbonate Lens

Cord Length: 12" without barrel connector

Dimensions

8.2 in DIA
20.8 cm



LED BOLLARD/ PATHWAY LIGHT

Transform your outdoor space into an extraordinary masterpiece.



- Easy Install
- Rugged metal construction
- Wet Rated
- Radiant halo glow (6 ft. dia)
- Heavy duty metal stake
- Ground mount



Product Details

Light Output: 100 Lumens

Wattage: 1.4 Watts

Efficacy: 72 LPW

Low Voltage: 12-15VAC

IP Rating: IP65

CCT Options: 3000K

CRI Options: 80 CRI

Finish Options: Black

Lens Type: Frosted Lens



Cord Length: 12" without barrel connector

Dimensions

2.8 in DIA
7.1 cm

14.1 in H
35.8 cm

6.5 in H
16.5 cm

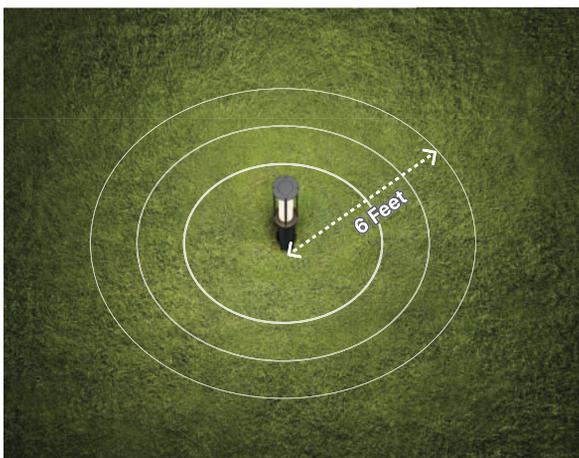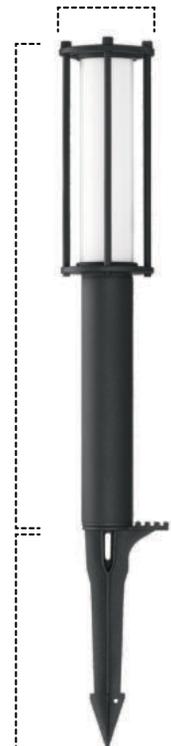

LED CAGED BOLLARD/ PATHWAY LIGHT

Modern design meets enchanting illumination.

LBO-NIBRCL3000K



Antique Brass

LBO-NIBLCL3000K



Black



- Easy Install
- Rugged metal construction
- Wet Rated
- Radiant halo glow (6 ft. dia)
- Heavy duty metal stake
- Ground mount



Product Details

Light Output: 100 Lumens

Wattage: 4.4 Watts

Efficacy: 23 LPW

Low Voltage: 12-15VAC

IP Rating: IP65

CCT Options: 3000K

CRI Options: 80 CRI

Finish Options: Antique Brass, Black

Lens Type: Frosted Lens


Cord Length: 12" without barrel connector

Dimensions

2.8 in DIA
7.1 cm

14.1 in H
35.8 cm

6.5 in H
16.5 cm

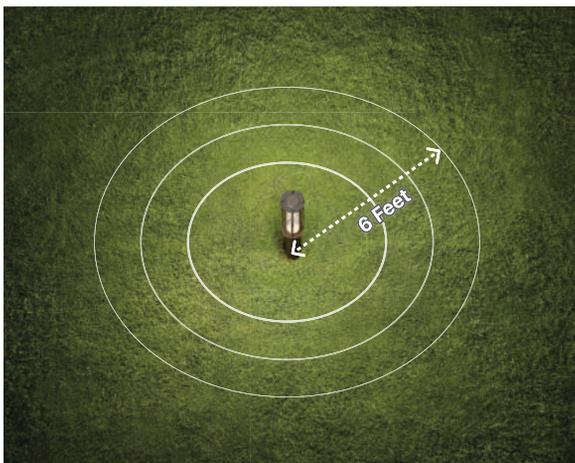

LED MINI BOLLARD/ PATHWAY LIGHT

Unleash a mesmerizing display of elegance where sleek sophistication meets radiant illumination.



-  Easy Install
-  Rugged metal construction
-  Wet Rated
-  Radiant halo glow (6 ft. dia)
-  Heavy duty metal stake
-  Ground mount



Product Details

Light Output: 100 Lumens

Wattage: 1.4 Watts

Efficacy: 72 LPW

Low Voltage: 12-15VAC

IP Rating: IP65

CCT Options: 3000K

CRI Options: 80 CRI

Finish Options: Antique Brass, Black

Lens Type: Frosted Lens


Cord Length: 12" without barrel connector

Dimensions

2.8 in DIA
7.1 cm

10.7 in H
27.2 cm

6.5 in H
16.5 cm

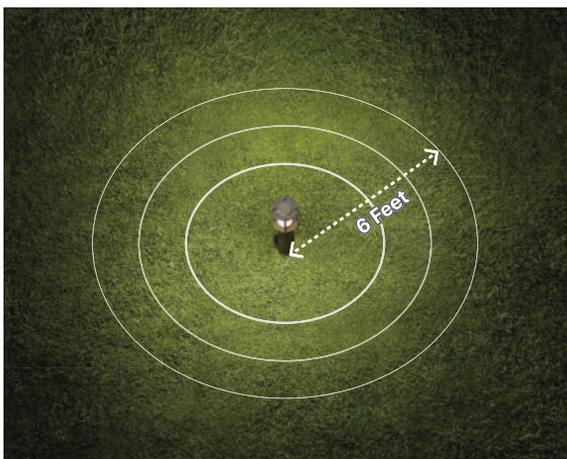

LED BOLLARD /PATHWAY LIGHT

Expertly crafted to enhance your landscape's allure.



- Easy Install
- Rugged metal construction
- Wet Rated
- Radiant halo glow (6 ft. dia)
- Heavy duty metal stake
- Ground mount



Product Details

Light Output: 100 Lumens

Wattage: 2.5 Watts

Efficacy: 40 LPW

Low Voltage: 12-15VAC

IP Rating: IP65

CCT Options: 3000K

CRI Options: 80 CRI

Finish Options: Antique Brass, Black, Silver

Lens Type: Frosted Lens



Cord Length: 12" without barrel connector

Dimensions

2.8 in DIA
7.1 cm

18.2 in H
46.2 cm

6.5 in H
16.5 cm

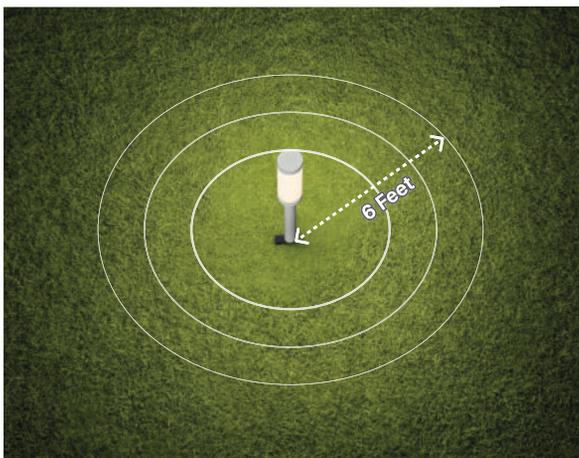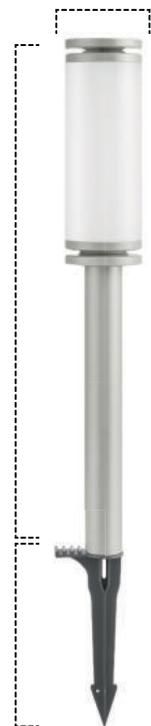

LED RGB BOLLARD /PATHWAY LIGHT

Where colors come alive - a spellbinding aura that turns your outdoor space into a captivating realm of light and wonder.



LBO-NIBL3000K6B



- Easy Install
- Rugged metal construction
- Wet Rated
- Radiant halo glow (6 ft. dia)
- Heavy duty metal stake
- Ground mount



Product Details

Light Output: 100 Lumens

Wattage: 2.5 Watts

Efficacy: 40 LPW

Low Voltage: 12-15VAC

IP Rating: IP65

CCT Options: RGB Color Options, Remote Control (included)

CRI Options: 80 CRI

Finish Options: Black

Lens Type: Clear Polycarbonate Lens



Cord Length: 12" without barrel connector

Dimensions

2.8 in DIA
7.1 cm

18.2 in H
46.2 cm

6.5 in H
16.5 cm

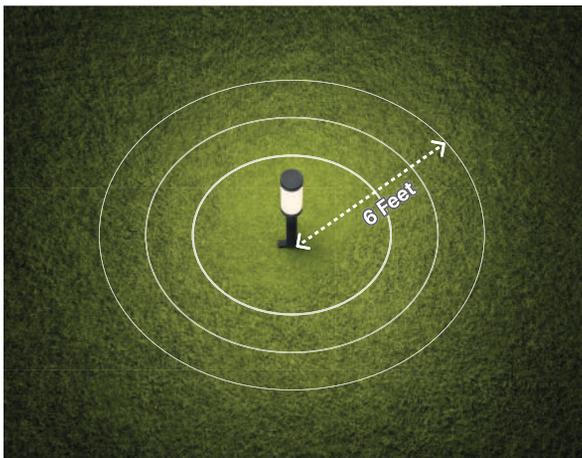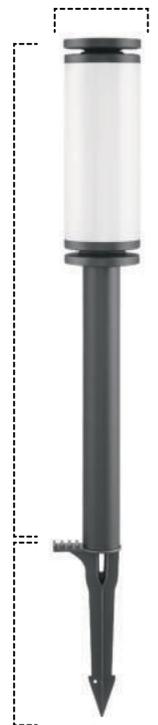

ADJUSTABLE SPOT LIGHT

Effortlessly illuminate your outdoor space with customizable brilliance.

LST-NU4BR3000K



Antique Brass

LST-NU4BL3000K



Black



- Easy Install
- Rugged Metal construction
- Wet Rated
- Ground mount
- Heavy duty metal stake
- Adjustable beam angle (40° (Min.) - 80° (Max.))



Product Details

Light Output: 400 Lumens

Wattage: 3.6 Watts

Efficacy: 111 LPW

Low Voltage: 12-15VAC

IP Rating: IP65

Beam Angle: 40° (Min.) - 80° (Max.)

CCT Options: 3000K

CRI Options: 80 CRI

Finish Options: Antique Brass, Black

Lens Type: Clear Polycarbonate Lens

Cord Length: 12" without barrel connector



Dimensions

5.7 in D
14.5 cm

6.1 in H
15.5 cm

6.4 in H
16.2 cm



ROUND WELL/DECK LIGHT

Light the way forward.



-  Easy Install
-  Rugged Metal construction
-  Wet Rated
-  Focused sideways illumination
-  Durable plastic stake
-  In-ground recessed mount



Product Details

Light Output: 150 Lumens

Wattage: 1.8 Watts

Efficacy: 83 LPW

Low Voltage: 12-15VAC

IP Rating: IP68

CCT Options: 3000K


CRI Options: 80 CRI

Finish Options: Antique Brass, Silver

Cord Length: 48" without barrel connector

Lens Type: Frosted Lens, Silver model comes with 2-Way Lens adapter for focused illumination

Dimensions

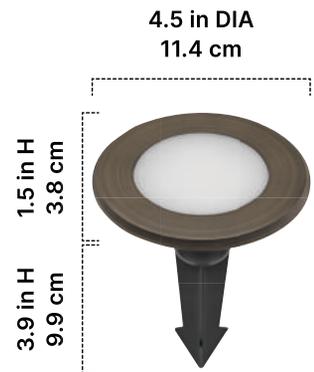

SQUARE WELL/DECK LIGHT

Light the way forward



-  Easy Install
-  Rugged Metal construction
-  Wet Rated
-  Focused sideways illumination
-  Durable plastic stake
-  In-ground recessed mount

Product Details

Light Output: 150 Lumens

Wattage: 1.8 Watts

Efficacy: 83 LPW

Low Voltage: 12-15VAC

IP Rating: IP68

CCT Options: 3000K

CRI Options: 80 CRI

Finish Options: Antique Brass, Silver

Cord Length: 48" without barrel connector


Lens Type: Frosted Lens, Silver model comes with 2-Way Lens adapter for focused illumination

Dimensions



UP/DOWN DECK & STEP LIGHT

Casting a mesmerizing glow that guides your every stride



-  Easy Install
-  Rugged Metal construction
-  Wet Rated
-  Vertical illumination
-  Up/Down Light
-  Wall and Deck mount



Product Details

Light Output: 100 Lumens

Wattage: 3.5 Watts

Efficacy: 29 LPW

Low Voltage: 12-15VAC

IP Rating: IP65

CCT Options: 3000K


CRI Options: 80 CRI

Finish Options: Antique Brass, Black

Lens Type: Clear Polycarbonate Lens

Cord Length: 48" with barrel connector

Dimensions

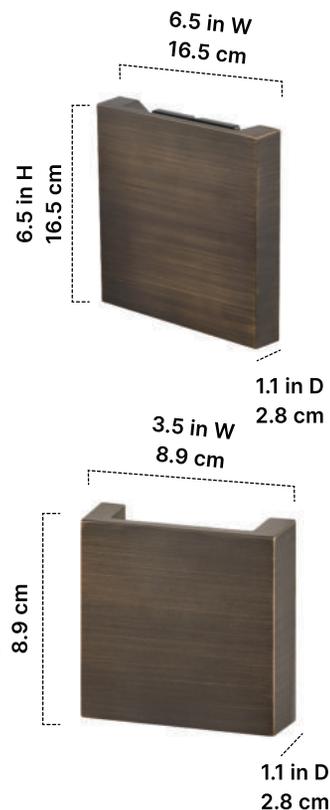

LED UP/DOWN DECK LIGHT

Experience a symphony of beauty and functionality as it elegantly lights your path, ensuring safety and enhancing the overall aesthetic appeal.

		
Nantucket Gray LDS-G1WG3000K	Rocky Harbor Rustic Gray LDS-G1WRH3000K	Heather Pebble Gray LDS-G1WP3000K
	<ul style="list-style-type: none">  Easy Install  Rugged Metal construction  Wet Rated  Vertical illumination  Up/Down Light  Wall and Deck mount 	
Saddle Brown LDS-G1WS3000K		
		
Brazilian Walnut Brown LDS-G1WG3000K		



Product Details

Light Output: 50 Lumens

Wattage: 1.2 Watts

Efficacy: 42 LPW

Low Voltage: 12-15VAC

IP Rating: IP65

CCT Options: 3000K


CRI Options: 80 CRI

Lens Type: Clear Polycarbonate Lens

Cord Length: 48" with barrel connector

Finish Options: Finishes are designed to complement composite wood decking materials.

Dimensions

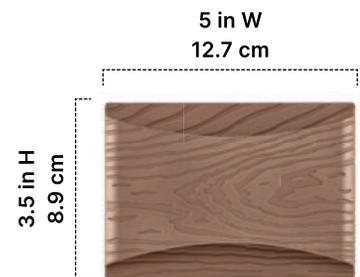

ALTITUDE

Ceiling Fans

By Eran Group

A Breath of Fresh Air

Altitude's designs have been propelled to the forefront of American fan and lighting by an uncompromising devotion to simplicity and utility. By fusing the highest technical sensibilities with the most appropriate material palette, Altitude is able to create unique, timeless designs with the power to transform any environment.



TRITOUR


Adding a refreshing breeze of contemporary elegance to any space with a simple pull.

Tritour 44" | Tritour 52"

Matte White  109LPC44MWHMWH 109LPC52MWHMWH	Matte Black  109LPC44MBKMBK 109LPC52MBKMBK	Brushed Nickel  109LPC44BNSLV 109LPC52BNSLV	Brown wood  109LPC44MBKDB 109LPC52MBKDB
---	---	--	--



-  Easy Install
-  Color Selectable
-  ABS Blades
-  Pull Chain Control
-  AC Motor
-  Indoor Rated

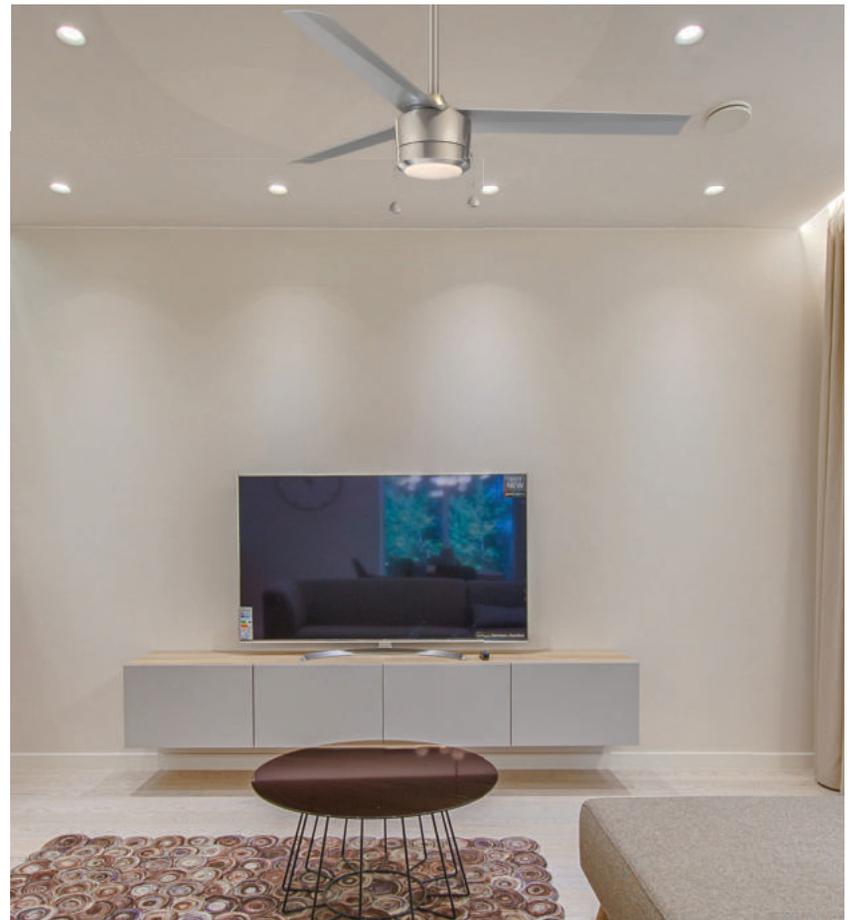

Product Details

Airflow (CFM): 44" : 2986(Hi) - 1596(Lo)
 52" : 4237(Hi) - 2543(Lo)

Fan Control: Pull Chain Control

No. of Speed : 3 Speed

Light Type: Integrated LED

Lumen: 1000

LED Watts: 18W

CRI: 90

CCT: (3000K,4000K,5000K)

Indoor/Outdoor: Indoor Only

Motor Type /Size: AC / 153x12

Fan Size (in.)/Mounting Type: 44", 52" / Downrod, Flat or Angled ceiling (max. 18 degree)

Reversible, Blade Finish: Non-Reversible, Available in Faux Wood (Dark Brown) and Matte Black, Matte White

Lead Wire: 54" (to allow 48-inch downrod sold separately)

Distance from ceiling to bottom of the light kit once installed: 14.58"

Distance from Ceiling to bottom of blade once installed: 9.26"

Ceiling Fan Dimensions

Mounting options		Flat Ceiling*	Slope*(Max.18°)
Fan Blade Length:	Fan Blade Width:	Fan Blade Pitch:	Downrod Included:
44" Fan 21.1 in 52" Fan 25.1 in	44" Fan 4.7 in 52" Fan 4.8 in	12°	6 in
Recommended Room Size: 44" Fan 10ft X 10ft or smaller 52" Fan 12ft X 12ft to 18ft X 18ft			
Recommended Downrod Length per Ceiling Height For maximum comfort, fan should be installed approximately 8 ft from the floor.			
Downrod Length		Ceiling Height	
1.83 m	72 in	16 ft	4.88 m
1.52 m	60 in	15 ft	4.57 m
1.22 m	48 in	14 ft	4.27 m
91.44 cm	36 in	13 ft	3.96 m
60.96 cm	24 in	12 ft	3.66 m
45.72 cm	18 in	11 ft	3.35 m
30.48 cm	12 in	10 ft	3.05 m

Compatible with any unthreaded 0.75 in dia downrod

Application



LARITZA


Tradition meets elegance with a captivating clean and transitional design.

Laritza 56"

Matte White ● 108L56MWHMWH	Matte Black ● 108L56MBKMBK	Brushed Nickel ● 108L56BNDW	Brown wood ● 108L56MBKDB
----------------------------------	----------------------------------	-----------------------------------	--------------------------------



- Easy Install
- Color Selectable
- ABS Blades
- Remote Control
- DC Motor
- Outdoor Rated

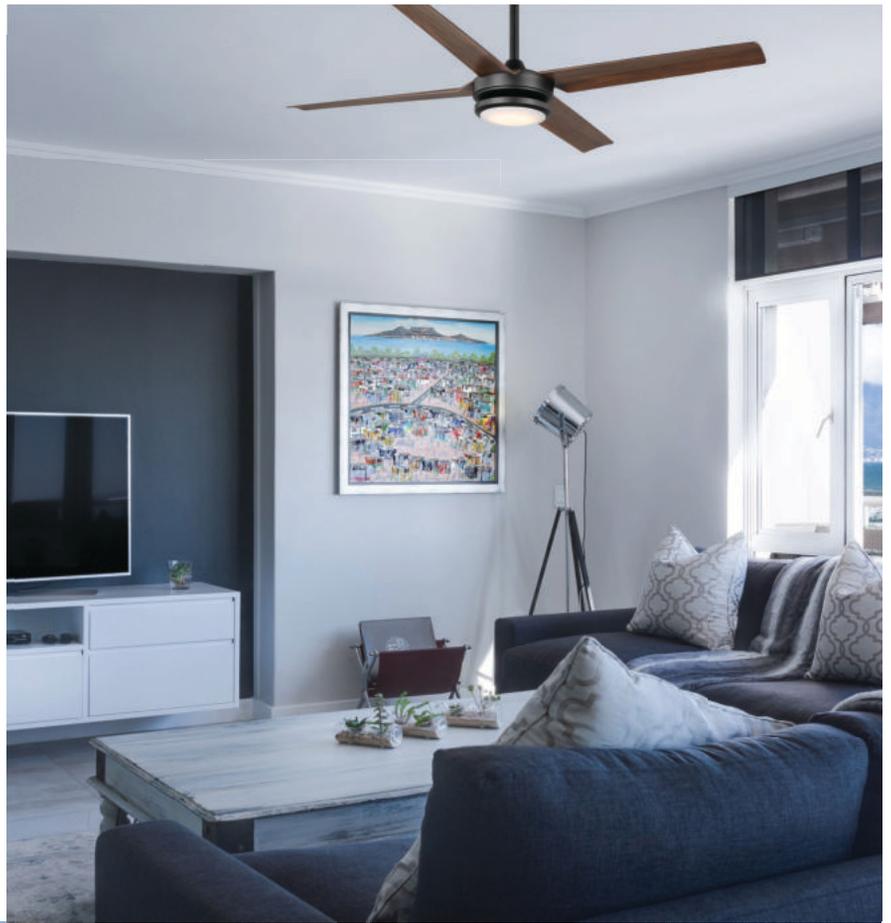

Product Details

Airflow (CFM): 6016(Hi) - 2565(Lo)

Fan Control: Remote Included

No. of Speed : 6 Speed

Light Type: Integrated LED

Lumen: 800

LED Watts: 18W

CRI: 90

CCT: (3000K,4000K,5000K)

Indoor/Outdoor: Indoor / Outdoor (Covered Patio)

Motor Type /Size: DC / 156x8

Fan Size (in.)/Mounting Type: 56"/ Downrod, Flat or Angled ceiling (max. 18 degree)

Reversible, Blade Finish: Non-Reversible, Available in Faux Wood (Dark Brown or Dark Driftwood) and Matte Black and Matte White

Lead Wire: 12" Long with an additional 66" Extension wire to allow 72-inch downrod (sold separately)

Distance from ceiling to bottom of the light kit once installed: 13.03"

Distance from Ceiling to bottom of blade once installed: 10.01"

Ceiling Fan Dimensions

Mounting options	Flat Ceiling*	Slope* (Max.18°)
Fan Blade Length: 56" Fan 25.1 in	Fan Blade Width: 56" Fan 4.8 in	Fan Blade Pitch: 12°
		Downrod Included: 6 in

Recommended Room Size:
56" Fan 20ft X 20ft or larger

Recommended Downrod Length per Ceiling Height

For maximum comfort, fan should be installed approximately 8 ft from the floor.

Downrod Length	Ceiling Height
1.83 m 72 in	16 ft 4.88 m
1.52 m 60 in	15 ft 4.57 m
1.22 m 48 in	14 ft 4.27 m
91.44 cm 36 in	13 ft 3.96 m
60.96 cm 24 in	12 ft 3.66 m
45.72 cm 18 in	11 ft 3.35 m
30.48 cm 12 in	10 ft 3.05 m

Compatible with any unthreaded 0.75 in dia downrod

Application



LARITZA

Tradition meets elegance with a captivating clean and transitional design.

Laritza 56"

Matte White  10856MWH	Matte Black  10856MBK
--	--



-  Easy Install
-  DC Motor
-  ABS Blades
-  Remote Control
-  Outdoor Rated



Product Details

Airflow (CFM): 6016 (Hi) - 2565 (Lo)

Fan Control: Remote Included

No. of Speed : 6 Speed

Indoor/Outdoor: Indoor / Outdoor (Covered Patio)

Motor Type /Size: DC / 156x8 | DC / 156x8

Fan Size (in.)/Mounting Type: 52" / 60" / Downrod, Flat or Angled ceiling (max. 18 degree)

Reversible, Blade Finish: Non-Reversible, Available in Matte Black /Matte White

Lead Wire: 12" Long with an additional 66" Extension wire to allow 72-inch downrod (sold separately)

Distance from ceiling to bottom of the light kit once installed: 11.46"

Distance from Ceiling to bottom of blade once installed: 10.01"

Ceiling Fan Dimensions

Mounting options		Flat Ceiling*	Slope*(Max.18°)
Fan Blade Length: 56" Fan 25.1 in	Fan Blade Width: 56" Fan 4.8 in	Fan Blade Pitch: 12°	Downrod Included: 6 in

Recommended Room Size:
56" Fan 12ft X 12ft to 18ft X 18ft

Recommended Downrod Length per Ceiling Height

For maximum comfort, fan should be installed approximately 8 ft from the floor.

Downrod Length	Ceiling Height
1.83 m / 72 in	16 ft / 4.88 m
1.52 m / 60 in	15 ft / 4.57 m
1.22 m / 48 in	14 ft / 4.27 m
91.44 cm / 36 in	13 ft / 3.96 m
60.96 cm / 24 in	12 ft / 3.66 m
45.72 cm / 18 in	11 ft / 3.35 m
30.48 cm / 12 in	10 ft / 3.05 m

Compatible with any unthreaded 0.75 in dia downrod

Application



BOCA-I


Modern allure and undeniable functionality, a fan favorite among interior designers.

Boca | 52" | Boca | 60"

Matt Black Dark Driftwood  102L52MBKDDW 102L60MBKDDW	Matt Black Dark Brown  102L52MBKDB 102L60MBKDB	Brushed Nickel Dark Driftwood  102L52BNDDW 102L60BNDDW	Brushed Nickel Light Driftwood  102L52BNLDW 102L60BNLDW
---	---	---	--



-  Easy Install
-  Color Selectable
-  ABS Blades
-  Remote Control
-  DC Motor
-  Outdoor Rated

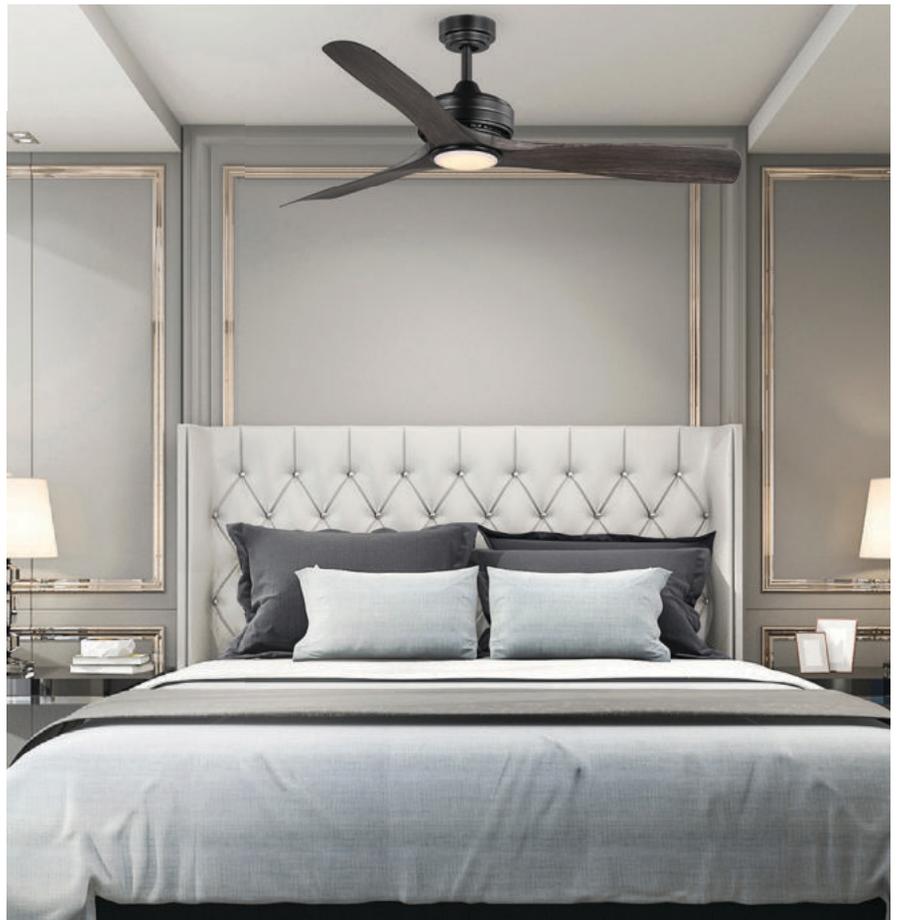

Product Details

Airflow (CFM): 52" : 6411(Hi) - 2527(Lo)
60" : 6837(Hi) - 2740(Lo)

Fan Control: Remote Included

No. of Speed : 6 Speed

Light Type: Integrated LED

Lumen: 800

LED Watts: 18W

CRI: 90

CCT: (3000K,4000K,5000K)

Indoor/Outdoor: Indoor / Outdoor (Covered Patio)

Motor Type /Size: DC / 156x8 | DC / 156x12

Fan Size (in.)/Mounting Type: 52", 60" / Downrod mount only, Flat or Angled ceiling (max. 18 degree)

Reversible, Blade Finish: Non-Reversible, Available in Faux wood finishes

Lead Wire: 12" standard coming from motor with quick connector. Additional 54" extension lead wires with quick connectors included to allow for a 48" downrod (sold separately).

Distance from ceiling to bottom of the light kit once installed: 13.8"

Distance from Ceiling to bottom of blade once installed: 11.08"

Ceiling Fan Dimensions

Mounting options		Flat Ceiling*	Slope*(Max.18°)
Fan Blade Length: 52" Fan 25 in 60" Fan 29 in	Fan Blade Width: 52" Fan 4.9 in 60" Fan 5.9 in	Fan Blade Pitch: 14°	Downrod Included: 6 in
Recommended Room Size: 52" Fan 12ft X 12ft to 18ft X 18ft 60" Fan 20ft X 20ft or larger			
Recommended Downrod Length per Ceiling Height			
For maximum comfort, fan should be installed approximately 8 ft from the floor.			
Downrod Length	Ceiling Height		
1.83 m	72 in	16 ft	4.88 m
1.52 m	60 in	15 ft	4.57 m
1.22 m	48 in	14 ft	4.27 m
91,44 cm	36 in	13 ft	3,96 m
60,96 cm	24 in	12 ft	3,66 m
45,72 cm	18 in	11 ft	3,35 m
30,48 cm	12 in	10 ft	3,05 m

Compatible with any unthreaded 0.75 in dia downrod

Application



GOSSAMER

Featuring a delicate and flowing design that embodies timeless elegance in every room it adorns.

GOSSAMER 52" | GOSSAMER 60"

<p>Matte White</p>  <p>953L52MWH 953L60MWH</p>	<p>Matte Black</p>  <p>953L52MBK 953L60MBK</p>	<p>Brushed Nickel</p>  <p>953L52BNSLV 953L60BNSLV</p>
---	---	--



-  Easy Install
-  Color Selectable
-  ABS Blades
-  Remote Control
-  DC Motor
-  Indoor Rated



Product Details

Airflow (CFM): 52" : 5663(Hi) - 2275(Lo)
60" : 6100(Hi) - 2421(Lo)

Fan Control: Remote Included

No. of Speed : 6 Speed

Light Type: Integrated LED

Lumen: 1000

LED Watts: 18W

CRI: 90

CCT: (3000K,4000K,5000K)

Indoor/Outdoor: Indoor Only

Motor Type /Size: DC / 156x8 | DC / 156x12

Fan Size (in.)/Mounting Type: 52", 60" / Downrod, Flat or Angled ceiling (max. 18 degree)

Reversible, Blade Finish: Non-Reversible, Available in Matte Black /Matte White and Silver Finish

Lead Wire: 12" standard coming from motor with quick connector. Additional 44" extension lead wires with quick connectors included to allow for a 48" downrod (sold separately).

Distance from ceiling to bottom of the light kit once installed: 12.72"


Distance from Ceiling to bottom of blade once installed: 11.08"

Ceiling Fan Dimensions

Mounting options			
	Flat Ceiling*	Slope*(Max.18°)	
Fan Blade Length:	52" Fan 24.9 in	Fan Blade Width:	52" Fan 7.5 in
	60" Fan 28.9 in		60" Fan 7.5 in
		Fan Blade Pitch:	13°
		Downrod Included:	6 in
Recommended Room Size:			
52" Fan 12ft X 12ft to 18ft X 18ft			
60" Fan 20ft X 20ft or larger			
Recommended Downrod Length per Ceiling Height			
For maximum comfort, fan should be installed approximately 8 ft from the floor.			
Downrod Length	Ceiling Height		
1.83 m	72 in	16 ft	4.88 m
1.52 m	60 in	15 ft	4.57 m
1.22 m	48 in	14 ft	4.27 m
91.44 cm	36 in	13 ft	3.96 m
60.96 cm	24 in	12 ft	3.66 m
45.72 cm	18 in	11 ft	3.35 m
30.48 cm	12 in	10 ft	3.05 m

Compatible with any unthreaded 0.75 in dia downrod

Application

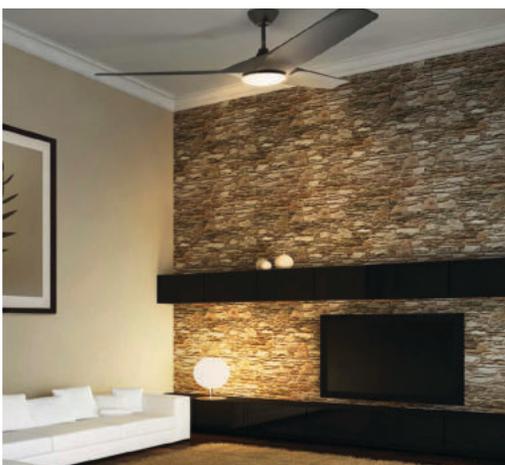

ARLETTE

Pinnacle of style and versatility with exquisite Italian-style, designed for residential and commercial spaces.

Arlette 60"

<p>Matte White</p>  <p>131L60MWH</p>	<p>Matte Black</p>  <p>131L60MBK</p>	<p>Brushed Nickel</p>  <p>131L60BNSLV</p>
---	---	--



-  Easy Install
-  Color Selectable
-  ABS Blades
-  Remote Control
-  DC Motor
-  Outdoor Rated



Product Details

Airflow (CFM): 6382(Hi) - 2505(Li)

Fan Control: Remote Included

No. of Speed : 6 Speed

Light Type: Integrated LED

Lumen: 1200

LED Watts: 24W

CRI: 90

CCT: (3000K,4000K,5000K)

Indoor/Outdoor: Indoor / Outdoor (Covered Patio)

Motor Type /Size: DC / 156x8

Fan Size (in.)/Mounting Type: 60"/ Downrod, Flat or Angled ceiling (max.18 degree)

Reversible, Blade Finish: Non-Reversible, Available in Matte Black, Matte White and Silver

Lead Wire: 12" Long with an additional 66" extension wire to allow 72" downrod (sold separately)

Distance from ceiling to bottom of the light kit once installed: 12.83"

Distance from Ceiling to bottom of blade once installed: 11.78"

Ceiling Fan Dimensions

Mounting options		Flat Ceiling*	Slope*(Max.18°)
Fan Blade Length: 60" Fan 26.69 in	Fan Blade Width: 60" Fan 4.49 in	Fan Blade Pitch: 12°	Downrod Included: 6 in

Recommended Room Size:
60" Fan 20ft X 20ft or larger

Recommended Downrod Length per Ceiling Height

For maximum comfort, fan should be installed approximately 8 ft from the floor.

Downrod Length	Ceiling Height
1.83 m / 72 in	16 ft / 4.88 m
1.52 m / 60 in	15 ft / 4.57 m
1.22 m / 48 in	14 ft / 4.27 m
91.44 cm / 36 in	13 ft / 3.96 m
60.96 cm / 24 in	12 ft / 3.66 m
45.72 cm / 18 in	11 ft / 3.35 m
30.48 cm / 12 in	10 ft / 3.05 m

Compatible with any unthreaded 0.75 in dia downrod

Application



FARMDALE


Adding a touch of contemporary elegance to your small spaces, the sleek and captivating caged fan, effortlessly blends modern aesthetics with a refreshing breeze

Farmdale 24"



Easy Install / 2700K / ABS Blades

Remote Control / AC Motor / Indoor Rated

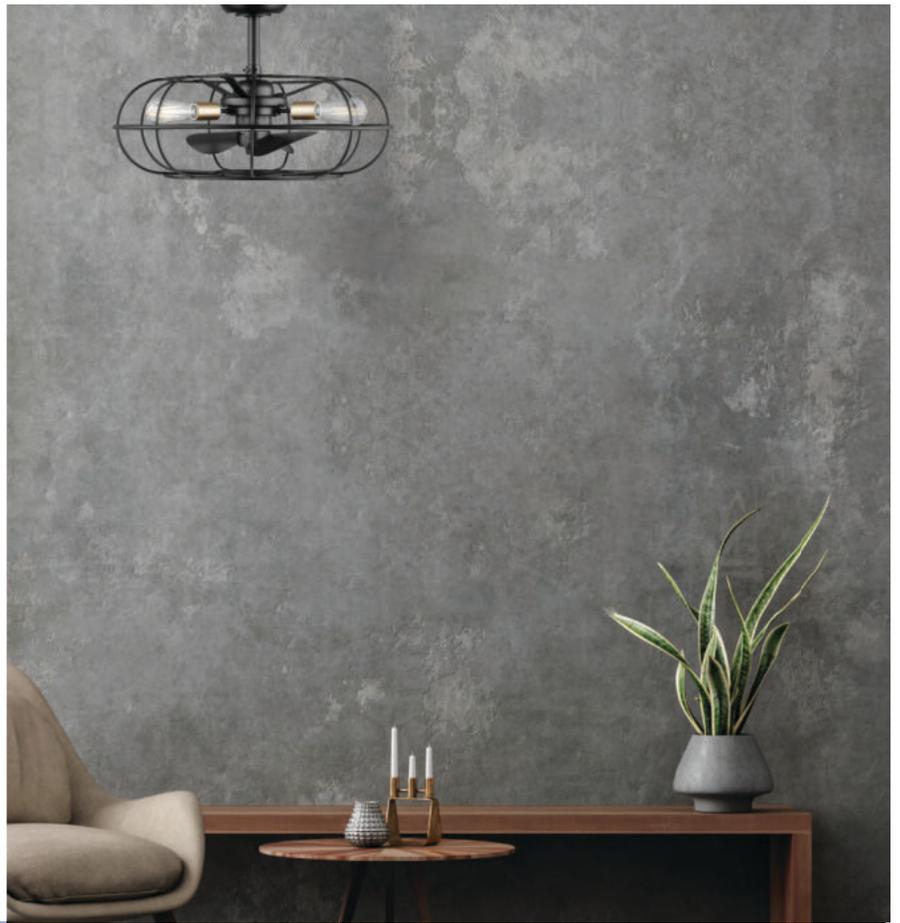

Product Details

Airflow (CFM): 815(Hi) - 625(Lo)

Fan Control: Remote Included

No. of Speed : 3 Speed

Light Type: 3 LED Edison Bulbs

Lumen: 500

LED Watts: 5.5W

CRI: 80

CCT: Soft White 2700K

Indoor/Outdoor: Indoor

Motor Type /Size: AC / 156x8 | AC / 156x12

Fan Size (in.)/Mounting Type: 52", 24", Downrod, Flat or Angled ceiling (max. 18 degree)

Reversible, Blade Finish: Non-Reversible, Available in Matte black finish /Matte white and silver finish

Lead Wire: 12" standard coming from motor with quick connector. Additional 54" extension lead wires with quick connectors included to allow for a 48" downrod (sold separately).

Distance from ceiling to bottom of the light kit once installed: 14.4"

Distance from Ceiling to bottom of blade once installed: 12.9"

Ceiling Fan Dimensions

Mounting options			
Flat Ceiling*		Slope*(Max,18°)	
Fan Blade Length: 24" Fan 4.25 in	Fan Blade Width: 24" Fan 7 in	Fan Blade Pitch: 12°	Downrod Included: 6 in
Recommended Room Size: 24" Fan Small Room			
Recommended Downrod Length per Ceiling Height			
For maximum comfort, fan should be installed approximately 8 ft from the floor.			
Downrod Length			Ceiling Height
1.83 m	72 in		16 ft 4.88 m
1.52 m	60 in		15 ft 4.57 m
1.22 m	48 in		14 ft 4.27 m
91,44 cm	36 in		13 ft 3.96 m
60,96 cm	24 in		12 ft 3.66 m
45,72 cm	18 in		11 ft 3.35 m
30,48 cm	12 in		10 ft 3.05 m

Compatible with any unthreaded 0,75 in dia downrod

Application



HELIUM

Transform smaller indoor spaces into havens of whisper-silent comfort and style.

Helium 24"



Easy Install / 3000K / ABS Blades

Remote Control / AC Motor / Indoor Rated



Product Details

Airflow (CFM): 1471(Hi) - 1016(Lo)

Fan Control: Remote Included

No. of Speed : 3 Speed

Light Type: Integrated LED

Lumen: 1959

LED Watts: 24W

CRI: 80

CCT: Soft White 3000K

Indoor/Outdoor: Indoor

Motor Type : AC

Fan Size (in.)/Mounting Type: 24", Downrod, Flat or Angled ceiling (max. 18 degree)

Reversible, Blade Finish: Non-Reversible, Available in Brushed Nickel and Matte White

Lead Wire: 12" standard coming from motor with quick connector. Additional 54" extension lead wires with quick connectors included to allow for a 48" downrod (sold separately).

Distance from ceiling to bottom of the light kit once installed: 15"

Distance from Ceiling to bottom of blade once installed: 14"

Ceiling Fan Dimensions

Mounting options		Flat Ceiling*	Slope* (Max.18°)
Fan Blade Length: 24" Fan 14 in	Fan Blade Width: 24" Fan 7.75 in	Fan Blade Pitch: 13.5°	Downrod Included: 6 in
Recommended Room Size: 24" Fan Small room			

Recommended Downrod Length per Ceiling Height

For maximum comfort, fan should be installed approximately 8 ft from the floor.

Downrod Length	Ceiling Height
1,83 m / 72 in	16 ft / 4,88 m
1,52 m / 60 in	15 ft / 4,57 m
1,22 m / 48 in	14 ft / 4,27 m
91,44 cm / 36 in	13 ft / 3,96 m
60,96 cm / 24 in	12 ft / 3,66 m
45,72 cm / 18 in	11 ft / 3,35 m
30,48 cm / 12 in	10 ft / 3,05 m

Compatible with any unthreaded 0,75 in dia downrod

Application



MACEDONIA

Pinnacle of modern design and ultimate comfort in smaller living spaces for all-seasons bliss.

Macedonia 18"

Galvanized Antique White

ERTW2008603AWHGV



Easy Install / 2700K / ABS Blades

Remote Control / AC Motor / Indoor Rated



Product Details

Airflow (CFM): 952(Hi) - 677(Lo)

Fan Coontrol: Remote Included

No. of Speed : 3 Speed

Light Type: 4 LED Edison Bulb

Lumen: 500

LED Watts: 5.5W

CRI: 80

CCT: Soft White 2700K

Indoor/Outdoor: Indoor

Motor Type : AC

Fan Size (in.)/Mounting Type: 18", Downrod, Flat or Angled ceiling (max. 18 degree)

Reversible, Blade Finish: Non-Reversible, Available in Silver finish

Lead Wire: 12" standard coming from motor with quick connector. Additional 54" extension lead wires with quick connectors included to allow for a 48" downrod (sold separately).

Distance from ceiling to bottom of the light kit once installed: 14.4"

Distance from Ceiling to bottom of blade once installed: 12.9"

Ceiling Fan Dimensions

Mounting options		Flat Ceiling*	Slope*(Max,18°)
Fan Blade Length: 18" Fan 4.25 in	Fan Blade Width: 18" Fan 7 in	Fan Blade Pitch: 12°	Downrod Included: 8 in
Recommended Room Size: 18" Fan: Small Room			
Recommended Downrod Length per Ceiling Height			
For maximum comfort, fan should be installed approximately 8 ft from the floor.			
Downrod Length	Ceiling Height		
1.83 m	72 in	16 ft	4.88 m
1.52 m	60 in	15 ft	4.57 m
1.22 m	48 in	14 ft	4.27 m
91,44 cm	36 in	13 ft	3.96 m
60,96 cm	24 in	12 ft	3.66 m
45,72 cm	18 in	11 ft	3.35 m
30,48 cm	12 in	10 ft	3.05 m

Compatible with any unthreaded 0.75 in dia downrod

Application



NEW Collections

Coming Soon



Dragonfly

Patent Pending

56 inch
Indoor
2700K - 6500K

- Matte Black Champagne Bronze
- Matte Black



Arlo

Patent Pending

52 inch
Indoor
2700K - 6500K

- Natural Rattan Matte Black



Skylark

Patent Pending

52 inch
Indoor/Outdoor
2700K - 6500K

- Matte Black
- Matte White



Gossamer II

Patent Pending

52 & 60 inch
Indoor
2700K - 6500K

- Matte Black



Sienna Canyon

Patent Pending

52 inch
Indoor/Outdoor
2700K - 6500K

- Matte Black Dark Brown



Boca II

Patent Pending

52 inch
Indoor/Outdoor
2700K - 6500K

- Dark Brown
- Dark Driftwood



Moxy

Patent Pending

52 inch
Indoor/Outdoor
2700K - 6500K

- Matte Black



Banyan

Patent Pending

52 inch
Indoor/Outdoor
2700K - 6500K

- Natural Rattan Dark Brown



Sakai

Patent Pending

56 inch
Indoor/Outdoor
2700K - 6500K

- Champagne Bronze



Cirrus

Patent Pending

52 inch
Indoor
2700K - 6500K

- Matte Black



Mighty Condor

Patent Pending

60 inch
Indoor/Outdoor
2700K - 6500K

- Matte Black Dark Brown



Maya

Patent Pending

52 inch
Indoor/Outdoor
2700K - 6500K

- Matte Black



Trinity

Patent Pending

52 inch
Indoor/Outdoor
2700K - 6500K

- Champagne Bronze Dark Brown
- Matte Black




Dragonfly II

Patent Pending

52 inch
Indoor
2700K - 6500K

- Brushed Nickel Matte Black

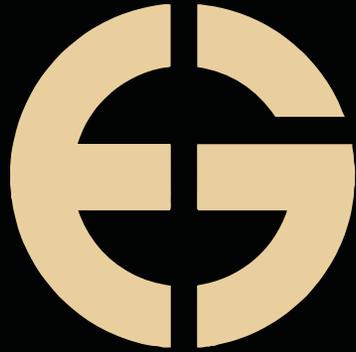

eran group.

(844) 411-5483 | erangroup.com



ALTITUDE