



RP

LIGHTING • FANS

CATALOG VOL. 3

**Over 30 Years
Experience**



**Quality Product
Priced Right**

Apartments, Assisted Living, Dorms Your Multi-Family Specialists



**Value Engineering
Light Commercial**



For over 30 years, RP Lighting + Fans has been a valued supplier of ceiling fans and lighting fixtures to electrical distributors and lighting showrooms. In that time our product offering has grown to encompass all types of lighting fixtures typically installed in multi-family or mixed use facilities, as well as many LED fixtures applicable for light commercial installations.











With our Headquarters located in Albuquerque, NM and several strategically placed warehouses across the country, RP provides fast and efficient delivery to our customers when and where they need it.

RP Lighting + Fans is committed to continuously expanding its catalog of quality products that our customers require. This volume 3.0 catalog presents our latest offering of energy efficient, high quality products priced right.






Sections

	Ceiling Fans.....	6 - 56
	Fans.....	10 - 45
	Light Kits.....	46 - 50
	Controls.....	51
	Specifications.....	52 - 56
	Recessed Lighting.....	58 - 103
	Commercial Recessed.....	62 - 76
	Residential Recessed.....	78 - 96
	Recessed Alternative.....	97 - 102
	Wall / Ceiling Mount.....	104 - 122
	Vanity Lighting.....	124 - 131
	Decorative Suspended.....	132 - 139
	Linear Lighting.....	140 - 149
	Exit & Emergency Lighting.....	150 - 167
	Outdoor Lighting.....	168 - 181
	Step Lighting.....	182 - 184
	Track Lighting.....	186 - 195

Ceiling Fans

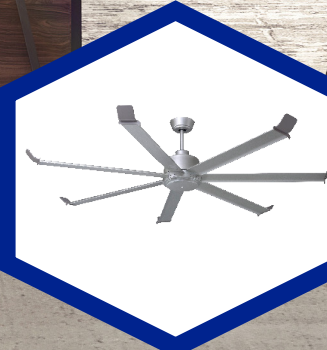

Ceiling Fan Overview

Contemporary Fans



1079LED/1079-E26-L

Contempo

3-Blade 50" Ceiling Fan

Page 10



1078LED/1078-E26-L

Contempo I

3-Blade 50" Ceiling Fan

Page 11



1049LED/1049-E26-L

Contempo II

3-Blade 44" Ceiling Fan

Page 12



1043LED

Contempo IV

3-Blade 52" Ceiling Fan

Page 13



1008LED/1004-E26-L

Europa

4-Blade 50" Ceiling Fan

Page 14



1007LED/1007-E26-L

Europa I

4-Blade 50" Ceiling Fan

Page 15



1041LED/1041-E26-L

Europa II

4-Blade 44" Ceiling Fan

Page 16



1044LED

Europa IV

4-Blade 52" Ceiling Fan

Page 17



1005LED/1005-E26-L

Mirage

5-Blade 50" Ceiling Fan

Page 18



1025LED/1025-E26-L

Mirage I

5-Blade 50" Ceiling Fan

Page 19



1042LED/1042-E26-L

Mirage II

5-Blade 44" Ceiling Fan

Page 20



1045LED

Mirage IV

5-Blade 52" Ceiling Fan

Page 21



1074/1074LED

Aldea II

3-Blade 52" Ceiling Fan

Page 22



1046/1046LED

Aldea III

3-Blade 52" Ceiling Fan

Page 23



1071/1071LED

Aldea

4-Blade 52" Ceiling Fan

Page 24

Specifications and dimensions subject to change.
Lumens are delivered unless otherwise noted.
See website for most current information.

Ceiling Fan Overview

Contemporary Fans (cont.)



1047/1047LED
Aldea IV
4-Blade 52" Ceiling Fan
Page 25



1065/1065LED
Aldea V
5-Blade 52" Ceiling Fan
Page 26



1048/1048LED
Aldea VI
5-Blade 52" Ceiling Fan
Page 27



1021
Sabio
3-Blade 42" Hugger Fan
Page 28



1022
Sabio
3-Blade 52" Hugger Fan
Page 28



1023
Metalis
4-Blade 42" Hugger Fan
Page 29



1024
Metalis
4-Blade 52" Hugger Fan
Page 29



1073/1073LED
Torque
3-Blade 52" Ceiling Fan
Page 30



1072/1072LED
Colibri
3-Blade 60" Ceiling Fan
Page 31

Wet Listed Fans



1067
Aldea VII
3-Blade 52" Ceiling Fan
Page 32



1068
Aldea VIII
4-Blade 52" Ceiling Fan
Page 33



1069
Aldea IX
5-Blade 52" Ceiling Fan
Page 34



1015W
Sunset
5-Blade 52" Ceiling Fan
Page 35



1016W
Sunset II
5-Blade 42" Ceiling Fan
Page 36



Specifications and dimensions subject to change.
Lumens are delivered unless otherwise noted.
See website for most current information.

Ceiling Fan Overview

Industrial Fans



1070W/1080W

Arctic

7-Blade 70" & 80" Ceiling Fan

Page 37



1088/1088LED

Rio Grande

3-Blade 88" Ceiling Fan

Page 38



1091

Industrial Fan

3-Blade 56" Ceiling Fan

Page 39

Traditional Fans



1057-L

Star Light

5-Blade 52" Ceiling Fan

Page 40



1032

Desert Moon

5-Blade 52" Ceiling Fan

Page 41



1052

Royal Star

5-Blade 52" Ceiling Fan

Page 42



1053

Royal Knight

5-Blade 42" Ceiling Fan

Page 43



1054

Royal Knight

5-Blade 30" Ceiling Fan

Page 43



1062-1

Royal Knight Hugger

5-Blade 52" Hugger Fan

Page 44



1063-1

Royal Knight Hugger

5-Blade 42" Hugger Fan

Page 44



1064-1

Royal Knight Hugger

5-Blade 30" Hugger Fan

Page 44



1051

Caribbean

5-Blade 52" Ceiling Fan

Page 45

Warranty Information



Fan Motor



Integrated LED Light Kits



**E26 A19 LED Light Kits
Other Components**

*Specifications and dimensions subject to change.
Lumens are delivered unless otherwise noted.
See website for most current information.*

Contempo



- AC Motor | 3 Speed | Reversible
- 3 Plywood Blades | 12° pitch | 4" Downrod
- Pull Chain Standard
- 50" Sweep | 153 x 15mm
- Remote or Wall Control Optional
- 1079-E26-L: E26 LED Light Kit: 2x9W A19 LED lamps included, 3000K, Dimmable
- 1079LED: Integral LED Light Kit: 16W, 1302 lms (source), 822 lms (delivered), 3000K, 90 CRI, Dimmable



Brushed Nickel Motor /
Brushed Nickel Blades



Brushed Nickel Motor /
Walnut Blades



Black Motor / Black Blades




Oil Rubbed Bronze Motor /
Oil Rubbed Bronze Blades



White Motor / White Blades



Matte Black Motor /
Matte Black Blades

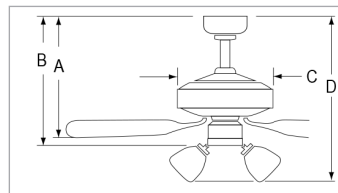

Dimensions

1079LED	1079-E26-L
A: 10-1/4"	A: 10-1/4"
B: -	B: -
C: 10"	C: 10"
D: 15-1/4"	D: 16"

Performance

Model Number	Energy Information at High Speed		Voltage
	Airflow CFM	Power Use Watts	
1079LED 1079-E26-L	5204	57.74	120V

ORDERING GUIDE

Example: 1079LED-BN-BN

Model	Motor / Blade Finish
1079LED- 50" Sweep with integral LED Light Kit	BN-BN Brushed Nickel / Brushed Nickel BN-WT Brushed Nickel / Walnut OB-OB Oil Rubbed Bronze / Oil Rubbed Bronze BK-BK Black / Black MBK-MBK Matte Black / Matte Black WW-WW White / White

Example: 1079BN-BN-E26-L

Model	Motor / Blade Finish	Socket Base	Light Kit
1079 50" Sweep with E26 LED Light Kit	BN-BN Brushed Nickel / Brushed Nickel BN-WT Brushed Nickel / Walnut OB-OB Oil Rubbed Bronze / Oil Rubbed Bronze BK-BK Black / Black MBK-MBK Matte Black / Matte Black WW-WW White / White	-E26 socket base	-L A19 LED Lamps Included

Specifications and dimensions subject to change.
Lumens are delivered unless otherwise noted.
See website for most current information.

Contempo I



- AC Motor | 3 Speed | Reversible
- 3 Plywood Blades | 12 ° Pitch | 4" Downrod
- Pull Chain Standard
- 50" Sweep | 153 x 15mm
- Remote or Wall Control Optional
- 1078-E26-L: E26 LED Light Kit; 2x9W A19 LED lamps included, 3000K, Dimmable
- 1078LED: Integral LED Light Kit: 16W, 1302 lms (source), 822 lms (delivered), 3000K, 90 CRI, Dimmable



Black Motor / Black Blades




Brushed Nickel Motor / Brushed Nickel Blades



Oil Rubbed Bronze Motor / Oil Rubbed Bronze Blades



White Motor / White Blades

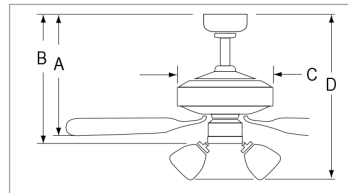

Dimensions

1078LED	1078-E26-L
A: 10-1/2"	A: 10-1/2"
B: -	B: -
C: 10"	C: 10"
D: 15-1/4"	D: 16"

Performance

Model Number	Energy Information at High Speed		Voltage
	Airflow CFM	Power Use Watts	
1078LED 1078-E26-L	5449	57.26	120V

ORDERING GUIDE

Example: 1078LED-BN-BN

Model	Motor / Blade Finish
1078LED-	BN-BN Brushed Nickel / Brushed Nickel
50" Sweep with integral LED Light Kit	OB-OB Oil Rubbed Bronze / Oil Rubbed Bronze
	BK-BK Black / Black
	WW-WW White / White

Example: 1078BN-BN-E26-L

Model	Motor / Blade Finish	Socket Base	Light Kit
1078	BN-BN Brushed Nickel / Brushed Nickel	-E26 socket base	-L A19 LED Lamps Included
50" Sweep with E26 LED Light Kit	OB-OB Oil Rubbed Bronze / Oil Rubbed Bronze		
	BK-BK Black / Black		
	WW-WW White / White		

Specifications and dimensions subject to change.
Lumens are delivered unless otherwise noted.
See website for most current information.

Contempo II



- AC Motor | 3 Speed | Reversible
- 3 Plywood Blades | 12° pitch | 4" Downrod
- Pull Chain Standard
- 44" Sweep | 153 x 15mm
- Remote or Wall Control Optional
- 1049-E26-L: E26 LED Light Kit; 2x9W A19 LED lamps included, 3000K, Dimmable
- 1049LED: Integral LED Light Kit: 16W, 1302 lms (source), 822 lms (delivered), 3000K, 90 CRI, Dimmable



Oil Rubbed Bronze Motor / Oil Rubbed Bronze Blades




Black Motor / Black Blades



Brushed Nickel Motor / Brushed Nickel Blades



White Motor / White Blades



Dimensions
 A: 10-1/4"
 B: -
 C: 10"
 D: 15-1/4"

Performance

Model Number	Energy Information at High Speed		Voltage
	Airflow CFM	Power Use Watts	
1049LED 1049-E26-L	4361	47.71	120V

ORDERING GUIDE

Example: 1049LED-BN-BN

Model	Motor / Blade Finish
1049LED-	BN-BN Brushed Nickel / Brushed Nickel
44" Sweep with integral LED Light Kit	OB-OB Oil Rubbed Bronze / Oil Rubbed Bronze
	BK-BK Black / Black
	WW-WW White / White

Example: 1049BN-BN-E26-L

Model	Motor / Blade Finish	Socket Base	Light Kit
1049	BN-BN Brushed Nickel / Brushed Nickel	-E26 socket base	-L A19 LED Lamps Included
44" Sweep with E26 LED Light Kit	OB-OB Oil Rubbed Bronze / Oil Rubbed Bronze		
	BK-BK Black / Black		
	WW-WW White / White		

Specifications and dimensions subject to change. Lumens are delivered unless otherwise noted. See website for most current information.

Contempo IV



- AC Motor | 3 Speed | Reversible
- 3 Plywood blades | 12° pitch | 4" downrod
- 52" Sweep | 172 x 14mm
- Pull Chain Standard
- Remote or Wall Control Optional
- Integral LED Light Kit: satin white glass, 16W, 1302 lms (source), 822 lms (delivered), 3000K, 90 CRI, dimmable
- Energy Star 4.0 Compliant



Brushed Nickel Motor /
Brushed Nickel Blades




Black Motor / Black Blades



Oil Rubbed Bronze Motor /
Oil Rubbed Bronze Blades



White Motor / White Blades

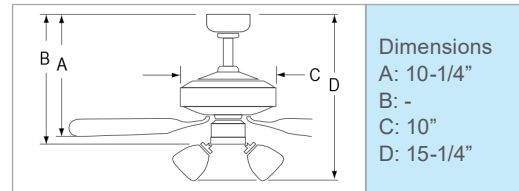

Performance

Model Number	Energy Information at High Speed		Voltage
	Airflow CFM	Power Use Watts	
1043LED	5540	49	120V

ORDERING GUIDE

Example: 1043LED-BN-BN

Model	Motor / Blade Finish
1043LED- 52" Sweep, with Integral LED Light Kit	BN-BN Brushed Nickel / Brushed Nickel OB-OB Oil Rubbed Bronze / Oil Rubbed Bronze BK-BK Black / Black WW-WW White / White

Specifications and dimensions subject to change.
Lumens are delivered unless otherwise noted.
See website for most current information.

Europa



- AC Motor | 3-Speed | Reversible
- 4 Plywood Blades | 12° pitch | 4" downrod
- Pull Chain Standard
- 1004-E26-L: 50" Sweep | 153 x 15mm
- 1008LED: 50" Sweep | 153 x 15mm
- Remote and Wall Control Optional
- 1004-E26-L: E26 LED Light Kit; 2x9W A19 LED lamps included, 3000K, Dimmable
- 1008LED: Integral LED Light Kit: 16W, 1302 lms (source), 822 lms (delivered), 3000K, 90 CRI, Dimmable; JA8/Title 24 Compliant



Brushed Nickel Motor /
Brushed Nickel Blades



Matte Black Motor /
Matte Black Blades



Black Motor / Black Blades




Oil Rubbed Bronze Motor /
Oil Rubbed Bronze Blades



Brushed Nickel Motor /
Walnut Blades



White Motor / White Blades

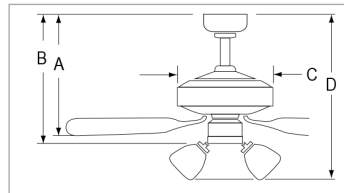

Dimensions	
1004-E26-L	1008LED
A: 10-1/4"	A: 10-1/4"
B: -	B: -
C: 10"	C: 10"
D: 16"	D: 15-1/4"

Performance

Model Number	Energy Information at High Speed		
	Airflow CFM	Power Use Watts	Voltage
1008LED 1004-E26-L	5351	61.96	120V

ORDERING GUIDE

Example: 1008LED-BN-BN

Model	Motor / Blade Finish
1008LED- 50" Sweep with Integral LED Light Kit	BN-BN Brushed Nickel / Brushed Nickel
	BN-WT Brushed Nickel / Walnut
	OB-OB Oil Rubbed Bronze / Oil Rubbed Bronze
	BK-BK Black / Black
	MBK-MBK Matte Black / Matte Black
	WW-WW White / White

Example: 1004BN-BN-E26-L

Model	Motor / Blade Finish	Socket Base	Light Kit
1004 50" Sweep with E26 LED Light Kit	BN-BN Brushed Nickel / Brushed Nickel	-E26 socket base	-L A19 LED Lamps Included
	BN-WT Brushed Nickel / Walnut		
	OB-OB Oil Rubbed Bronze / Oil Rubbed Bronze		
	BK-BK Black / Black		
	MBK-MBK Matte Black / Matte Black		
	WW-WW White / White		

Specifications and dimensions subject to change.
Lumens are delivered unless otherwise noted.
See website for most current information.

Europa I



1007-E26



Intertek



Fan Motor

- AC Motor | 3-Speed | Reversible
- 4 Curved Plywood Blades | 12° pitch | 4" downrod
- Pull Chain Standard
- 50" Sweep | 153 x 15mm
- Remote or Wall Control Optional
- 1007-E26-L: E26 LED Light Kit: 2x9W A19 LED lamps included, 3000K, Dimmable
- 1007LED: Integral LED Light Kit: 16W, 1302 lms (source), 822 lms (delivered), 3000K, 90 CRI, Dimmable



Oil Rubbed Bronze Finish / Oil Rubbed Bronze Blades




Black Motor / Black Blades



Brushed Nickel Motor / Brushed Nickel Blades



White Motor / White Blades

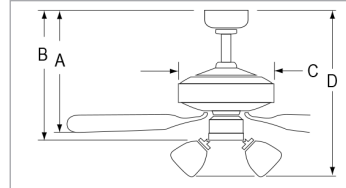

Dimensions

1007LED	1007-E26-L
A: 10-1/2"	A: 10-1/2"
B: -	B: -
C: 10"	C: 10"
D: 15-1/4"	D: 16"

Performance

Model Number	Energy Information at High Speed		Voltage
	Airflow CFM	Power Use Watts	
1007LED 1007-E26-L	5300	58.66	120V

ORDERING GUIDE

Example: 1007LED-BN-BN

Model	Motor / Blade Finish
1007LED- 50" Sweep with Integral LED Light Kit	BN-BN Brushed Nickel / Brushed Nickel OB-OB Oil Rubbed Bronze / Oil Rubbed Bronze BK-BK Black / Black

Example: 1007BN-BN-E26-L

Model	Motor / Blade Finish	Socket Base	Light Kit
1007 50" Sweep with E26 LED Light Kit	BN-BN Brushed Nickel / Brushed Nickel OB-OB Oil Rubbed Bronze / Oil Rubbed Bronze BK-BK Black / Black WW-WW White / White	-E26 socket base	-L A19 LED Lamps Included

Specifications and dimensions subject to change.
Lumens are delivered unless otherwise noted.
See website for most current information.

Europa II



- AC Motor | 3-Speed | Reversible
- 4 Plywood Blades | 12° pitch | 4" downrod
- Pull Chain Standard
- 44" Sweep | 153 x 15mm
- Remote or Wall Control Optional
- 1041-E26-L: E26 LED Light Kit: 2x9W A19 LED lamps included, 3000K, Dimmable
- 1041LED: Integral LED Light Kit: 16W, 1302 lms (source), 822 lms (delivered), 3000K, 90 CRI, Dimmable



White Motor / White Blades




Black Motor / Black Blades



Brushed Nickel Motor / Brushed Nickel Blades



Oil Rubbed Bronze Motor / Oil Rubbed Bronze Blades



Dimensions
 A: 10-1/4"
 B: -
 C: 10"
 D: 15-1/4"

Performance

Model Number	Energy Information at High Speed		Voltage
	Airflow CFM	Power Use Watts	
1041LED 1041-E26-L	4255	49.48	120V

ORDERING GUIDE

Example: 1041LED-BN-BN

Model	Motor / Blade Finish
1041LED-	BN-BN Brushed Nickel / Brushed Nickel
44" Sweep with Integral LED Light Kit	BK-BK Black / Black
	OB-OB Oil Rubbed Bronze / Oil Rubbed Bronze
	WW-WW White / White

Example: 1041BN-BN-E26-L

Model	Motor / Blade Finish	Socket Base	Light Kit
1041	BN-BN Brushed Nickel / Brushed Nickel	-E26 socket base	-L A19 LED Lamps Included
44" Sweep with E26 LED Light Kit	BK-BK Black / Black		
	OB-OB Oil Rubbed Bronze / Oil Rubbed Bronze		
	WW-WW White / White		

Specifications and dimensions subject to change. Lumens are delivered unless otherwise noted. See website for most current information.

Europa IV



- AC Motor | 3-Speed | Reversible
- 4 Plywood Blades | 12° pitch | 4" downrod
- Pull Chain Standard
- 52" Sweep | 172 x 14mm
- Remote or Wall Control Optional
- Energy Star 4.0 Listed
- Integral LED Light Kit: 16W, 1302 lms (source), 822 lms (delivered), 3000K, 90 CRI, Dimmable



Brushed Nickel Motor /
Brushed Nickel Blades




White Motor / White Blades



Black Motor / Black Blades



Oil Rubbed Bronze Motor /
Oil Rubbed Bronze Blades

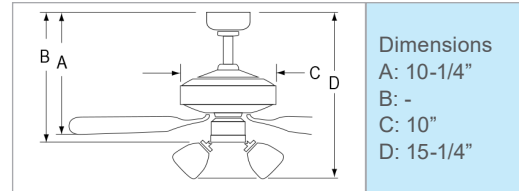

Performance

Model Number	Energy Information at High Speed		Voltage
	Airflow CFM	Power Use Watts	
1044LED	5454	49.21	120V

ORDERING GUIDE

Example: **1044LED-BN-BN**

Model	Motor / Blade Finish
1044LED-	BN-BN Brushed Nickel / Brushed Nickel
52" Sweep, AC Motor, Pull Chain, with Integral LED Light Kit	BK-BK Black / Black
	OB-OB Oil Rubbed Bronze / Oil Rubbed Bronze
	WW-WW White / White

Specifications and dimensions subject to change.
Lumens are delivered unless otherwise noted.
See website for most current information.

Mirage



- AC Motor | 3-Speed | Reversible
- 5 Plywood Blades | 12° pitch | 4" downrod
- Pull Chain Standard
- Remote Control Optional
- 50" Sweep | 153 x 15mm
- 1005-E26-L: E26 LED Light Kit: 2x9W A19 LED lamps included, 3000K, Dimmable
- 1005LED: Integral LED Light Kit: 16W, 1302 lms (source), 822 lms (delivered), 3000K, 90 CRI, Dimmable



Brushed Nickel Motor /
Brushed Nickel Blades



Matte Black Motor /
Matte Black Blades



Black Motor / Black Blades




Oil Rubbed Bronze Motor /
Oil Rubbed Bronze Blades



White Motor / White Blades



Brushed Nickel Motor /
Walnut Blades

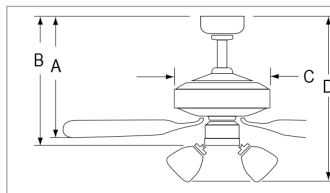

Dimensions	
1005LED	1005-E26-L
A: 10-1/4"	A: 10-1/4"
B: -	B: -
C: 10"	C: 10"
D: 15-1/4"	D: 16"

Performance

Model Number	Energy Information at High Speed		Voltage
	Airflow CFM	Power Use Watts	
1005LED 1005-E26-L	5149	59.6	120V

ORDERING GUIDE

Example: 1005LED-BN-BN

Model	Motor / Blade Finish
1005LED- 50" Sweep with integral LED Light Kit	BN-BN Brushed Nickel / Brushed Nickel
	BN-WT Brushed Nickel / Walnut
	OB-OB Oil Rubbed Bronze / Oil Rubbed Bronze
	BK-BK Black / Black
	MBK-MBK Matte Black / Matte Black
	WW-WW White / White

Example: 1005BN-BN-E26-L

Model	Motor / Blade Finish	Socket Base	Light Kit
1005 50" Sweep with E26 LED Light Kit	BN-BN Brushed Nickel / Brushed Nickel	-E26 socket base	-L A19 LED Lamps Included
	BN-WT Brushed Nickel / Walnut		
	OB-OB Oil Rubbed Bronze / Oil Rubbed Bronze		
	BK-BK Black / Black		
	MBK-MBK Matte Black / Matte Black		
	WW-WW White / White		

Specifications and dimensions subject to change.
Lumens are delivered unless otherwise noted.
See website for most current information.

Mirage I



- AC Motor | 3-Speed | Reversible
- 5 Curved Plywood Blades | 12° pitch | 4" downrod
- Pull Chain Standard
- Remote or Wall Control Optional
- 50" Sweep | 153 x 15mm
- 1025-E26-L: E26 LED Light Kit: 2x9W A19 LED lamps included, 3000K, Dimmable
- 1025LED: Integral LED Light Kit: 16W, 1302 lms (source), 822 lms (delivered), 3000K, 90 CRI, Dimmable



Brushed Nickel Motor /
Brushed Nickel Blades




Black Motor / Black Blades



Oil Rubbed Bronze Motor /
Oil Rubbed Bronze Blades



White Motor / White Blades

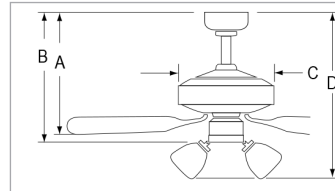

Dimensions

1025LED	1025-E26-L
A: 10-1/2"	A: 10-1/2"
B: -	B: -
C: 10"	C: 10"
D: 15-1/4"	D: 16"

Performance

Model Number	Energy Information at High Speed		Voltage
	Airflow CFM	Power Use Watts	
1025LED 1025-E26-L	5246	59.23	120V

ORDERING GUIDE

Example: 1025LED-BN-BN

Model	Motor / Blade Finish
1025LED- 50" Sweep with integral LED Light Kit	BN-BN Brushed Nickel / Brushed Nickel BK-BK Black / Black OB-OB Oil Rubbed Bronze / Oil Rubbed Bronze WW-WW White / White

Example: 1025BN-BN-E26-L

Model	Motor / Blade Finish	Socket Base	Light Kit
1025 50" Sweep with E26 LED Light Kit	BN-BN Brushed Nickel / Brushed Nickel OB-OB Oil Rubbed Bronze / Oil Rubbed Bronze WW-WW White / White	-E26 socket base	-L A19 LED Lamps Included

Specifications and dimensions subject to change.
Lumens are delivered unless otherwise noted.
See website for most current information.

Mirage II



- AC Motor | 3-Speed | Reversible
- 5 Plywood Blades | 12° pitch | 4" downrod
- Pull Chain Standard
- Remote or Wall Control Optional
- 44" Sweep | 153 x 12mm
- 1042-E26-L: E26 LED Light Kit: 2x9W A19 LED lamps included, 3000K, Dimmable
- 1042LED: Integral LED Light Kit: 16W, 1302 lms (source), 822 lms (delivered), 3000K, 90 CRI, Dimmable



Oil Rubbed Bronze Motor / Oil Rubbed Bronze Blades




Brushed Nickel Motor / Walnut Blades



Brushed Nickel Motor / Brushed Nickel Blades



White Motor / White Blades

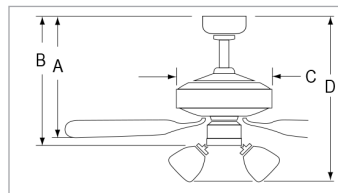

Dimensions
 A: 10-1/4"
 B: -
 C: 10"
 D: 15-1/4"

Performance

Model Number	Energy Information at High Speed		Voltage
	Airflow CFM	Power Use Watts	
1042LED 1042-E26-L	4020	48.63	120V

ORDERING GUIDE

Example: 1042LED-BN-WT

Model	Motor / Blade Finish
1042LED-	BN-BN Brushed Nickel / Brushed Nickel
44" Sweep with integral LED Light Kit	BN-WT Brushed Nickel / Walnut
	OB-OB Oil Rubbed Bronze / Oil Rubbed Bronze
	WW-WW White / White

Example: 1042BN-WT-E26-L

Model	Motor / Blade Finish	Socket Base	Light Kit
1042	BN-BN Brushed Nickel / Brushed Nickel	-E26 socket base	-L A19 LED Lamps Included
44" Sweep with E26 LED Light Kit	BN-WT Brushed Nickel / Walnut		
	OB-OB Oil Rubbed Bronze / Oil Rubbed Bronze		
	WW-WW White / White		

Specifications and dimensions subject to change. Lumens are delivered unless otherwise noted. See website for most current information.

Mirage IV



- AC Motor | 3-Speed | Reversible
- 52" Sweep | 172 x 14mm
- Energy Star 4.0 Listed
- 5 Plywood Blades | 12° pitch |
- Remote or Wall Control Optional
- Integral LED Light Kit: 16W, 1302 lms (source), 822 lms (delivered), 3000K, 90 CRI, Dimmable
- Pull Chain Standard



Brushed Nickel Motor /
Brushed Nickel Blades




Black Motor / Black Blades



Oil Rubbed Bronze Motor /
Oil Rubbed Bronze Blades



White Motor / White Blades

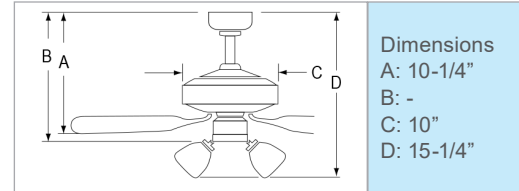

Performance

Model Number	Energy Information at High Speed		Voltage
	Airflow CFM	Power Use Watts	
1045LED	5224	50.16	120V

ORDERING GUIDE

Example: 1045LED-BN-BN

Model	Motor / Blade Finish
1045LED- 52" Sweep, with Integral LED Light Kit	BN-BN Brushed Nickel / Brushed Nickel
	BK-BK Black / Black
	OB-OB Oil Rubbed Bronze / Oil Rubbed Bronze
	WW-WW White / White

Specifications and dimensions subject to change.
Lumens are delivered unless otherwise noted.
See website for most current information.

Aldea II



- AC Motor | 3-Speed | Reversible
- 3 MDF Blades | 11° pitch | 4" downrod
- Pull Chain Standard
- 52" Sweep | 153 x 12mm
- Remote or Wall Control Optional
- 1074: Light Kit Adaptable
- 1074LED: Integral LED Light Kit: 16 W, 1251 lms (sourced), 983 lms (delivered), 3000K, 90 CRI, Dimmable



1074 Brushed Nickel Motor /
Brushed Nickel Blades

1074LED



Oil Rubbed Bronze Motor /
Walnut Blades

1074



Oil Rubbed Bronze Motor /
Walnut Blades



Brushed Nickel Motor /
Brushed Nickel Blades



Brushed Nickel Motor /
Walnut Blades



Brushed Nickel Motor /
Walnut Blades



White Motor /
White Blades




White Motor /
White Blades



Matte Black Motor /
Matte Black Blades



Matte Black Motor /
Matte Black Blades

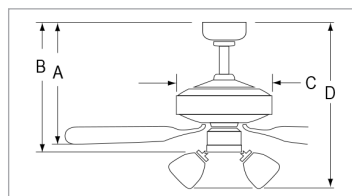

Dimensions

1074	1074LED
A: 9-3/4"	A: 9-3/4"
B: 12-1/4"	B: 13"
C: 6-7/8"	C: 6-7/8"
D: -	D: -

Performance

Model Number	Energy Information at High Speed		Voltage
	Airflow CFM	Power Use Watts	
1074	5062	57.38	120V
1074LED	5062	57.45	

ORDERING GUIDE

Example: 1074BN-BN or 1074LED-BN-BN

Model	Motor / Blade Finish
1074	
52" Sweep, Pull Chain Light Kit Adaptable	BN-BN Brushed Nickel / Brushed Nickel
	BN-WT Brushed Nickel / Walnut
	MBK-MBK Matte Black / Matte Black
	OB-WT Oil Rubbed Bronze / Walnut
	WW-WW White / White
1074LED-	
52" Sweep, Pull Chain Integrated Light Kit	

Specifications and dimensions subject to change.
Lumens are delivered unless otherwise noted.
See website for most current information.

Aldea III



1046

1046LED

Intertek

Fan Motor

- AC Motor | 3-Speed | Reversible
- 3 MDF Blades | 11° pitch | 4" downrod
- Pull Chain Standard
- 52" Sweep | 172 x 14mm
- Remote or Wall Control Optional
- 1046: Light Kit Adaptable
- 1046LED: Integral LED Light Kit: 16W, 1251 lms (sourced), 983 lms (delivered), 3000K, 90 CRI, Dimmable



1046



Oil Rubbed Bronze Motor / Walnut Blades

1046LED Oil Rubbed Bronze Motor / Walnut Blades


1046LED



Brushed Nickel Motor / Brushed Nickel Blades



Brushed Nickel Motor / Brushed Nickel Blades

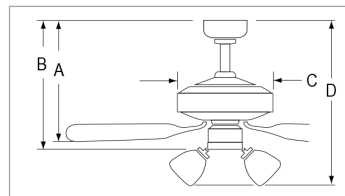

Dimensions

1046	1046LED
A: 9-3/4"	A: 9-3/4"
B: 12-1/4"	B: 12-1/4"
C: 7-5/8"	C: -
D: -	D: 13"



Brushed Nickel Motor / Walnut Blades



Brushed Nickel Motor / Walnut Blades



White Motor / White Blades



White Motor / White Blades

Performance

Model Number	Energy Information at High Speed		Voltage
	Airflow CFM	Power Use Watts	
1046	5538	50	120V
1046LED	5531	50.22	

ORDERING GUIDE

Example: 1046BN-BN or 1046LED-BN-BN

Model	Motor / Blade Finish
1046 52" Sweep, Pull Chain Light Kit Adaptable	BN-BN Brushed Nickel / Brushed Nickel BN-WT Brushed Nickel / Walnut OB-WT Oil Rubbed Bronze / Walnut WW-WW White / White
1046LED- 52" Sweep, Pull Chain Integrated Light Kit	

Specifications and dimensions subject to change.
Lumens are delivered unless otherwise noted.
See website for most current information.

Aldea



1071

Intertek

Fan Motor

- AC Motor | 3-Speed | Reversible
- 4 MDF Blades | 11° pitch | 4" downrod
- Pull Chain Standard
- 52" Sweep | 153 x 12mm
- Remote or Wall Control Optional
- Light Kit Adaptable
- 1071LED: Integral LED Light Kit: 15W, 1251 lms (sourced), 983 lms (delivered), 3000K, 90 CRI, Dimmable
- 1071: Title 20 Compliant



1071LED Brushed Nickel Motor /
Brushed Nickel Blades

1071LED



Oil Rubbed Bronze Motor / Walnut Blades



Brushed Nickel Motor / Brushed Nickel Blades



Brushed Nickel Motor / Walnut Blades



White Motor / White Blades



Matte Black Motor / Matte Black Blades

1071



Oil Rubbed Bronze Motor / Walnut Blades




Brushed Nickel Motor / Walnut Blades



White Motor / White Blades



Matte Black Motor / Matte Black Blades

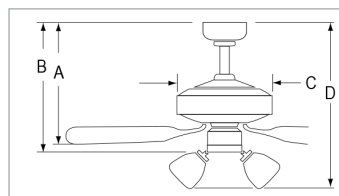

Dimensions

1071	1071LED
A: 9-3/4"	A: 9-3/4"
B: 12-1/4"	B: 13"
C: 6-7/8"	C: 6-7/8"
D: -	D: -

Performance

Model Number	Energy Information at High Speed		Voltage
	Airflow CFM	Power Use Watts	
1071	4899	57	120V
1071LED	4945	57.63	

ORDERING GUIDE

Example: 1071BN-BN

Model	Motor / Blade Finish
1071 52" Sweep, Pull Chain	BN-BN Brushed Nickel / Brushed Nickel BN-WT Brushed Nickel / Walnut MBK-MBK Matte Black OB-WT Oil Rubbed Bronze / Walnut WW-WW White / White
1071LED- 52" Sweep, Pull Chain Integrated Light Kit	

Specifications and dimensions subject to change.
Lumens are delivered unless otherwise noted.
See website for most current information.

Aldea IV



1047

1047LED

Intertek

Fan Motor

- AC Motor | 3-Speed | Reversible
- 4 MDF Blades | 11° pitch | 4" downrod
- Pull Chain Standard
- 52" Sweep | 172 x 14mm
- Remote or Wall Control Optional
- 1047LED: Integral LED Light Kit: 15W, 1251 lms (sourced), 983 lms (delivered), 3000K, 90 CRI, Dimmable




1047LED: Brushed Nickel Motor / Walnut Blades

1047



Brushed Nickel Motor / Walnut Blades


1047LED



Brushed Nickel Motor / Brushed Nickel Blades



Brushed Nickel Motor / Brushed Nickel Blades

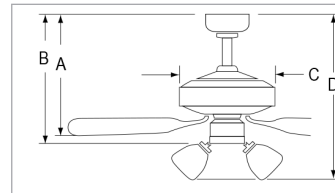

Dimensions

1047	1047LED
A: 9-3/4"	A: 9-3/4"
B: 12-1/4"	B: 12-1/4"
C: 7-5/8"	C: -
D: -	D: 13"



Oil Rubbed Bronze Motor / Walnut Blades



Oil Rubbed Bronze Motor / Walnut Blades



White Motor / White Blades



White Motor / White Blades

Performance

Model Number	Energy Information at High Speed		Voltage
	Airflow CFM	Power Use Watts	
1047	5400	50.4	120V
1047LED	5420	50.5	

ORDERING GUIDE

Example: 1047BN-BN or 1047LED-BN-BN

Model	Motor / Blade Finish
1047 52" Sweep, Pull Chain Light Kit Adaptable	BN-BN Brushed Nickel / Brushed Nickel BN-WT Brushed Nickel / Walnut OB-WT Oil Rubbed Bronze / Walnut WW-WW White / White
1047LED- 52" Sweep, Pull Chain Integrated Light Kit	

Specifications and dimensions subject to change.
Lumens are delivered unless otherwise noted.
See website for most current information.

Aldea V



- AC Motor | 3-Speed | Reversible
- 52" Sweep | 153 x 12mm
- 1065LED: Integral LED Light Kit: 15W, 1251 lms (sourced), 983 lms (delivered), 3000K, 90 CRI, Dimmable
- 5 MDF Blades | 11° pitch | 4" downrod
- Remote or Wall Control Optional
- Pull Chain Standard



1065LED: Brushed Nickel Motor /
Brushed Nickel Blades

1065LED



Brushed Nickel Motor /
Brushed Nickel Blades

1065



Brushed Nickel Motor /
Walnut Blades



Brushed Nickel Motor /
Walnut Blades



Oil Rubbed Bronze Motor /
Walnut Blades




Oil Rubbed Bronze Motor /
Walnut Blades



White Motor / White Blades



White Motor / White Blades

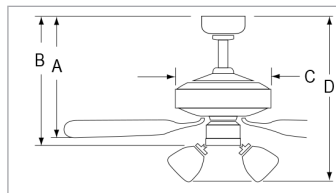

Dimensions

1065	1065LED
A: 9-3/4"	A: 9-3/4"
B: 12-1/4"	B: 12-1/4"
C: 7-5/8"	C: -
D: -	D: 13"

Performance

Model Number	Energy Information at High Speed		Voltage
	Airflow CFM	Power Use Watts	
1065 1065LED	5156	58.64	120V

ORDERING GUIDE

Example: 1065BN-BN or 1065LED-BN-BN

Model	Motor / Blade Finish
1065 52" Sweep, Pull Chain Light Kit Adaptable	BN-BN Brushed Nickel / Brushed Nickel BN-WT Brushed Nickel / Walnut OB-WT Oil Rubbed Bronze / Walnut WW-WW White / White
1065LED- 52" Sweep, Pull Chain Integrated Light Kit	

Specifications and dimensions subject to change.
Lumens are delivered unless otherwise noted.
See website for most current information.

Aldea VI



1048

1048LED

Intertek

Fan Motor

- AC Motor | 3-Speed | Reversible
- 52" Sweep | 172 x 14mm
- 1048LED: Integral LED Light Kit: 15W, 1251 lms (sourced), 983 lms (delivered), 3000K, 90 CRI, Dimmable
- 5 MDF Blades | 11° pitch | 4" downrod
- Remote or Wall Control Optional
- Pull Chain Standard



1048LED: Brushed Nickel Motor / Walnut Blades

1065



Brushed Nickel Motor / Walnut Blades


1065LED



Brushed Nickel Motor / Brushed Nickel Blades



Brushed Nickel Motor / Brushed Nickel Blades

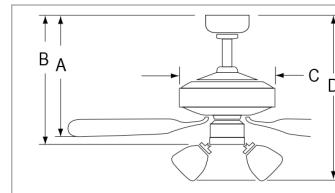

Dimensions

1065	1065LED
A: 9-3/4"	A: 9-3/4"
B: 12-1/4"	B: 12-1/4"
C: 7-5/8"	C: -
D: -	D: 13"



Oil Rubbed Bronze Motor / Walnut Blades



Oil Rubbed Bronze Motor / Walnut Blades



White Motor / White Blades



White Motor / White Blades

Performance

Model Number	Energy Information at High Speed		Voltage
	Airflow CFM	Power Use Watts	
1048	5314	51	120V
1048LED	5333	51	

ORDERING GUIDE

Example: 1048BN-BN or 1048LED-BN-BN

Model	Motor / Blade Finish
1048 52" Sweep, Pull Chain Light Kit Adaptable	BN-BN Brushed Nickel / Brushed Nickel BN-WT Brushed Nickel / Walnut OB-WT Oil Rubbed Bronze / Walnut WW-WW White / White
1048LED- 52" Sweep, Pull Chain Integrated Light Kit	

Sabio



- AC Motor | 3-speed | Reversible
- 3 MDF Blades | 12° pitch | Hugger
- Pull Chain Standard
- 1021-PC: 42" Sweep | 153 x 9mm
- 1022-PC: 52" Sweep | 153 x 14mm
- Remote or Wall Control Optional
- Integral LED Light Kit: 15W, 1521 lms (source), 789 lms (delivered), 3000K, 80 CRI, Dimmable



Brushed Nickel Motor / Walnut Blades




Brushed Nickel Motor / Brushed Nickel Blades



Oil Rubbed Bronze Motor / Walnut Blades



White Motor / White Blades

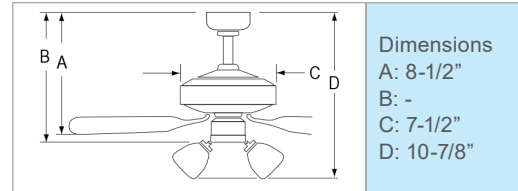

Dimensions
 A: 8-1/2"
 B: -
 C: 7-1/2"
 D: 10-7/8"

Performance

Model Number	Energy Information at High Speed		Voltage
	Airflow CFM	Power Use Watts	
1021-PC	3214	43.57	120V
1022-PC	4498	55.94	

ORDERING GUIDE

Example: 1021BN-BN-PC

Model	Motor / Blade Finish	Control
1021 42" Sweep Hugger	BN-BN Brushed Nickel / Brushed Nickel BN-WT Brushed Nickel / Walnut OB-WT Oil Rubbed Bronze / Walnut WW-WW White / White	-PC Pull chain included
1022 52" Sweep Hugger		

Specifications and dimensions subject to change. Lumens are delivered unless otherwise noted. See website for most current information.

Metalis



- AC Motor | 4-speed | Reversible
- 4 MDF Blades | 12° pitch | Hugger
- Pull Chain Standard
- 1023-PC: 42" Sweep | 153 x 9mm
- 1024-PC: 52" Sweep | 153 x 14mm
- Remote or Wall Control Optional
- Integral LED Light Kit: 15W, 1521 lms (source), 789 lms (delivered), 3000K, 80 CRI, Dimmable



Brushed Nickel Motor / Walnut Blades




Brushed Nickel Motor / Brushed Nickel Blades



Oil Rubbed Bronze Motor / Walnut Blades



White Motor / White Blades

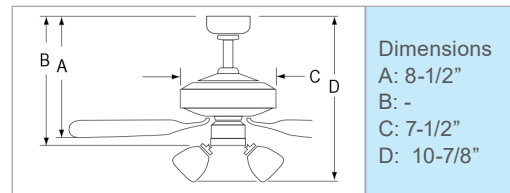

Performance

Model Number	Energy Information at High Speed		Voltage
	Airflow CFM	Power Use Watts	
1023-PC	3002	42.83	120V
1024-PC	4486	56.79	

ORDERING GUIDE

Example: 1024BN-BN-PC

Model	Motor / Blade Finish	Control
1023 42" Sweep Hugger	BN-BN Brushed Nickel / Brushed Nickel BN-WT Brushed Nickel / Walnut OB-WT Oil Rubbed Bronze / Walnut WW-WW White / White	-PC Pull chain included
1024 52" Sweep Hugger		

Specifications and dimensions subject to change.
 Lumens are delivered unless otherwise noted.
 See website for most current information.

Torque



- AC Motor | 3 Speed | Reversible
- 3 Wood blades | 11° pitch | 4" downrod
- Pull Chain Standard
- 52" Sweep | 153 x 18 mm
- Remote or Wall Control Optional
- 1073LED-PC: Integral LED Light Kit: 16W, 1293 lms (source), 908 lms (delivered), 3000K, 90 CRI, Dimmable



1073LED-PC Brushed Nickel Motor / Maple Blades

1073-PC



Oil Rubbed Bronze Motor / Walnut Blades


1073LED-PC



Oil Rubbed Bronze Motor / Walnut Blades



Brushed Nickel Motor / Maple Blades

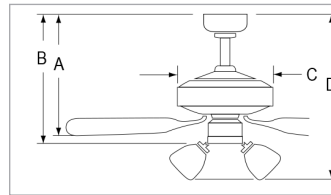

Dimensions

1073-PC	1073LED-PC
A: 9-1/2"	A: 9-1/2"
B: 12"	B: -
C: 6-1/2"	C: 6-1/2"
D: -	D: 13"

Performance

Model Number	Energy Information at High Speed		Voltage
	Airflow CFM	Power Use Watts	
1073-PC 1073LED-PC	5666	60	120V

ORDERING GUIDE

Example: 1073BN-WT-PC or 1073LED-BN-NM-PC

Model	Motor / Blade Finish	Pull Chain
1073 52" Sweep, Pull Chain	BN-NM Brushed Nickel / Natural Maple OB-WT Oil Rubbed Bronze / Walnut	-PC Pull Chain included
1073LED- 52" Sweep, Pull Chain with Integral LED Light Kit		

Specifications and dimensions subject to change. Lumens are delivered unless otherwise noted. See website for most current information.

Colibri



- AC Motor | 3 Speed | Reversible
- 60" Sweep | 188 x 12mm
- 3 ABS blades | 11° pitch | 4" downrod
- Remote or Wall Control Optional
- Pull Chain Standard
- 1072LED-PC: Integrated LED Light Kit: 15W LED, 1461 lms (source), 1018 lms (delivered), 3000K, 90 CRI, Dimmable



1072LED-PC Brushed Nickel Motor / Natural Maple Blades

1072-PC



Oil Rubbed Bronze Motor / Walnut Blades


1072LED-PC



Oil Rubbed Bronze Motor / Walnut



Brushed Nickel Motor / Maple Blades

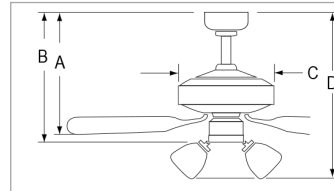

Dimensions

1072-PC	1072LED-PC
A: 8-1/2"	A: 9-31-32"
B: 11-1/2"	B: 13"
C: 9-1/4"	C: 9"
D: -	D: -

Performance

Model Number	Energy Information at High Speed		Voltage
	Airflow CFM	Power Use Watts	
1072-PC	7827	65.46	120V
1072LED-PC	7681	61.18	

ORDERING GUIDE

Example: 1072BN-NM-PC or 1072LED-BN-NM

Model	Motor / Blade Finish	Pull Chain
1072 60" Sweep		
1072LED- 60" Sweep with Integral LED Light Kit	BN-NM Brushed Nickel / Natural Maple OB-WT Oil Rubbed Bronze / Walnut	-PC Pull Chain included

Specifications and dimensions subject to change.
Lumens are delivered unless otherwise noted.
See website for most current information.

Aldea VII



Fan Motor

- AC Motor | 3-Speed | Reversible
- 3 ABS Waterproof Blades
- 11° pitch | 4" downrod
- 52" Sweep | 172 x 14mm
- Pull Chain Standard
- Remote or Wall Control Optional
- Light Kit Adaptable with wet listed 1RP69LED Light Kit (sold separately)
- Wet Location Listed



Matte Black Motor /
Matte Black Blades




Brushed Pewter Motor /
Brushed Pewter Blades



White Motor / White Blades



Oil Rubbed Bronze Motor /
Oil Rubbed Bronze Blades

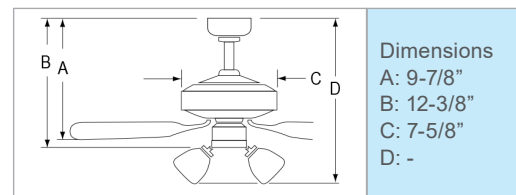

Performance

Model Number	Energy Information at High Speed		Voltage
	Airflow CFM	Power Use Watts	
1067	5600	50.9	120V

ORDERING GUIDE

Example: 1067BP-BP

Model	Motor / Blade Finish	
1067 52" Sweep, Pull Chain Light Kit Adaptable	BP-BP	Brushed Pewter / Brushed Pewter
	MBK-MBK	Matte Black / Matte Black
	OB-OB	Oil Rubbed Bronze / Oil Rubbed Bronze
	WW-WW	White / White

Specifications and dimensions subject to change.
Lumens are delivered unless otherwise noted.
See website for most current information.

Aldea VIII



Intertek Fan Motor

- AC Motor | 3-Speed | Reversible
- 4 ABS Waterproof Blades
- 11° pitch | 4" downrod
- 52" Sweep | 172 x 14mm
- Pull Chain Standard
- Remote or Wall Control Optional
- Light Kit Adaptable with wet listed 1RP69LED Light Kit (sold separately)
- Wet Location Listed



Matte Black Motor /
Matte Black Blades




Brushed Pewter Motor /
Brushed Pewter Blades



White Motor / White Blades



Oil Rubbed Bronze Motor /
Oil Rubbed Bronze Blades

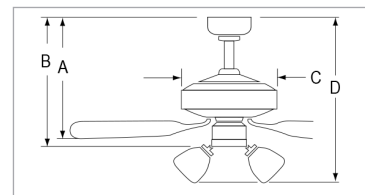

Dimensions
A: 9-7/8"
B: 12-3/8"
C: 7-5/8"
D: -

Performance

Model Number	Energy Information at High Speed		Voltage
	Airflow CFM	Power Use Watts	
1068	5500	50.5	120V

ORDERING GUIDE

Example: 1068BP-BP

Model	Motor / Blade Finish
1068	
52" Sweep, Pull Chain Light Kit Adaptable	BP-BP Brushed Pewter / Brushed Pewter MBK-MBK Matte Black / Matte Black OB-OB Oil Rubbed Bronze / Oil Rubbed Bronze WW-WW White / White

Specifications and dimensions subject to change.
Lumens are delivered unless otherwise noted.
See website for most current information.

Aldea IX



- AC Motor | 3-Speed | Reversible
- 5 ABS Waterproof Blades
- 11° pitch | 4" downrod
- 52" Sweep | 172 x 14mm
- Pull Chain Standard
- Remote or Wall Control Optional
- Light Kit Adaptable with wet listed 1RP69LED Light Kit (sold separately)
- Wet Location Listed




Matte Black Motor /
Matte Black Blades




Brushed Pewter Motor /
Brushed Pewter Blades



White Motor / White Blades



Oil Rubbed Bronze Motor /
Oil Rubbed Bronze Blades

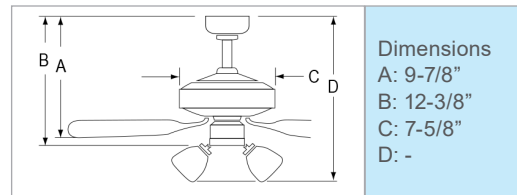

Performance

Model Number	Energy Information at High Speed		Voltage
	Airflow CFM	Power Use Watts	
1069	5197	50.28	120V

ORDERING GUIDE

Example: 1069BP-BP

Model	Motor / Blade Finish
1069 52" Sweep, Pull Chain Light Kit Adaptable	BP-BP Brushed Pewter / Brushed Pewter MBK-MBK Matte Black / Matte Black OB-OB Oil Rubbed Bronze / Oil Rubbed Bronze WW-WW White / White

Sunset



- AC Motor | 3 Speed | Reversible
- 52" Sweep | 153 x 12mm
- Light Kit Adaptable
- 5 ABS blades | 12° pitch | 4" downrod
- Pull Chain Standard
- Wet Location Listed



Brushed Pewter Motor /
Brushed Pewter Blades




Matte Black Motor / Matte
Black Blades



Oil Rubbed Bronze Motor /
Oil Rubbed Bronze Blades



White Motor / White Blades

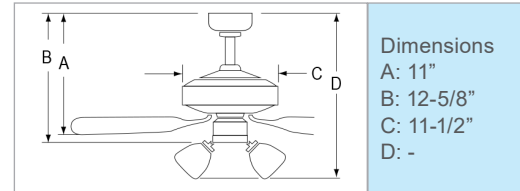

Performance

Model Number	Energy Information at High Speed		Voltage
	Airflow CFM	Power Use Watts	
1015W	4246	55.78	120V

ORDERING GUIDE

Example: 1015W-BN-BN

Model	Motor / Blade Finish
1015W- 52" Sweep, Wet Listed	BP-BP Brushed Pewter / Brushed Pewter
	MBK-MBK Matte Black / Matte Black
	OB-OB Oil Rubbed Bronze / Oil Rubbed Bronze
	WW-WW White / White

Specifications and dimensions subject to change.
Lumens are delivered unless otherwise noted.
See website for most current information.

Sunset II



Fan Motor


- AC Motor | 3 Speed | Reversible
- 42" Sweep | 153 x 9mm
- Light Kit Adaptable
- 5 ABS blades | 12° pitch | 4" downrod
- Pull Chain Standard
- Wet Location Listed



Brushed Pewter Motor /
Brushed Pewter Blades



White Motor / White Blades

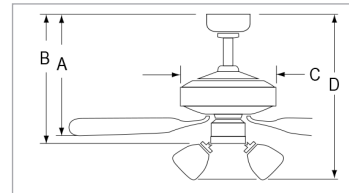

Dimensions
A: 10"
B: 11-1/2"
C: 9"
D: -

Performance

Model Number	Energy Information at High Speed		Voltage
	Airflow CFM	Power Use Watts	
1016W	3076	46.65	120V

ORDERING GUIDE

Example: 1016W-BP-BP

Model	Motor / Blade Finish
1016W- 42" Sweep, Wet Listed	BP-BP Brushed Pewter / Brushed Pewter WW-WW White / White

Specifications and dimensions subject to change.
Lumens are delivered unless otherwise noted.
See website for most current information.

Arctic



- DC Motor | 5-Speed | Reversible
- 7 Aluminum Blades | 18° pitch
- 8" & 24" downrod Included
- 1070W-WC: 70" Sweep | 180 x 17mm | WRC-70 Wall Control Included
- 1080W-WC: 80" Sweep | 180 x 17mm | WRC-80 Wall Control Included
- Energy Star 4.0 Compliant
- Wet Location Listed
- Light Kit Adaptable




Brushed Pewter Motor /
Brushed Pewter Blades



White Motor / White Blades



Oil Rubbed Bronze Motor /
Oil Rubbed Bronze Blades

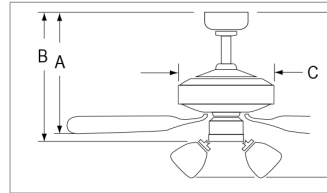

Dimensions

1070W	1080W
A: 11-1/4"	A: 11-1/4"
B: 17-1/4"	B: 17-1/4"
C: 8-3/4"	C: 8-3/4"
D: -	D: -

Performance

Model Number	Energy Information at High Speed		Voltage
	Airflow CFM	Power Use Watts	
1070W	10012	39.92	120V
1080W	11274	46.94	

ORDERING GUIDE

Example: 1070W-BP-BP-WC

Model	Motor / Blade Finish	Control
1070W- 70" Sweep	BP-BP Brushed Pewter / Brushed Pewter OB-OB Oil Rubbed Bronze / Oil Rubbed Bronze WW-WW White / White	-WC wall control included
1080W- 80" Sweep		

Specifications and dimensions subject to change.
Lumens are delivered unless otherwise noted.
See website for most current information.

Rio Grande



- DC Motor | 5-Speed | Reversible
- 88" Sweep | 155 x 20mm
- 1088LED: Integral LED Light Kit: 16W, 1521 lms (source), 551 lms (delivered), 3000K, 80 CRI, Dimmable
- 3 Platane Curved Wood Blades | 16° pitch | 8" & 24" downrods included
- WCR-88 Wall Control Included
- 1088: Not Light Kit Adaptable




Oil Rubbed Bronze / Walnut Blades

1088LED



Oil Rubbed Bronze Motor / Walnut Blades



Dimensions	
1088	1088LED
A: 14"	A: 14"
B: 16-3/8"	B: 16-3/8"
C: 5-15/16"	C: 5-15/16"
D: -	D: -

Performance

Model Number	Energy Information at High Speed		Voltage
	Airflow CFM	Power Use Watts	
1088	10956	44.37	120V
1088LED	10066	44.37	

ORDERING GUIDE

Example: 1088OB-WT or 1088LED-OB-WT


Model	Motor / Blade Finish
1088 88" Sweep	
1088LED- 88" Sweep, Integral LED Light Kit	OB-WT Oil Rubbed Bronze / Walnut

Specifications and dimensions subject to change. Lumens are delivered unless otherwise noted. See website for most current information.

Industrial




- AC Motor | 1 Speed
- 3 Metal blades | 11° pitch | 12" downrod
- 56" Sweep | 194 x 16mm
- Multiple Speeds Available with Optional Wall Control
- Fan Motor: 10 Year Limited Warranty

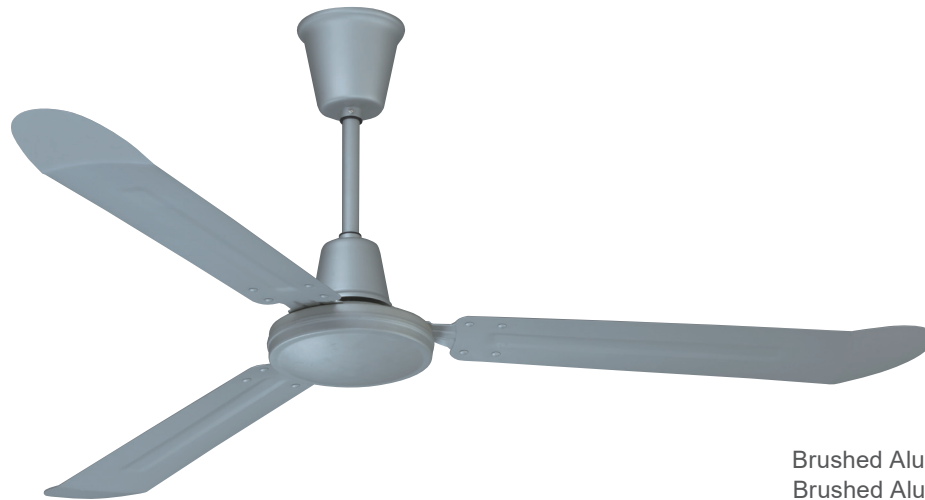

Brushed Aluminum Motor /
Brushed Aluminum Blades



White Motor / White Blades

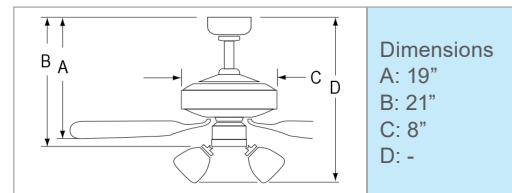

Performance

Model Number	Energy Information at High Speed		Voltage
	Airflow CFM	Power Use Watts	
1091	7876	58.9	120V

ORDERING GUIDE

Example: 1091BA-BA

Model	Motor / Blade Finish
1091 56" Sweep	BA-BA Brushed Aluminum / Brushed Aluminum WW-WW White / White

Specifications and dimensions subject to change.
Lumens are delivered unless otherwise noted.
See website for most current information.

Star Light



- AC Motor | 3 Speed | Reversible
- 52" Sweep | 153 x 12mm
- LED Light Kit Included: (3x) Candelabra E12 Socket, (3x) 4.5W LED bulbs included, 1050 lms (Delivered) 3000K, CRI 80, Dimmable
- 5 MDF blades | 12° pitch | 4" downrod
- Remote or Wall Control Optional
- Pull Chain Standard
- UL Listed



Matte Black Motor /
Matte Black Blades




Brushed Nickel Finish /
Walnut Blades



Oil Rubbed Bronze Finish /
Walnut Blades



Matte White Finish /
Matte White Blades

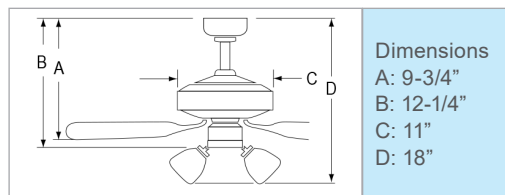

Performance

Model Number	Energy Information at High Speed		Voltage
	Airflow CFM	Power Use Watts	
1057-L	3020	39	120V

ORDERING GUIDE

Example: 1057BN-WT-L

Model	Motor / Blade Finish	Light Kit
1057 52" Sweep, AC Motor, Pull Chain	BN-WT Brushed Nickel / Walnut* MBK Matte Black / Matte Black MWW Matte White / Matte White OB-WT Oil Rubbed Bronze / Walnut**	-L : Light Kit Included

* Brushed Nickel blade finish on one side and Walnut blade finish on other side

** Oil Rubbed Bronze blade finish on one side and Walnut blade finish on other side

Specifications and dimensions subject to change.
Lumens are delivered unless otherwise noted.
See website for most current information.

Desert Moon



Intertek Fan Motor

- AC Motor | 3 Speed | Reversible
- 52" Sweep | 172 x 14mm
- Light Kit Adaptable
- 5 MDF blades | 11.5° pitch | 4" downrod
- Pull Chain Standard
- Energy Star 4.0 Compliant
- Remote or Wall Control Optional



Brushed Nickel Motor / Natural Maple Blades



Brushed Nickel Motor / Brushed Nickel Blades



Brushed Nickel Motor / Rosewood Blades



Brushed Nickel Motor / Walnut Blades




Oil Rubbed Bronze Motor / Walnut Blades



Brushed Nickel Motor / White Blades



White Motor / White Blades

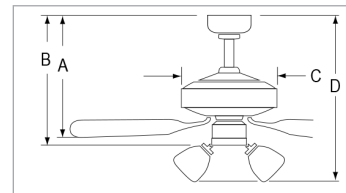

Dimensions
A: 11-7/8"
B: 12-5/8"
C: 11"
D: -

Performance

Model Number	Energy Information at High Speed		Voltage
	Airflow CFM	Power Use Watts	
1032	5017	49.84	120V

ORDERING GUIDE

Example: 1032BN-BN

Model	Motor / Blade Finish
1032 52" Sweep, Pull Chain	BN-BN Brushed Nickel / Brushed Nickel
	BN-NM Brushed Nickel / Natural Maple
	BN-RW Brushed Nickel / Rosewood
	BN-WW Brushed Nickel / White
	BN-WT Brushed Nickel / Walnut
	OB-WT Oil Rubbed Bronze / Walnut
	WW-WW White / White

Specifications and dimensions subject to change.
Lumens are delivered unless otherwise noted.
See website for most current information.

Royal Star



Fan Motor

- AC Motor | 3 Speed | Reversible
- 52" Sweep | 153 x 12mm
- Remote or Wall Control Optional
- 5 MDF blades | 12° pitch | 4" downrod
- Pull Chain Standard
- Light Kit Adaptable




Oil Rubbed Bronze Motor / Walnut Blades



White Finish / White Blades



Brushed Nickel Finish / Natural Maple Blades



Dimensions
 A: 10-1/16"
 B: 11-5/8"
 C: 11"
 D: -

Performance

Model Number	Energy Information at High Speed		Voltage
	Airflow CFM	Power Use Watts	
1052	3020	39	120V



Brushed Nickel Finish / White Blades



Brushed Nickel Finish / Brushed Nickel Blades



Brushed Nickel Finish / Walnut Blades



Brushed Nickel Finish / Rosewood Blades

ORDERING GUIDE

Example: 1052BN-BN

Model	Motor / Blade Finish
1052 52" Sweep, Pull Chain	BN-BN Brushed Nickel / Brushed Nickel
	BN-NM Brushed Nickel / Natural Maple
	BN-WT Brushed Nickel / Walnut
	BN-WW Brushed Nickel / White
	BN-RW Brushed Nickel / Rosewood
	OB-WT Oil Rubbed Bronze / Walnut
	WW-WW White / White

Specifications and dimensions subject to change.
 Lumens are delivered unless otherwise noted.
 See website for most current information.

Royal Knight




- AC Motor | 3 Speed | Reversible
- 5 MDF blades | 12° pitch | 4" downrod
- Pull Chain Standard
- 1053: 42" Sweep | 153 x 9 mm
- 1054: 30" Sweep | 153 x 9 mm
- Remote or Wall Control Optional
- Light Kit Adaptable



Brushed Nickel Motor /
Natural Maple Blades



White Motor / White Blades

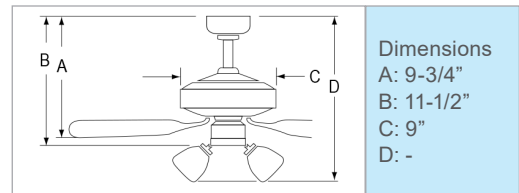

Performance

Model Number	Energy Information at High Speed		Voltage
	Airflow CFM	Power Use Watts	
1053	3195	47.41	120V
1054	2640	28	

ORDERING GUIDE

Example: 1054BN-BN

Model	Motor / Blade Finish
1053 42" Sweep, Pull Chain	BN-NM Brushed Nickel / Natural Maple
1054 30" Sweep, Pull Chain	WW-WW White / White

Specifications and dimensions subject to change.
Lumens are delivered unless otherwise noted.
See website for most current information.

Royal Knight Hugger



- AC Motor | 3 Speed | Reversible
- 5 MDF blades | 12° pitch
- Pull Chain Standard
- 1062-1: 52" Sweep | 153 x 15mm
- 1063-1: 42" Sweep | 153 x 12mm
- 1064-1: 30" Sweep | 153 x 12mm
- Remote or Wall Control Optional
- Light Kit Adaptable




Brushed Nickel Motor / Natural Maple Blades



Oil Rubbed Bronze Motor / Walnut Blades



White Motor / White Blades

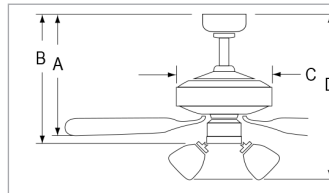

Dimensions

1062-1	1063-1	1064-1
A: 5-3/4"	A: 5"	A: 5"
B: 8-1/4"	B: 8-1/2"	B: 8-1/2"
C: 11"	C: 9-1/5"	C: 9-1/5"
D: -	D: -	D: -

Performance

Model Number	Energy Information at High Speed		Voltage
	Airflow CFM	Power Use Watts	
1062-1	2608	47.04	120V
1063-1	2684	43.83	
1064-1	2122	40.8	

ORDERING GUIDE

Example: 1062-1BN-NM

Model	Motor / Blade Finish
1062-1 52" Sweep Hugger	
1063-1 42" Sweep Hugger	BN-NM Brushed Nickel / Natural Maple OB-WT Oil Rubbed Bronze / Walnut WW-WW White / White
1064-1 30" Sweep Hugger	

Specifications and dimensions subject to change. Lumens are delivered unless otherwise noted. See website for most current information.

Caribbean



- AC Motor | 3 Speed | Reversible
- Pull Chain Standard
- Remote or Wall Control Optional
- 5 MDF blades | 12° pitch | 4" Downrod
- 52" Sweep | 153 x 12mm
- Light Kit Adaptable



Brushed Nickel Motor /
Brushed Nickel Blades



White Motor / White Blades




Brushed Nickel Motor /
Natural Maple Blades



Oil Rubbed Bronze Motor /
Walnut Blades



Brushed Nickel Motor /
Walnut Blades

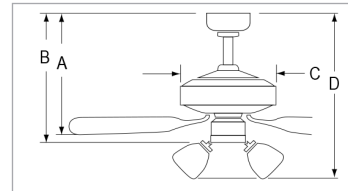

Dimensions
A: 11-1/4"
B: 12-3/5"
C: 11-3/5"
D: -

Performance

Model Number	Energy Information at High Speed		Voltage
	Airflow CFM	Power Use Watts	
1051	4180	65.74	120V

ORDERING GUIDE

Example: 1051BN-NM

Model	Motor / Blade Finish
1051 52" Sweep	BN-BN Brushed Nickel / Brushed Nickel BN-NM Brushed Nickel / Natural Maple BN-WT Brushed Nickel / Walnut OB-WT Oil Rubbed Bronze / Walnut WW-WW White / White

Specifications and dimensions subject to change.
Lumens are delivered unless otherwise noted.
See website for most current information.


Energy Star Ceiling Fan Light Kit



- 120V-60Hz
- 2 x 9W | E26 A19 LED | Dimmable | 3000K | 90 CRI | Lamps Included
- Shade: Satin White Glass
- Replacement Glass: 1RP8X-G
- Energy Star 4.0 Compliant
- cETLus Listed for damp location



White (WW)

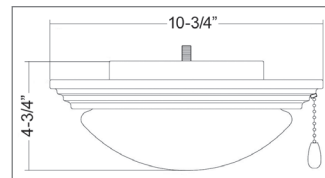

Brushed Nickel (BN)



Oil Rubbed Bronze (OB)



Black (BK)

ORDERING GUIDE


Example: 1RP8BN-ES

Model	Finish	Energy Star
1RP8	BN Brushed Nickel	-ES Energy Star
	BK Black	
	OB Oil Rubbed Bronze	
	WW White	

- 120V - 60Hz
- 3 x 9W | E26 A19 LED | Dimmable | 3000K | 90 CRI | Lamps Included
- 1RP18-ES: Alabaster Glass Shade
- 1RP18-SG-ES: White Satin Glass Shade
- Replacement Glass: 1RP18G 1RP18SG
- Energy Star 4.0 Compliant
- cETLus Listed for damp location



1RP18-ES
Oil Rubbed Bronze (OB)

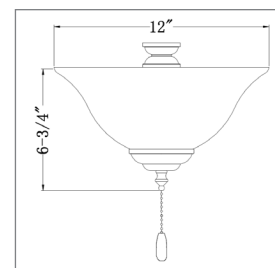

1RP18-SG-ES
Brushed Nickel (BN)



1RP18-ES
White (WW)



1RP18-ES
Black (BK)

ORDERING GUIDE


Example: 1RP18BN-SG-ES

Model	Finish	Glass	Energy Star
1RP18	BN Brushed Nickel	blank Alabaster Glass -SG Satin Glass	-ES Energy Star
	BK Black		
	OB Oil Rubbed Bronze		
	WW White		

Energy Star Ceiling Fan Light Kit



- 120V - 60 Hz
- 2 x 9W | E26 A19 LED | Dimmable | 3000K | 90 CRI | Lamps Included
- Shade: Satin White Acrylic lens
- Replacement Lens: 1RP22G
- Energy Star 4.0 Compliant
- cETLus Listed for damp location

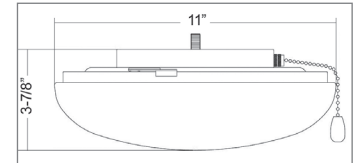

Brushed Nickel (BN)




White (WW)

ORDERING GUIDE

Example: 1RP22BN-ES

Model	Finish	Energy Star
1RP22	BN Brushed Nickel WW White	-ES Energy Star

- 120V - 60 Hz
- 2 x 9W | E26 A19 LED | Dimmable | 3000K | 90 CRI | Lamps Included
- Shade: Satin White Glass
- Replacement Glass: 1RP82-G
- Energy Star 4.0 Compliant
- cETLus Listed for damp location

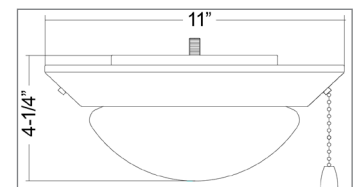

White (WW)



Oil Rubbed Bronze (OB)

ORDERING GUIDE

Example: 1RP82BN-ES

Model	Finish	Energy Star
1RP82	BN Brushed Nickel OB Oil Rubbed Bronze WW White	-ES Energy Star

Energy Star LED Light Kits



Can be added to the following Ceiling Fans: 1015W, 1016W, 1032, 1051, 1052, 1053, 1054, 1062-1, 1063-1, 1064-1, (Sold Separately)

White (WW), Brushed Nickel (BN), Brushed Pewter (BP), Black (BK) or Oil Rubbed Bronze (OB)

- 120V - 60Hz
- Dimmable
- Durable Steel and Satin Glass
- Energy Star Listed
- cETLus Listed

1RP31_-LED

BN, WW

17W | 1000 lms | 3000K | 90 CRI
W 10" x H 4-1/4"



1RP84_-LED

BN, BK, OB, WW

17W | 890 lms | 3000K | 90 CRI
W 11" x H 5"



1RP83_-LED

BN, OB, WW

17W | 950 lms | 3000K | 90 CRI
W 8" x H 2"



1RP88LED-_

BN, OB, WW

17W | 1200 lms | 3000K | 90 CRI
W 7-3/8" x H 1"
Use with Wall or Remote control only



1RP89LED-_

BN, OB

12W | 840 lms | 3000K | 90 CRI
W 7-3/8" x H 1"
Use with Wall or Remote control only



1RP69LED-_

BP, MBK, OB, WW

12W | 700 lms | 3000K | 90 CRI
W 7-5/8" x H 1-3/4"
Not Energy Star Listed



Integrated LED Light Kit

Can be added to the following Ceiling Fans: 1015W, 1016W, 1032, 1051, 1052, 1053, 1054, 1062-1, 1063-1, 1064-1, (Sold Separately)

White (WW), Brushed Nickel (BN), Brushed Pewter (BP), Black (BK) or Oil Rubbed Bronze (OB)

1RP32_-LED

BN, BK, OB, WW

17W | 1040 lms | 3000K | 80 CRI
W 11" x H 3-7/8"



E26 LED Light Kits

Can be added to the following Ceiling Fans: 1015W, 1016W, 1032, 1051, 1052, 1053, 1054, 1062-1, 1063-1, 1064-1, (Sold Separately)

Brushed Pewter (BP), Matte Black (MBK), Oil Rubbed Bronze (OB), White (WW)

1RP28_-E26-L

BP, MBK, OB, WW

Opal Glass
120V | 3 x 9W | E26 A19 LED |
Dimmable | 3000K | 90 CRI
Lamps Included
W 9-3/4" x H 5-5/8"



Specifications and dimensions subject to change.
Lumens are delivered unless otherwise noted.
See website for most current information.

Light Fitters



Available in White (WW), Brushed Nickel (BN), Brushed Pewter (BP), Black (BK), Matte Black (MBK), or Oil Rubbed Bronze (OB) finishes

- 120V - 60 Hz
- E26 A19 LED | Dimmable | 3000K | 80 CRI | Lamps Included
- Match with appropriate Shade Glass (sold separately)
- cETLus Listed for damp location

LK10_-E26-L
BN, OB, WW
 1 x 9.5W E26 A19 LED



LK12_-E26-L
BP, MBK, OB, WW
 1 x 9.5W E26 A19 LED
 Wet Listed



LK30_-E26-L
BN, OB, WW
 3 x 9.5W E26 A19 LED



LK412_-E26-L
BN, OB, WW
 4 x 9.5W E26 A19 LED



Side / Center Glass Shades

2004CG
 2-1/4" Clear Glass
 Use with LK30-E26-L,
 LK412-E26-L



2004FG
 2-1/4" Frosted Glass
 Use with LK30-E26-L,
 LK412-E26-L



2015CG
 2-1/4" Clear Glass
 Use with LK30-E26-L,
 LK412-E26-L



2015FG
 2-1/4" Frosted Glass
 Use with LK30-E26-L,
 LK412-E26-L



2021G
 2-1/4" Opal Glass
 Use with LK30-E26-L,
 LK412-E26-L



2061G
 2-1/4" Alabaster Glass
 Use with LK30-E26-L,
 LK412-E26-L



3001G
 4" White Opal Schoolhouse
 Use with LK10-E26-L,
 LK12-E26-L, LK412-E26-L



*Specifications and dimensions subject to change.
 Lumens are delivered unless otherwise noted.
 See website for most current information.*

Light Kit Covers

To be used to cover up integrated LED and E26 Light Kits when not needed.

Available in White (WW), Oil Rubbed Bronze (OB), or Brushed Nickel (BN)

LC-WW-102

White Steel
6-3/8" Diameter
For use with Fans: 1021-PC, 1022-PC, 1023-PC, and 1024-PC



LC-WW-79

White Steel
8-1/3" Diameter
For use with Fans: 1004, 1005, 1007, 1008, 1025, 1041, 1042, 1043, 1044, 1045, 1049, 1078, and 1079



LC-OB-102

Oil Rubbed Bronze Steel
6-3/8" Diameter
For use with Fans: 1021, 1022, 1023, 1024, and 1088LED



LC-OB-79

Oil Rubbed Bronze Steel
8-1/3" Diameter
For use with Fans: 1004, 1005, 1007, 1008, 1025, 1041, 1042, 1043, 1044, 1045, 1049, 1078, and 1079



LC-BN-102

Brushed Nickel Steel
6-3/8" Diameter
For use with Fans: 1021-PC, 1022-PC, 1023-PC, and 1024-PC



LC-BN-79

Brushed Nickel Steel
8-1/3" Diameter
For use with Fans: 1004, 1005, 1007, 1008, 1025, 1041, 1042, 1043, 1044, 1045, 1049, 1078, and 1079




LC-BK-79


Black Steel
8-1/3" Diameter
For use with Fans: 1004, 1005, 1007, 1008, 1025, 1041, 1042, 1043, 1044, 1045, 1049, 1078, and 1079



Fan Motor Finishes



OB-Oil Rubbed Bronze




BN-Brushed Nickel




BK-Black



MBK-Matte Black



WW-White



**BP-Brushed Pewter
OUTDOOR**

Wall Controls



Most RP Lighting Fans have a Pull Chain as the standard control for 3-speed or 4-speed control. There is also a forward/reverse switch to control the flow of air for cooling or warming. RP Lighting + Fans offers a full range of wall-mounted remote controls. (Sold Separately)

WC-3

- 2 Wire installation
- Rotary
- 4 speed fan control
- White knob included
- Face plate not included



WC-13

- White Finish
- Single slide
- 2 Wire installation
- 4 speed fan control
- Fan up to 1.25 Amps



WC-4

- White Finish
- Single slide
- 3 Wire installation
- 3 speed fan control
- Designed only for multiple fan use
- Fan up to 5 Amps



WC-16

- White Finish
- Single slide
- 3 Wire installation
- 3 speed fan control
- On / Off Light Control
- Fan up to 1.25 Amps



WC-8

- White Finish
- Dual slide
- 4 speed fan control
- 3 Wire installation
- Full range light dimming
- Compatible with LED, CFL and Incandescent



Remote Controls



Our basic remote controls are sold separately and are adaptable to most of our fans throughout the line. They operate from a wireless radio frequency and with the touch of a button you can control the fan's three, or four, speeds and full range of light dimming from off to full bright at distances of up to 50 feet. This remote control system has a ceiling mounted receiver, a hand held 9-volt battery powered transmitter, and a wall mounting bracket.

RC-10

- Fan / Light Remote Control
- Canopy mount
- 3 speed fan control
- Full range light dimming
- Compatible with LED, CFL
- Universal with all fans



Downrods & Connectors

Downrod Connector





For extra high ceilings - this coupler allows two downrods to be connected together.

Available in brushed nickel (BN), black (BK), oil rubbed bronze (OB), white (WW)










Downrods

1/2" Diameter decorative downrods are available in a variety of sizes and finishes. For best performance and appearance, use an extension downrod with your ceiling fan when installing on a sloped ceiling.

		Downrod Model # / Length									
Finishes		E12	E18	E24	E36	ER36*	E48	ER48*	E60	ER60*	E72
	White (WW)	X	X	X	X		X		X		X
	Black (BK)	X	X	X	X	X	X		X		X
	Brushed Nickel (BN)	X	X	X	X	X	X	X	X	X	X
	Oil Rubbed Bronze (OB)							X		X	

It is recommended that there is at least 7' of clearance under your ceiling fan blades - the standard 4" downrod should work in most 8' ceiling installation.

1/2" down rod connector joins two downrods together for extended lengths. Do not exceed 144" (two 72" downrods connected together is the maximum length recommended)

		Ceiling Height (in feet)						
		9'	10'	11'	12'	13'	14'	15'
Downrod Model# / Length	12"							
	18"							
	24"							
	36"							
	48"							
	60"							
	72"							

Tear Drops



T-09 WH



T-09 NM



T-09 BK



T-09 WT








T-09 BN

Specifications and dimensions subject to change. Lumens are delivered unless otherwise noted. See website for most current information.

Room Size Compatibility


Measurements are for general air flow requirements only. Decorating plans or aesthetic considerations should influence your fan choices beyond these room size specifications.

For large rooms, multiple fans are recommended.


					
Blade Sweep	80"	70"	56" - 60"	50" - 52"	30" - 42"
Approximate Room Size	20' x 20' Over 200 sq. ft.	15' x 15' Over 180 sq. ft.	12' x 15' 160-180 sq. ft.	10' x 12' 100-150 sq. ft.	6' x 8' 40-60 sq. ft.

Hanging Systems


Tri-mount system (flush mount, standard mount and vaulted ceilings up to 45°)



FLUSH



DOWNROD



VAULTED

Sloped Ceiling Adapter Kit

Slope adapters for ceiling pitch from 30° to 45°

Large ceiling mount bracket stabilizes the junction box in ceiling for a smoother and quieter performance.



SA45 WW



SA45 BN





SA45 OB

Ceiling Fan Dimensions

Series	Model #	Dimensions (inches)			
		A	B	C	D
Europa	1004-E26-L	10-1/4"	--	10"	15-1/4"
Mirage	1005-E26-L	10-1/4"	--	10"	16"
Mirage	1005LED	10-1/4"	--	10"	16"
Europa I	1007-E26-L	10-1/2"	--	10"	16"
Europa I	1007LED	10-1/2"	--	10"	16"
Europa	1008LED	10-1/4"	--	10"	15-1/4"
Sunset	1015W	11"	12-5/8"	11-1/2"	--
Sunset II	1016W	10"	11-1/2"	9"	--
Sabio	1021-PC	7-1/4"	--	10-7/8"	7-1/2"
Sabio	1022-PC	7-1/4"	--	10-7/8"	7-1/2"
Metalis	1023-PC	7-1/4"	--	10-7/8"	7-1/2"
Metalis	1024-PC	7-1/4"	--	10-7/8"	7-1/2"
Mirage I	1025-E26-L	10-1/2"	--	10"	16"
Mirage I	1025LED	10-1/2"	--	10"	16"
Desert Moon	1032	11-7/8"	12-5/8"	11"	--
Europa II	1041-E26-L	10-1/4"	--	10"	15-1/4"
Europa II	1041LED	10-1/4"	--	10"	15-1/4"
Mirage II	1042E26-L	10-1/4"	--	10"	15-1/4"
Mirage II	1042LED	10-1/4"	--	10"	15-1/4"
Contempo IV	1043LED	10-1/4"	--	10"	15-1/4"
Europa IV	1044LED	10-1/4"	--	10"	15-1/4"
Mirage IV	1045LED	10-1/4"	--	10"	15-1/4"
Aldea III	1046	9-3/4"	12-1/4"	7-5/8"	-
Aldea III	1046LED	9-3/4"	12-1/4"	--	13"
Aldea IV	1047	9-3/4"	12-1/4"	7-5/8"	-
Aldea IV	1047LED	9-3/4"	12-1/4"	--	13"
Aldea VI	1048	9-3/4"	12-1/4"	7-5/8"	-
Aldea VI	1048LED	9-3/4"	12-1/4"	--	13"
Contempo II	1049-E26-L	10-1/4"	--	10"	15-1/4"
Contempo II	1049LED	10-1/4"	--	10"	15-1/4"
Caribbean	1051	11-1/4"	12-3/5"	11-3/5"	--
Royal Star	1052	10-1/16"	11-5/8"	11"	--
Royal Knight	1053	9-3/4"	11-1/2"	9"	--
Royal Knight	1054	9-3/4"	11-1/2"	9"	--
Star Light	1057-L	9-3/4"	12-1/4"	11"	18"
Royal Knight Hugger	1062-1	6-1/8"	8-1/4"	11"	--
Royal Knight Hugger I	1063-1	5"	8-1/2"	9-1/5"	--
Royal Knight Hugger I	1064-1	5"	8-1/2"	9-1/5"	--
Aldea V	1065	9-3/4"	12-1/4"	7-5/8"	-
Aldea V	1065LED	9-3/4"	12-1/4"	--	13"
Aldea VII	1067	9-7/8"	12-3/8"	7-5/8"	-
Aldea VIII	1068	9-7/8"	12-3/8"	7-5/8"	-
Aldea IX	1069	9-7/8"	12-3/8"	7-5/8"	-
Arctic	1070W	11-1/4"	17-1/4"	8-3/4"	--
Aldea	1071	9-3/4"	12-1/4"	6-7/8"	--
Aldea	1071LED	9-3/4"	--	6-7/8"	13"
Colibri	1072-PC	9-31/32"	13"	9"	--
Colibri	1072LED-PC	9-31/32"	--	9"	13-1/2"
Torque	1073-PC	9-1/2"	12"	6-1/2"	--
Torque	1073LED-PC	9-1/2"	--	6-1/2"	13"
Aldea II	1074	9-3/4"	12-1/4"	6-7/8"	--
Aldea II	1074LED	9-3/4"	--	6-7/8"	13"
Contempo I	1078-E26-L	10-1/2"	--	10"	16"
Contempo I	1078LED	10-1/2"	--	10"	16"
Contempo	1079-E26-L	10-1/4"	--	10"	16"
Contempo	1079LED	10-1/4"	--	10"	16"
Arctic	1080W	11-1/4"	17-1/4"	8-3/4"	--
Rio Grande	1088	14"	16-3/8"	5-15/16"	--
Rio Grande	1088LED	14"	16-3/8"	5-15/16"	--
Industrial	1091	19"	21"	8"	--

Dimension A and B are measured with standard downrod included with the fan.

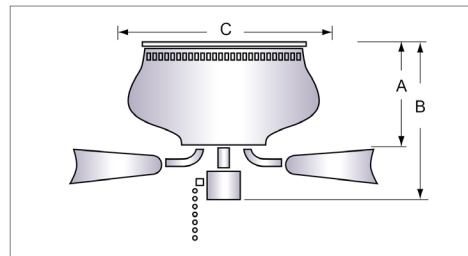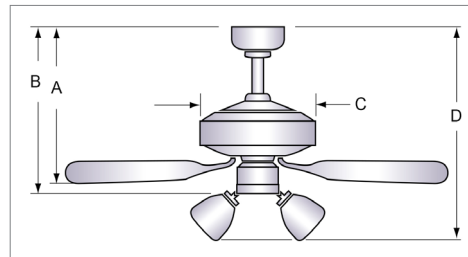

Specifications and dimensions subject to change. Lumens are delivered unless otherwise noted. See website for most current information.

Ceiling Fan Specifications

Model #	Blade Sweep	Motor Size (m/m)	Speed (RPM)		Airflow (CFM)	No. of Blades	Blades Pitch (Deg.)	Electricity Used Watts	Estimated Yearly Energy Cost	Airflow Efficiency	Amps	Capacitor
			High	Low								
1004-E26-L	50"	153 x 15	214	100	5351	4	12	61.96	11	86.4	0.52	3
1005-E26-L	50"	153 x 15	196	84	5149	5	12	59.6	11	86.4	0.5	3
1005LED	50"	153 x 15	196	84	5149	5	12	59.6	11	86.4	0.5	3
1007-E26-L	50"	153 x 15	228	109	5300	4	12	58.66	11	90.4	0.49	3
1007LED	50"	153 x 15	228	109	5300	4	12	58.66	11	90.4	0.55	3
1008LED	50"	153 x 15	214	100	5351	4	12	61.96	11	86.4	0.52	3
1015W	52"	153 x 12	166	79	4246	5	12	55.78	10	76.1	0.47	3
1016W	42"	153 x 9	220	90	3076	5	12	46.65	8	65.9	0.39	3
1021-PC	42"	153 x 9	232	97	3214	3	12	43.57	8	73.8	0.36	3
1022-PC	52"	153 x 14	189	84	4498	3	12	55.94	10	80.4	0.47	3
1023-PC	42"	153 x 9	210	84	3002	4	12	42.83	8	70.1	0.36	3
1024-PC	52"	153 x 14	177	81	4486	4	12	56.79	10	79.0	0.48	3
1025-E26-L	50"	153 x 15	204	89	5246	5	12	59.23	11	88.6	0.5	3
1025LED	50"	153 x 15	204	89	5246	5	12	59.23	11	88.6	0.5	3
1032	52"	172 x14	197	79	5017	5	11.5	49.84	9	100.7	0.47	3
1041-E26-L	44"	153 x 15	239	120	4255	4	12	49.48	10	86.0	0.42	3
1041LED	44"	153 x 15	239	120	4255	4	12	49.48	10	86.0	0.42	3
1042-E26-L	44"	153 x 12	217	111	4020	5	12	48.63	10	82.7	0.42	3
1042LED	44"	153 x 12	217	111	4020	5	12	48.63	10	82.7	0.42	3
1043LED	52"	172 x14	214	88	5540	3	12	49	9	113.1	0.46	3
1044LED	52"	172 x14	198	81	5454	4	12	49.21	9	110.8	0.46	3
1045LED	52"	172 x14	177	73	5224	5	12	50.16	9	104.1	0.47	3
1046	52"	172 x14	200	83	5538	3	11	50	9	110.8	0.45	3
1046LED	52"	172 x 14	198	81	5531	3	11	50.22	9	110.1	0.45	3
1047	52"	172 x14	184	74	5400	5	11	50.4	9	107.1	0.46	3
1047LED	52"	172 x 14	182	73	5420	5	11	50.5	9	107.3	0.46	3
1048	52"	172 x 14	171	70	5314	5	11	51	9	104.2	0.47	3
1048LED	52"	172 x 14	170	68	5333	5	11	51	9	104.6	0.47	3
1049-E26-L	44"	153 x 15	264	147	4361	3	12	47.71	10	91.4	0.41	3
1049LED	44"	153 x 15	264	147	4361	3	12	47.71	10	91.4	0.41	3
1051	52"	153 x 12	170	70	4180	5	12	65.74	11	63.6	0.53	3
1052	52"	153 x 12	162	75	3020	5	12	39	11	77.4	0.51	3
1053	42"	153 x 9	217	88	3195	5	12	47.41	8	67.4	0.4	3
1054	30"	153 x 9	280	115	2640	5	16	28	8	94.3	0.37	3
1057-L	52"	153 x 12	162	75	3020	5	12	39	11	77.4	0.51	3
1062-1	52"	153 x 15	156	74	2608	5	12	47.04	9	55.4	0.4	3
1063-1	42"	153 x 12	200	85	2684	5	12	43.83	8	61.2	0.37	3
1064-1	30"	153 x 12	307	139	2122	5	12	40.8	7	52.0	0.34	3
1065	52"	153 x 12	174	73	5156	5	11	58.64	10	87.9	0.49	3
1065LED	52"	153 x 12	174	73	5156	5	11	58.64	10	87.9	0.49	3
1067	52"	172 x 14	209	83	5600	5	11	50.9	9	110.0	0.46	3
1068	52"	172 x 14	190	73	5500	5	11	50.5	9	108.9	0.46	3
1069	52"	172 x 14	164	64	5197	5	11	50.28	9	103.4	0.46	3
1070W	70"	180 x 17	145	76	10012	7	15	39.92	7	250.8	0.58	0
1071	52"	153 x 12	195	73	4899	4	11	57	10	85.9	0.5	3
1071LED	52"	153 x 12	177	71	4945	4	11	57.63	10	85.8	0.48	3
1072-PC	60"	188 x 12	182	58	7827	3	11	65.46	11	119.6	0.54	3
1072LED-PC	60"	188 x 12	174	57	7681	3	11	61.18	11	125.5	0.538	3
1073-PC	52"	153 x 18	204	79	5666	3	11	60	10	94.4	0.5	3
1073LED-PC	52"	153 x 18	204	79	5666	3	11	60	10	94.4	0.5	3
1074	52"	153 x 12	196	78	5062	3	11	57.38	10	88.2	0.48	3
1074LED	52"	153 x 12	194	78	5062	3	11	57.45	10	88.1	0.48	3
1078-E26-L	50"	153 x 15	234	106	5449	3	12	57.26	11	95.2	0.48	3
1078LED	50"	153 x 15	234	106	5449	3	12	57.26	11	95.2	0.48	3
1079-E26-L	50"	153 x 15	229	100	5204	3	12	57.74	11	90.1	0.48	3
1079LED	50"	153 x 15	229	100	5204	3	12	57.74	11	90.1	0.48	3
1080W	80"	181 x 17	101	61	11274	7	18	46.94	9	240.2	0.66	0
1088	88"	155 x 20	102	49	10956	3	16	44.37	8	246.9	0.63	0
1088LED	88"	155 x 20	102	49	10066	3	16	44.37	8	226.9	0.63	0
1091	56"	194 x 16	310	100	7876	3	10	58.9	-	133.7	0.491	1

Except industrial fan model #1091, all ceiling fans measured airflow according to DOE test method, all estimates based on typical use, excluding lights.

Specifications and dimensions subject to change.
Lumens are delivered unless otherwise noted.
See website for most current information.

Energy Saving Features

Oversized, Triple Mounting Systems

and heavy duty die cast hanging ball which eliminates wobble problems and provides maximum angles up to 35° for sloped and vaulted ceiling.

Precision ground solid steel motor shaft fixed into stators, create no wobble and friction.

Self-lubrication, permanently **double sealed ball bearings**.

Pure aluminum die cast rotors provide the most energy efficiency possible.

Motor housing is stamped or die casted, **triple plated and double casted** with corrosion resistors. Housings are matched for a perfect fit.

Heavy duty copper wiring.

Detachable switch housing with pre-wired plug in connector makes installation quick and easy. Light kit adaptable.

Heavy duty, **UL approved switches** give constant speed and action through entire operation and warranty.

52" or 76" lead wire on downrod ceiling fans, virtually eliminates splicing to accommodate longer downrod.

Maximum security, dual locking system, Threaded coupling to fit downrod tightly **Safety cable installed**.


No motor burn out from heat built up because our 16 pole motors have fiberglass insulation and silicon steel laminations.

Lifetime quality, vacuum dipped and lacquered stator provides constant magnetic operation.

3 speed with reversible switch can be used for summer/winter air flow.


DC Motors are utilized for maximum efficiency on our largest fans (1070, 1080).

Triple capacitors for more silent operation.

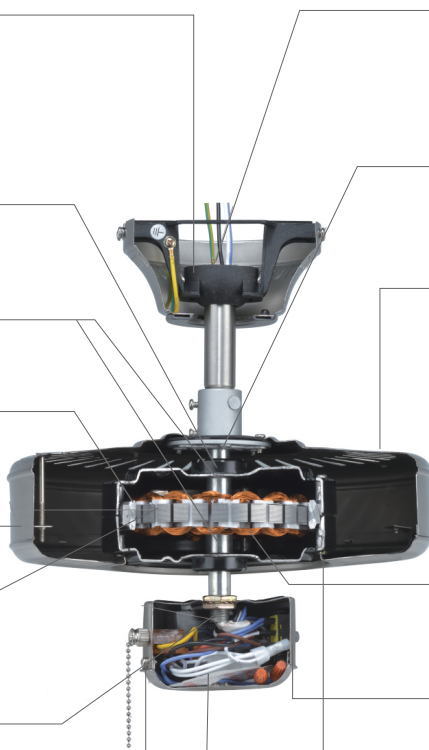


Summer

In the warm months of summer, switch your fan to turn counter clockwise in order to make your room feel up to 7°C cooler.

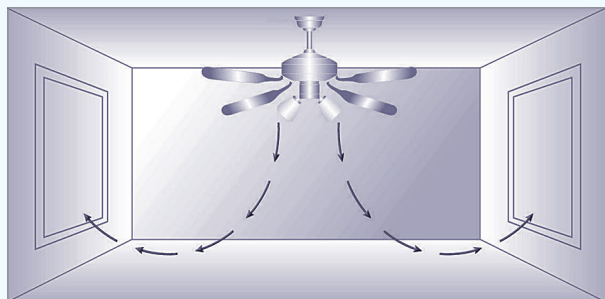

Winter

In the cooler months of autumn and winter, switch your fan to turn clockwise in order to recirculate the hot air that has been trapped near the ceiling.

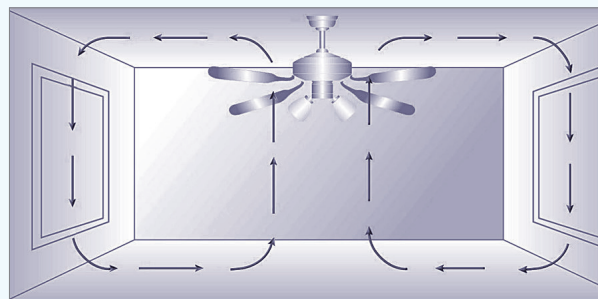



Recessed Lighting



Recessed Lighting Housing Overview

Commercial Housing



8320H
2" Round Frame-In LED
Page 62



8321H
2" Square Frame-In LED
Page 62




8120H
4" LED Frame-In
Page 64



8120HIC
4" LED IC Airtight Frame-In
Page 64



8121H
4" LED Architectural Housing
Page 64



8199HICA-FR
6" LED 2-Hour Fire Rated
Page 68



8122H
6" LED Frame-In
Page 70



8122HIC
6" LED IC Airtight Frame-In
Page 70



8124H
6" LED Architectural Housing
Page 70



8162H
6" LED High Output Architectural
Housing
Page 72



8163H
8" LED High Output Architectural
Housing
Page 73



8125H
6" LED Frame-In
Page 74



8125HIC
8" LED IC Airtight Frame-In
Page 74



8126H
8" LED Architectural Housing
Page 74



8041
4" Non-IC, LED Retrofit
Page 76



8061
6" Non-IC, LED Retrofit
Page 76



8081
8" Non-IC, LED Retrofit
Page 76

For all IC Rated housing consult factory if using cellulose, blown-in or foam insulation.

Specifications and dimensions subject to change.
Lumens are delivered unless otherwise noted.
See website for most current information.

Recessed Lighting Housing Overview

Residential Housing cont.



8317H
3" LED IC Frame-In
Page 78



8317HR
3" LED IC Remodel
Page 78



8215HA
4" LED IC Airtight Frame-In
Page 80



8215HRA
4" LED IC Airtight Remodel
Page 80



8117HA
6" LED IC Airtight Shallow Frame-In
Page 82




8117HRA
6" LED IC Airtight Shallow Remodel
Page 82



8201HA
4" Airtight Frame-In
Page 84



8201HRA
4" Airtight Remodel
Page 84



8202HA
4" IC Airtight Frame-In
Page 84



8116HIC
6" LED IC Airtight Frame-In
Page 87



8102HAQ
6" IC Airtight Frame-In
Page 88



8102HRA
6" IC Airtight Remodel
Page 88



8104HICA
6" IC Airtight Shallow Frame-In
Page 88



8708
4" LED Retrofit Kit
Page 91



8711
4" LED Retrofit Trim,
2.25" Aperture
Page 91



8742-2
4" LED Ultra-Thin Light
Page 92



8542-2
6" LED Ultra-Thin Light
Page 92



8842
3" LED Ultra-Thin Light
Page 93



8642
8" LED Ultra-Thin Light
Page 93



8775
4" IC Rated, LED Retrofit & New
Construction J-Box Downlight
Page 94



8545
6" IC Rated, LED Retrofit & New
Construction J-Box Downlight
Page 95



8776
4" IC Rated, LED Recessed
Adjustable Gimbal J-Box Downlight
Page 96

Specifications and dimensions subject to change.
Lumens are delivered unless otherwise noted.
See website for most current information.

Recessed Lighting Housing Overview

Recessed Alternative



8739
5" Slim Round Disk
Page 97



8536
7" Slim Round Disk
Page 97



8539
7" Slim Round Disk
Page 97



8748
5" Square Ceiling Mount
Page 98



8548
6" Square Ceiling Mount
Page 98



8756
4" Low-Profile Disk
Page 99



8556
6" Low-Profile Disk
Page 99



8556-S
6" Low-Profile Closet Light
Page 100



8557
6" LED, CCT Selectable,
Low-Profile Disk
Page 100



8538
7" Flat Lens Disk
Page 101



8569
7" High Lumen Flat Lens Disk
Page 101



8554
9" LED Low-Profile Disk Light
Page 102

Warranty Information



Integrated LED Lights



Other Components

*Specifications and dimensions subject to change.
Lumens are delivered unless otherwise noted.
See website for most current information.*


2" Frame-In LED




- 120V-277V Universal Housing
- Dimmable TRIAC, 10-100% And 0-10V DC Dimming
- 50,000 Hours Projected Life
- 2700K | 3000K | 80 CRI
- Beam Spread Options: 15°N | 38°M | 60°W
- Adjustable Trims: 0-30° tilt | 356° rotational
- cCSAus Listed for damp location
- 5 Year Limited Warranty
- Captive Bar Hangers Included



8320H
2" Round LED Frame-In

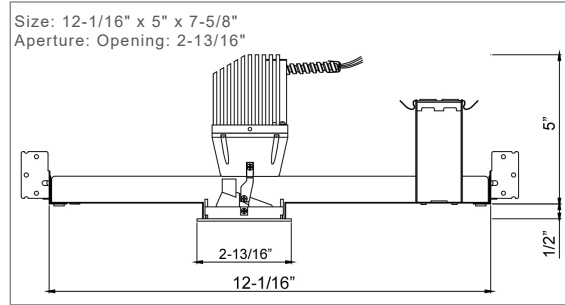

8321H
2" Square LED Frame-In

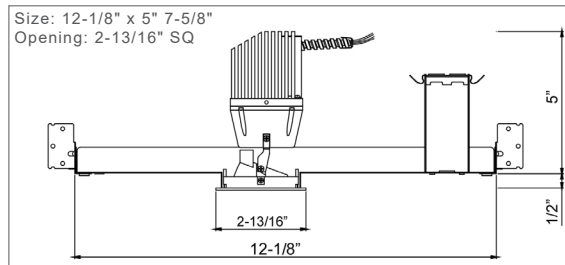

ORDERING GUIDE

Example: 8320H-10-30-38M-EM


Model #	Wattage	Color Temp	Beam Spread	Emergency
8320H	-10 10W, 870lms	-27 2700K	-15N	blank no EM Option
8321H	-15 15W, 1200lms	-30 3000K	-38M	-EM adds Battery Pack
	-23 23W, 1800lms		-60W	

Trims For 8320H

Wattage, lumen output, and CCT determined by housing choice.
Check housing Ordering Guide. Trim Aperture = 2-1/4"

8861AJ

0-30° Tilt White Cone
356° Rotational



ORDERING GUIDE Example: 8861AJ-WH


Model #	Finish
8861AJ	-WH White

Trims For 8321H

Wattage, lumen output, and CCT determined by housing choice.
Check housing Ordering Guide. Trim Aperture = 2-1/4"

8862AJ

0-30° Tilt White Cone
356° Rotational




ORDERING GUIDE Example: 8862AJ-WH

Model #	Finish
8862AJ	-WH White

8861S

Straight White Cone




ORDERING GUIDE Example: 8861S-WH

Model #	Finish
8861S	-WH White

8862S

Straight White Cone



ORDERING GUIDE Example: 8862S-WH

Model #	Finish
8862S	-WH White


4" LED Housings




- 120V-277V Universal Voltage
- Dimmable TRIAC, 10-100% And 0-10V DC Dimming
- 50,000 Hours Projected Life
- 3000K | 3500K | 4000K | 5000K | 80+ CRI
- 14W | 1150 lms 23W | 1950 lms
- 8120H & 8121H | 4-7/8" height for 2"x 6" construction
- 8120H & 8120HIC | Captive Bar Hangers Included
- Energy Star Listed – 3000K & 4000K only
- 8120H & 8121H – cCSAus Listed
- 8120HIC – cETLus Listed
- 5 Year Limited Warranty




8120H
4" LED Frame-In

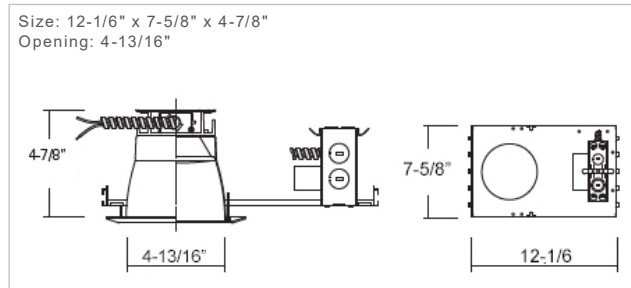

8120HIC
4" LED IC Airtight Frame-In

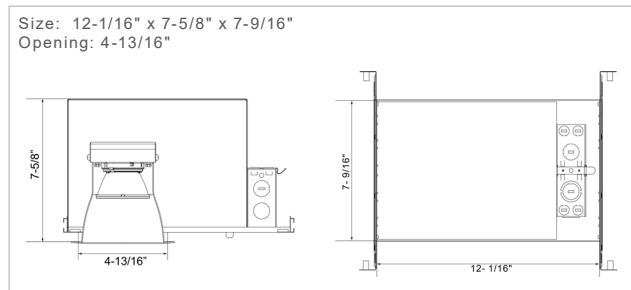

8121H
4" LED Architectural Housing

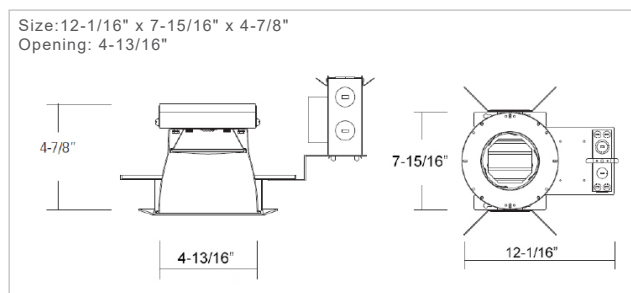

8096B

Optional Two Piece Bar Hanger set
24" Joist Span



ORDERING GUIDE

Example: 8120HIC-14-30-EM

Model #	Wattage	CCT	Emergency
8120H	-14 14W	-30 3000K	blank no EM option
8120HIC	-23 23W	-35 3500K	EM adds EM Battery Pack
8121H		-40 4000K	
		-50 5000K	


Trims For 8120H, 8120HIC and 8121H

Wattage, lumen output, and CCT determined by housing choice. Check housing Ordering Guide.

8590




Haze Cone Reflector




ORDERING GUIDE Example: 8590HZ

Model #	Finish
8590	HZ Haze

8586




Haze Reflector with White Baffle




ORDERING GUIDE Example: 8586WH

Model #	Finish
8586	WH White

8587



Haze Reflector with White Baffle with lens





ORDERING GUIDE Example: 8587WH

Model #	Finish
8587	WH White

6" LED 2-Hour Fire Rated IC Airtight New Construction



- 120V-277V Universal Voltage
- Dimmable TRIAC, 10-100%
- 50,000 Hours Projected Life
- 3000K | 4000K | 90 CRI
- IC Rated for direct contact with installation
- 1-1/2" ceiling thickness adjustment
- Captive Bar Hangers Included
- Housing: cULus Listed; select trims wet location
- UL 1598 rated | 2-hr fire rating UL263
- ASTM-E283 Listed for Air-tight construction
- 5 Year Limited Warranty

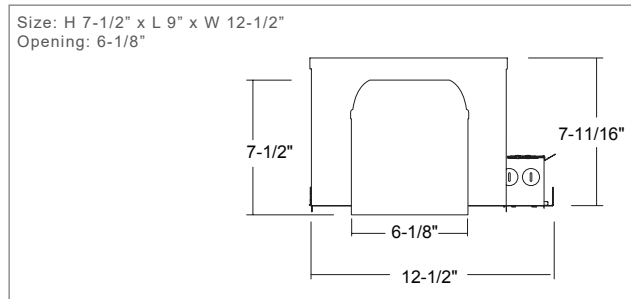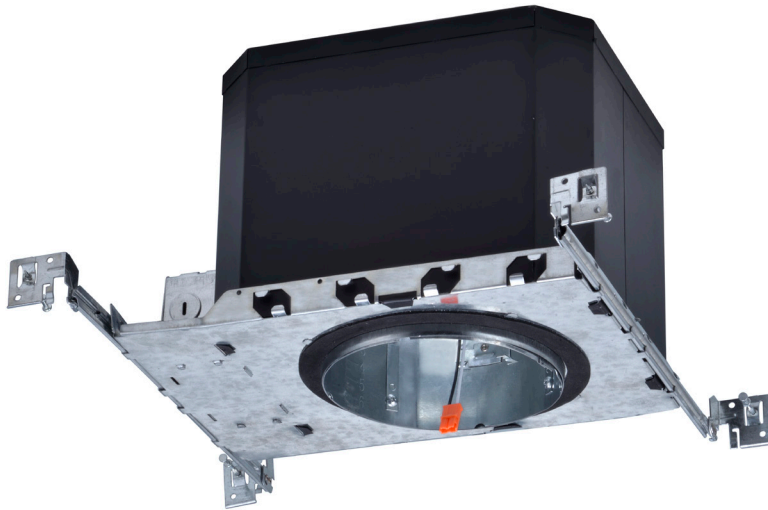

ORDERING GUIDE

Example: 8199HICA-FR-EM

Model #	Emergency	
8199HICA-FR	blank -EM	no EM option added adds Battery Pack


Trims For 8199HICA-FR

277V Trims Available By Special Order. Please contact RP Lighting + Fans for information.

8523



Recessed White Baffle
120V | 12.5W |
850 lms
Wet Location



ORDERING GUIDE


Example: 8523WH-90-3K

Model #	Finish	CRI	CCT
8523	WH White	-90	-3K 3000K -4K 4000K

8562



Recessed Gimbal
120V | 13W |
900 lms



ORDERING GUIDE


Example: 8562WH-90-3K

Model #	Finish	CRI	CCT
8562	BN Brushed Nickel BK Black OB Oil Rubbed Bronze WH White	-80	-3K 3000K

8563



Recessed Reflector
120V | 13W |
795 lms
Wet Location



ORDERING GUIDE


Example: 8563CL-90-3K

Model #	Finish	CRI	CCT
8563	BN Brushed Nickel BK Black CL Clear OB Oil Rubbed Bronze WH White	-90	-3K 3000K

8568



Recessed High Output Reflector
120V | 17W |
1240 lms
Wet Location



ORDERING GUIDE

Example: 8568WH-90-3K

Model #	Finish	CRI	CCT
8568	BK Black CL Clear ¹ OB Oil Rubbed Bronze WH White	-90	-3K 3000K -4K 4000K

1 - Only available in -90-3K


6" LED Housings




- 120V-277V Universal Housing
- Dimmable TRIAC, 10-100% And 0-10V DC Dimming
- 50,000 Hours Projected Life
- 3000K | 3500K | 4000K | 5000K | 80 CRI
- 14W | 1150 lms 23W | 1950 lms
- 30W | 2720 lms 45W | 3640 lms
- 8122H & 8122HIC | Captive Bar Hangers Included
- Energy Star Listed – 3000K & 4000K only
- cCSAus Listed for damp location; select trims wet location
- 5 Year Limited Warranty




8122H
6" LED Frame-In

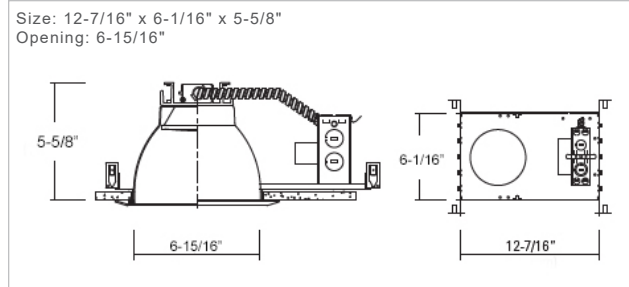

8122HIC
6" LED IC Airtight Frame-In

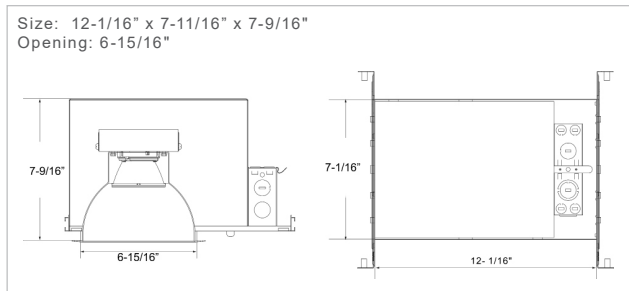


8124H
6" LED Architectural Housing

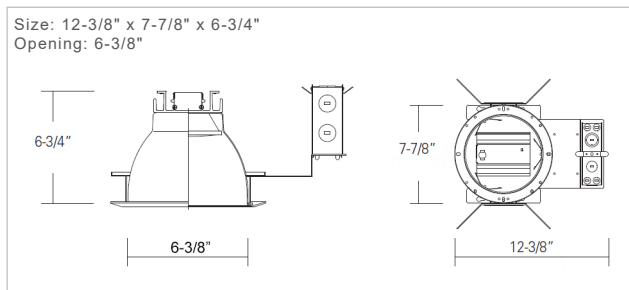

8096B

Optional Two Piece Bar Hanger set
24" Joist Span

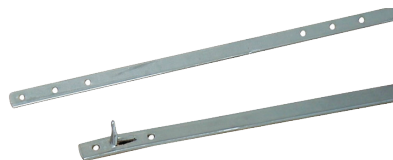

ORDERING GUIDE

Example: 8122H-14-40-EM

Model #	Wattage		CCT		Emergency
8122H	-14	14W	-30	3000K	blank no EM option
8122HIC	-23	23W	-35	3500K	EM adds Battery Pack
8124H	-30	30W	-40	4000K	
	-45	45W	-50	5000K	


Trims For 8122H, 8122HIC and 8124H

Wattage, lumen output, and CCT determined by housing choice. Check housing Ordering Guide.

8651



Haze Cone Reflector




ORDERING GUIDE Example: 8651HZ

Model #	Finish
8651	HZ Haze

8652




Haze Reflector with White Baffle




ORDERING GUIDE Example: 8652WH

Model #	Finish
8652	WH White

8653



Haze Reflector with White Baffle with lens




ORDERING GUIDE Example: 8653WH

Model #	Finish
8653	WH White

8655



Haze Cone Reflector with Wall Wash




ORDERING GUIDE Example: 8655WH

Model #	Finish
8655	WH White

6" LED High Output Housing



- 120V-277V Universal Housing
- Dimmable TRIAC, 10-100% And 0-10V DC Dimming
- 50,000 Hours Projected Life
- 3000K | 4000K | 5000K | 80 CRI
- 50W | 3438 lms 60W | 4265 lms
- 70W | 4921 lms 90W | 5798 lms
- cULus Listed for damp location
- 5 Year Limited Warranty

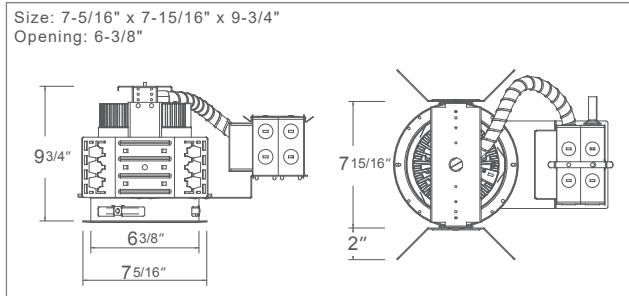

ORDERING GUIDE


Example: 8162H-50-30-EM

Housing	Wattage	Color Temp	Emergency
8162H	-50 50W	-30 3000K	blank no EM option
	-60 60W	-40 4000K	EM adds Battery Pack
	-70 70W	-50 5000K	
	-90 90W		

Trims For 8162H

Wattage, lumen output, and CCT determined by housing choice. Check housing Ordering Guide.

8656

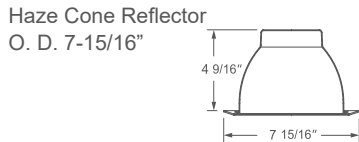


ORDERING GUIDE

Example: 8656HZ

Model #	Finish
8656	HZ Haze

8096B


Optional Two Piece Bar Hanger set
24" Joist Span

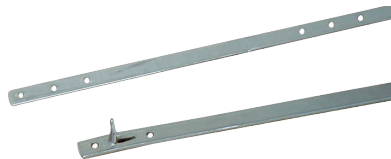

8" LED High Output Housing



- 120V-277V Universal Housing
- Dimmable TRIAC, 10-100% And 0-10V DC Dimming
- 50,000 Hours Projected Life
- 3000K | 4000K | 5000K | 80 CRI
- 50W | 3438 lms
- 60W | 4265 lms
- 70W | 4921 lms
- 90W | 5798 lms
- Energy Star Listed
- cULus Listed for damp location
- 5 Year Limited Warranty

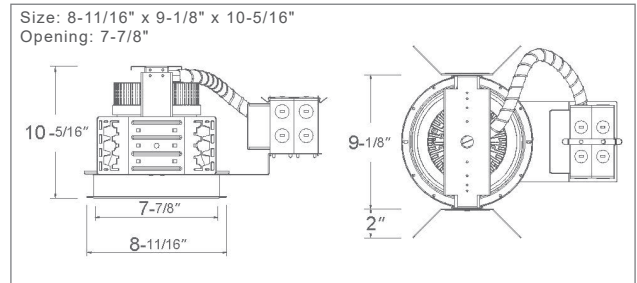

ORDERING GUIDE

Example: 8163H-50-30-EM

Housing	Wattage	Color Temp	Emergency
8163H	-50 50W	-30 3000K	blank no EM option
	-60 60W	-40 4000K	EM adds Battery Pack
	-70 70W	-50 5000K	
	-90 90W		


Trims For 8163H

Wattage, lumen output, and CCT determined by housing choice. Check housing Ordering Guide.

8676



Haze Cone Reflector
O. D. 9-7/16"



ORDERING GUIDE

Example: 8656HZ

Model #	Finish
8656	HZ Haze

8096B

Optional Two Piece Bar Hanger set
24" Joist Span




Specifications and dimensions subject to change.
Lumens are delivered unless otherwise noted.
See website for most current information.


8" LED Housings




- 120V-277V Universal Housing
- Dimmable TRIAC, 10-100% And 0-10V DC Dimming
- 50,000 Hours Projected Life
- 3000K | 3500K | 4000K | 5000K | ?? CRI
- 23W | 1950 lms 30W | 2720 lms 45W | 3640 lms
- 8125H & 8125HIC | Captive Bar Hangers Included
- Energy Star Listed – 3000K & 4000K only
- cCSAus Listed for damp location; select trim wet location
- 5 Year Limited Warranty

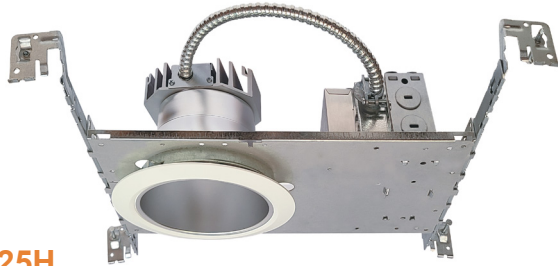


8125H
8" LED Frame-In

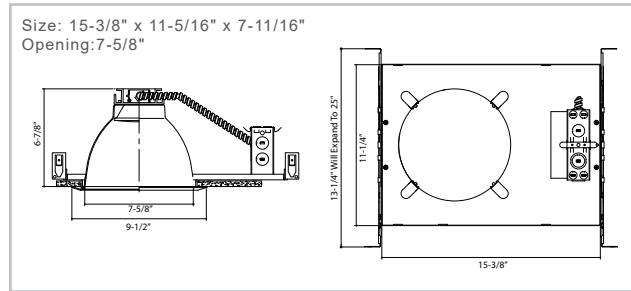

8125HIC
8" LED IC Airtight Frame-In

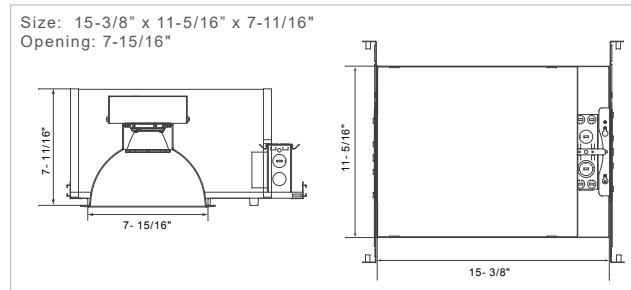

8126H
8" LED Architectural Housing

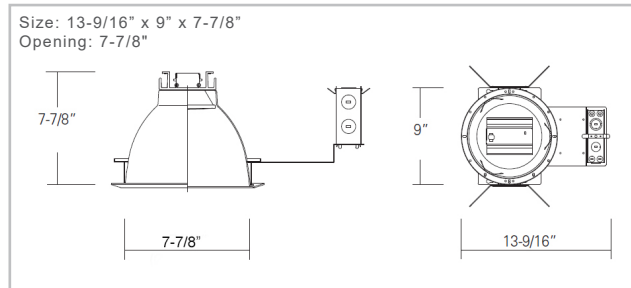

8096B

Optional Two Piece Bar
Hanger set
24" Joist Span



ORDERING GUIDE

Example: 8125H-23-40-EM

Model #	Wattage		CCT		Emergency
8125H	-23	23W	-30	3000K	blank no EM option
8125HIC	-30	30W	-35	3500K	EM adds Battery Pack
8126H	-45	45W	-40	4000K	
			-50	5000K	


Trims For 8125H, 8125HIC and 8126H

Wattage, lumen output, and CCT determined by housing choice. Check housing Ordering Guide.

8671




Haze Cone Reflector
O. D. 9-7/16"




ORDERING GUIDE Example: 8671HZ

Model #	Finish
8671	HZ Haze

8673



Haze Reflector
with lens
O. D. 9-7/16"



ORDERING GUIDE Example: 8673WH

Model #	Finish
8673	WH White

Non-IC, Architectural LED Retrofit












- 120V-277V Universal Housing
- Dimmable TRIAC, 10-100% And 0-10V DC Dimming
- 50,000 Hours Projected Life
- 3000K | 3500K | 4000K | 5000K | 80 CRI
- 15W | 1015 lms 20W | 1245 lms
- 30W | 1915 lms 40W | 2565
- Beam Angle: 8041 | 65° 8061 & 8081 | 60°
- Energy Star Listed
- cCSAus Listed for damp location
- 5 Year Limited Warranty
- IC / Non-IC New Construction Mounting Plates Available



8041
4" Aperture Non-IC, LED Retrofit

8061
6" Aperture Non-IC, LED Retrofit

8081
8" Aperture Non-IC, LED Retrofit

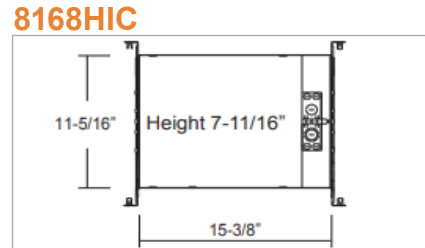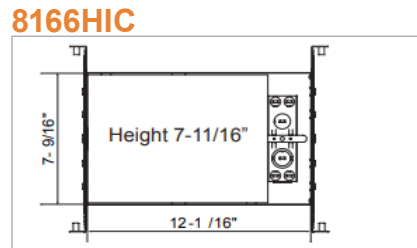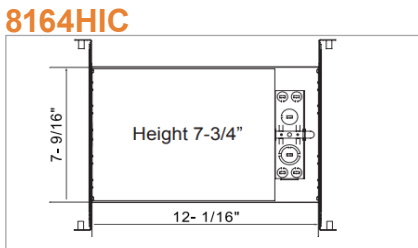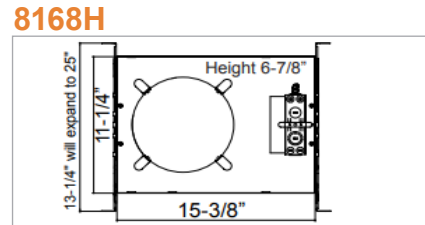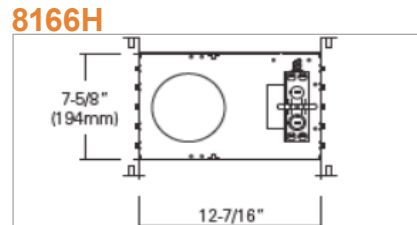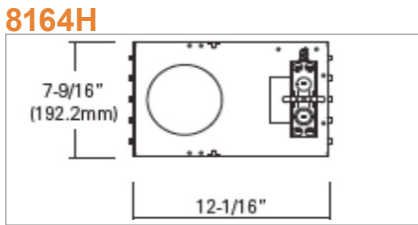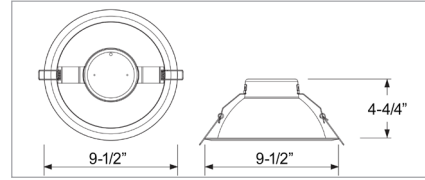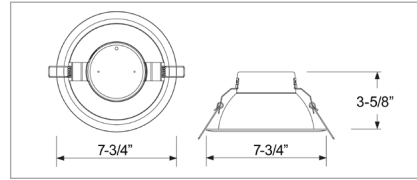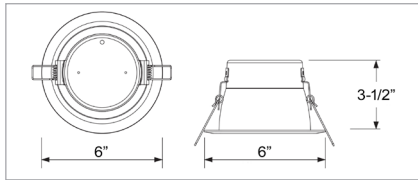

ORDERING GUIDE

Example: 8041-15-30-EM

Housing	Wattage	Source Lumens	Emergency
8041	-15 15W	-30 3000K	blank no EM option
8061	-20 20W	-35 3500K	EM adds Battery Pack
8081	-30 30W ¹	-40 4000K	
	-40 40W ²		

Specifications and dimensions subject to change. Lumens are delivered unless otherwise noted. See website for most current information.




3" LED IC Rated Housings




Housing	Trims (sold separately)	
<ul style="list-style-type: none"> • 120V • IC Rated for direct contact • 1-1/4" ceiling thickness adjustable 	<ul style="list-style-type: none"> • 3" Nominal Aperture • 50,000 Hour Project Life • 3000K 80 or 90 CRI • Dimmable TRIAC, 10-100% 	<ul style="list-style-type: none"> • cCSAus Listed for damp location • Housing: 1 Year Limited Warranty • LED Lamps: 5 Year Limited Warranty



8317H
3" LED IC Rated Frame-In

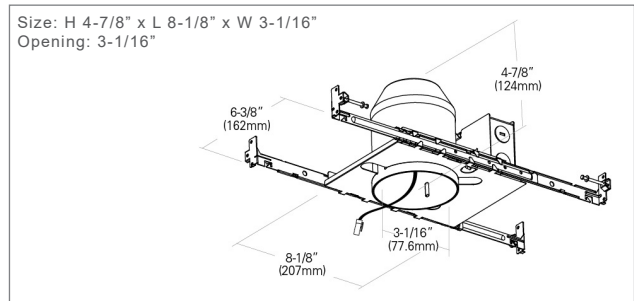

8317HR
3" LED IC Rated Remodel

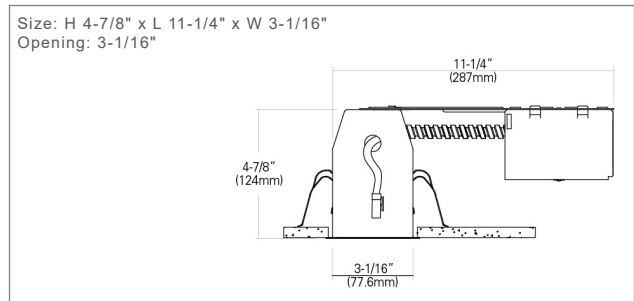

ORDERING GUIDE

Example: 8317H

Model #
8317H
8317HR

Trims For 8317H and 8317HR

8821-1



3" LED Recessed Baffle
10W | 650 lms
3000K | 80 CRI
120V
O.D. 3-3/4"

ORDERING GUIDE

Example: 8821-1-WH-3K

Model #	Finish	CCT
8821-1-	WH White	-3K 3000K

8822-1



3" LED Recessed Gimbal
10W | 650 lms
3000K | 80 CRI
120V
O.D. 3-3/4"

ORDERING GUIDE

Example: 8822-1-WH-3K

Model #	Finish	CCT
8822-1-	WH White	-3K 3000K

8823



3" Recessed Eyeball
8W | 600 lms
3000K | 90 CRI
120V
O.D. 3-5/8"

ORDERING GUIDE

Example: 8823WH

Model #	Finish
8823	WH White

8824



3" LED Retrofit Baffle
10W | 600 lms
3000K | 90 CRI
120V
O.D. 3-5/8"



ORDERING GUIDE

Example: 8824WH-90-3K

Model #	Finish	CRI	CCT
8824	WH White	-90	-3K 3000K

8825



3" LED Retrofit Gimbal
10W | 600 lms
3000K | 90 CRI
120V
O.D. 3-5/8"



ORDERING GUIDE

Example: 8825WH-90-3K

Model #	Finish	CRI	CCT
8825	WH White	-90	-3K 3000K


4" LED IC Airtight Housings




Housing <ul style="list-style-type: none"> • 120V • IC Rated for direct contact • 1" ceiling thickness adjustable 	Trims (sold separately) <ul style="list-style-type: none"> • 4" Nominal Aperture • 50,000 Hours Projected Life • 3000K or 4000K 80 or 90 CRI • Dimmable TRIAC, 10-100% 	<ul style="list-style-type: none"> • cCSAus Listed for damp location • Housing: 1 Year Limited Warranty • LED Lamps: 5 Year Limited Warranty
---	---	---



8215HA
4" LED IC Airtight Frame-In

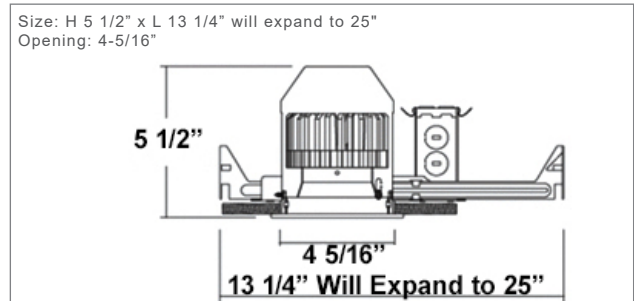

8215HRA
4" LED IC Airtight Remodel

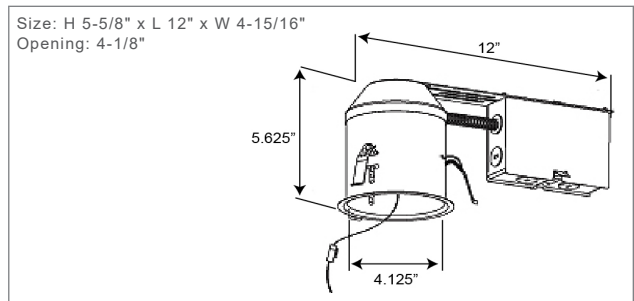

ORDERING GUIDE

Example: 8215HA

Model #	EM Option
8215HA	-EM adds EM Battery Backup (8215 housing only)
8215HRA	

Specifications and dimensions subject to change.
Lumens are delivered unless otherwise noted.
See website for most current information.

Trims For 8215HA and 8215HRA

8763



4" LED Recessed Reflector
10W | 600 lms
3000K or 4000K | 90 CRI
120V
O.D. 5"

ORDERING GUIDE

Example: 8763WH-90-3K

Model #	Finish	CRI	CCT
8763	BN Brushed Nickel	-90	-3K 3000K
	BK Black		-4K 4000K
	OB Oil Rubbed Bronze		
	CL Clear		
	WH White		

8769



4" LED Recessed Baffle
10W | 3000K
80CRI: 889 lms
90CRI: 710 lms
120V
O.D. 5"

ORDERING GUIDE

Example: 8769WH-90-3K

Model #	Finish	CRI	CCT
8769	BA Brushed Aluminum	-80	-3K 3000K
	BK Black ¹		
	OB Oil Rubbed Bronze ¹		
	WH White		

1 - Only available in -80 CRI

8770



4" LED Recessed Clear Reflector
10W | 710 lms
3000K | 90 CRI
120V
O.D. 5"

ORDERING GUIDE

Example: 8770CL-90-3K

Model #	Finish	CRI	CCT
8770	CL Clear	-90	-3K 3000K

8771



4" LED Recessed Gimbal
10W | 717 lms
3000K or 4000K | 90 CRI
120V
O.D. 5"

ORDERING GUIDE

Example: 8771WH-90-3K

Model #	Finish	CRI	CCT
8771	WH White	-90	-3K 3000K
			-4K 4000K

8773



4" LED Recessed Square
11W | 700 lms
3000K or 4000K | 90 CRI
120V
O.D. 5-1/8"

ORDERING GUIDE

Example: 8773WH-90-3K

Model #	Finish	CRI	CCT
8773	BN Brushed Nickel	-90	-3K 3000K
	OB Oil Rubbed Bronze		-4K 4000K
	WH White		

Specifications and dimensions subject to change.
Lumens are delivered unless otherwise noted.
See website for most current information.

6" LED IC Airtight Housings



LED Lamps Housings

Housing

- 120V
- IC Rated for direct contact
- 1-1/4" ceiling thickness adjustable

Trims (sold separately)


- 6" Nominal Aperture
- 50,000 Hours Project Life
- 3000K or 4000K | 80 CRI or 90 CRI
- Dimmable TRIAC, 10-100%

- cETLus Listed for damp location
- Housing: 1 Year Limited Warranty
- LED Lamps: 5 Year Limited Warranty




8117HA

6" LED IC Airtight Shallow Frame-In

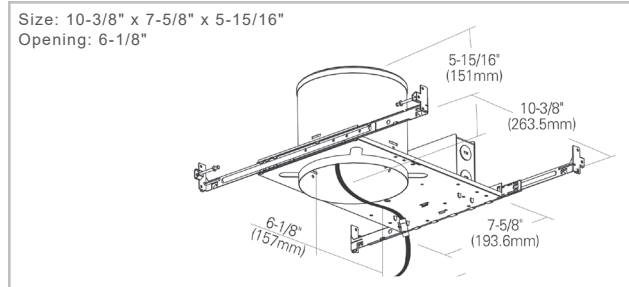

8117HRA

6" LED IC Airtight Shallow Remodel

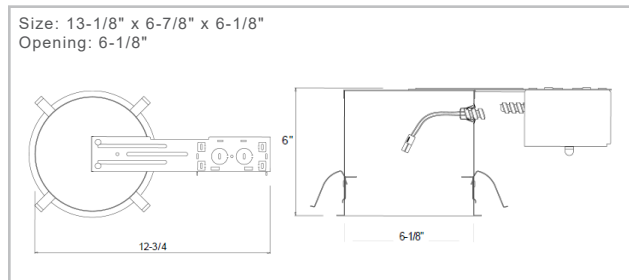

ORDERING GUIDE

Example: 8117HA

Model #	EM Option
8117HA	-EM adds EM Battery Backup (8117HA housing only)
8117HRA	

Trims For 8117HA and 8117HRA

8523



6" LED Recessed Baffle
12.5W | 850 lms
3000K or 4000K | 90 CRI
120V
O.D. 7-1/4"

ORDERING GUIDE

Example: 8523WH-90-3K

Model #	Finish	CRI	CCT
8523	BN	Brushed Nickel	-90 -3K 3000K
	BK	Black	-4K 4000K
	OB	Oil Rubbed Bronze	
	WH	White	

8562



6" LED Gimbal
13W | 900 lms
3000K | 80 CRI
120V
O.D. 7-3/4"

ORDERING GUIDE

Example: 8562WH-80-3K

Model #	Finish	CRI	CCT
8562	BN	Brushed Nickel	-80 -3K 3000K
	BK	Black	
	OB	Oil Rubbed Bronze	
	WH	White	

8563



6" LED Reflector
13W | 795 lms
3000K or 4000K | 90 CRI
120V
O.D. 7-1/4"

ORDERING GUIDE

Example: 8563WH-90-3K

Model #	Finish	CRI	CCT
8563	BN	Brushed Nickel	-90 -3K 3000K
	BK	Black	-4K 4000K
	OB	Oil Rubbed Bronze	
	CL	Clear	
	WH	White	

8568



6" LED Recessed Baffle
High Lumen Output
17W | 1240 lms
3000K or 4000K | 90 CRI
120V
O.D. 7-1/4"

ORDERING GUIDE

Example: 8568WH-90-3K

Model #	Finish	CRI	CCT
8568	BK	Black	-90 -3K 3000K
	OB	Oil Rubbed Bronze	-4K 4000K
	CL	Clear	
	WH	White	

* CL only available in -4K

4" Incandescent / LED Housings



Intertek LED Lamps Housings


Housing

- 120V - 60Hz
- Airtight; Non-IC/IC Available
- Frame-in: up to 1" ceiling thickness adjustable


Trims (sold separately)

- 4" Nominal Aperture
- Incandescent: 50W Max
- LED: Up to 900 lms
- LED: Dimmable TRIAC, 10-100%



- cETLus Listed for damp location
- Housing: 1 Year Limited Warranty
- LED Lamps: 5 Year Limited Warranty

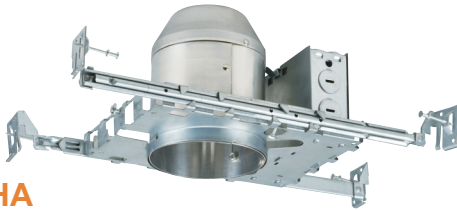


8201HA
4" Airtight Frame-In

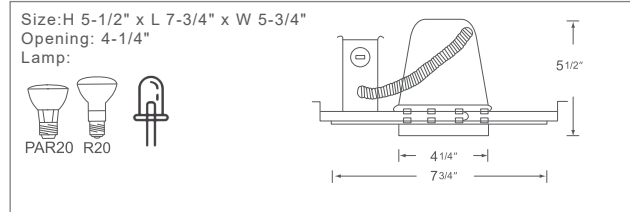

8201HRA
4" Airtight Remodel

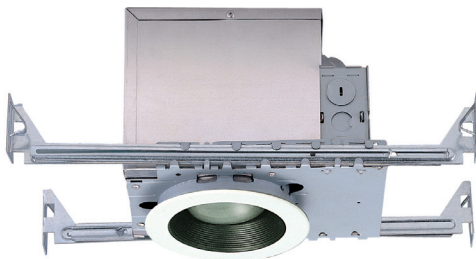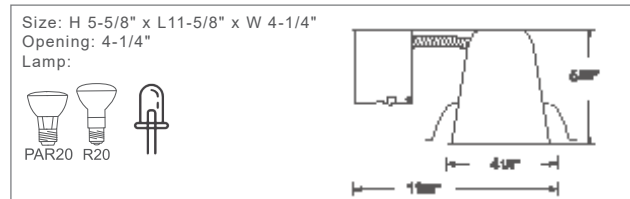

8202HA
4" IC Airtight Frame-In

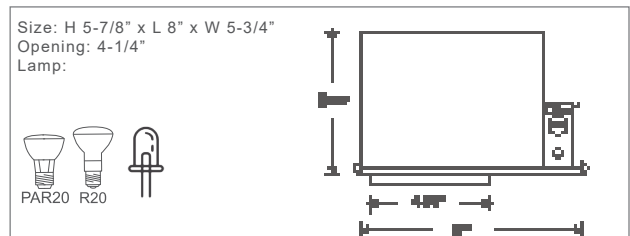

ORDERING GUIDE

Example: 8201HA

Model #

- 8201HA
- 8201HRA
- 8202HA

LED Trims For 8201HA, 8201HRA, and 8202HA

8756



WET LED Low-Profile Disk
12W | 730 lms
3000K | 90 CRI
120V
O.D. 5-7/8"

ORDERING GUIDE

Example: 8756WH-90-3K-R

Model #	Finish	CRI	CCT	Retrofit
8756	BN Brushed Nickel	-90	-3K	-R
	BK Black			
	OB Oil Rubbed Bronze			
	WH White			

8761



4" LED Retrofit Square
9W | 700 lms
3000K | 90 CRI
120V
O.D. 5"

ORDERING GUIDE

Example: 8761BN-90-3K

Model #	Finish	CRI	CCT
8761	BN Brushed Nickel	-90	-3K 3000K
	OB Oil Rubbed Bronze		

8763



WET 4" LED Recessed Reflector
10W | 600 lms
3000K or 4000K | 90 CRI
120V
O.D. 5"

ORDERING GUIDE

Example: 8763BN-90-3K

Model #	Finish	CRI	CCT	
8763	BN Brushed Nickel	-90	-3K 3000K	
	BK Black *			-4K 4000K
	OB Oil Rubbed Bronze			
	CL Clear			
	WH White			

* Only available in -4K

8765



4" LED Recessed Gimbal
8W, 3000K
90CRI: 600lms
O.D. 5"

ORDERING GUIDE

Example: 8765OB

Model #	Finish
8765	BN Brushed Nickel
	OB Oil Rubbed Bronze
	WH White

8768



4" LED Recessed Gimbal
10W | 900 lms
3000K | 90 CRI
120V
O.D. 5"

ORDERING GUIDE

Example: 8768OB

Model #	Finish
8768	BN Brushed Nickel
	OB Oil Rubbed Bronze
	WH White

8722



WET 4" LED Recessed Baffle w/ Lens
10W | 650 lms
4000K | 90 CRI
120V
O.D. 5-1/8"

ORDERING GUIDE

Example: 8722WH-90-4K

Model #	Finish	CRI	CCT
8722	WH White	-90	-4K 4000K

LED Trims For 8201HA, 8201HRA, and 8202HA

8769



4" LED Recessed Baffle
10W, 3000K
80 CRI: 889 lms
90 CRI: 710 lms
120V
O.D. 5"

ORDERING GUIDE

Example: 8769WH-90-3K

Model #	Finish	CRI	CCT
8769	BA Brushed Aluminum	-80	-3K 3000K
	BK Black *	-90	
	OB Oil Rubed Bronze *		
	WH White		

* Only available in 80 CRI

8770



4" LED Recessed Clear Reflector
10W | 710 lms
3000K | 90 CRI
120V
O.D. 5"

ORDERING GUIDE

Example: 8770CL-90-3K

Model #	Finish	CRI	CCT
8770	CL Clear	-90	-3K 3000K

8771



4" LED Recessed Gimbal
10W | 717 lms
3000K or 4000K | 90 CRI
120V
O.D. 5"

ORDERING GUIDE

Example: 8771WH-90-3K

Model #	Finish	CRI	CCT
8771	WH White	-90	-3K 3000K
			-4K 4000K

8773



4" LED Recessed Square
11W | 700 lms
3000K or 4000K | 90 CRI
120V
O.D. 5-1/8"

ORDERING GUIDE

Example: 8773WH-90-3K

Model #	Finish	CRI	CCT
8773	BN Brushed Nickel	-90	-3K 3000K
	OB Oil Rubbed Bronze		-4k 4000K
	WH White		

Incandescent Trims For 8201HA, 8201HRA, and 8202HA

8701



White Baffle
50W Max.
PAR20/R20
120V
O.D. 5"

ORDERING GUIDE

Example: 8701WH

Model #	Finish
8701	WH White

8702



WET Fresnel Shower Trim
Wet location listed
35W Max.
PAR20/R20
120V
O.D. 5"

ORDERING GUIDE

Example: 8702FS

Model #	Finish
8702	FS Fresnel Lens

8705



WET Albalite Shower Trim
Wet location listed
35W Max.
PAR20/R20
120V
O.D. 5"

ORDERING GUIDE

Example: 8705AL

Model #	Finish
8705	AL Alabite

6" LED High Lumen Housing



LED Lamps Housing



Housing

- 120-277V Universal - 60Hz
- IC Rated for direct contact
- Airtight Housing

Trims (sold separately)

- 6" Nominal Aperture
- 15W: 950 lms
- 20W: 1500 lms
- Dimmable TRIAC, 10-100%

- cETLus Listed for damp location
- Housing: 1 Year Limited Warranty
- LED Lamps: 5 Year Limited Warranty

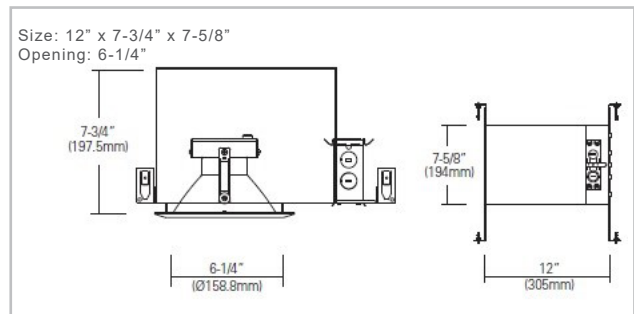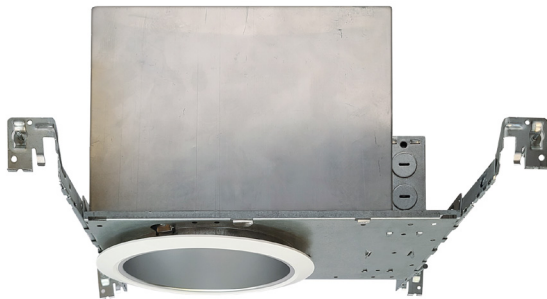

8116HIC

6" LED IC Airtight Frame-In

ORDERING GUIDE

Example: 8116HIC-15-EM

Model #	Wattage	Emergency
8116HIC	-15 : 15W 950 lms -20 : 20W 1500 lms	blank no EM added -EM adds Emergency Battery

LED Trims For 8116HIC

8570



6" LED Shower or Baffle Trim
15W or 20W
3000K or 4000K | 90 CRI
120V
O.D. 8"

ORDERING GUIDE

Example: 8570WH-15-3K

Model #	Finish	Wattage	CCT
8570	FS Frosted Shower *	-15	-3K 3000K
	WH White Baffle	-20	-4K 4000K

* FS Trim is Wet Location Listed

8571



6" LED Haze Open Reflector
15W or 20W
3000K or 4000K | 90 CRI
120V
O.D. 8"

ORDERING GUIDE

Example: 8571HZ-15-3K

Model #	Finish	Wattage	CCT
8571	HZ Haze	-15	-3K 3000K
		-20	-4K 4000K

8572



6" LED Eyeball
15W or 20W
3000K | 90 CRI
120V
O.D. 7-3/4"

ORDERING GUIDE

Example: 8572WH-15-3K

Model #	Finish	Wattage	CCT
8572	WH White	-15	-3K 3000K
		-20	

8573



6" LED Gimbal
15W or 20W
3000K | 90 CRI
120V
O.D. 7-3/4"

ORDERING GUIDE

Example: 8573WH-15-3K

Model #	Finish	Wattage	CCT
8573	WH White	-15	-3K 3000K
		-20	

6" Incandescent / LED Housings



LED Lamps Housings


Housing

- 120V - 60Hz
- IC Airtight
- Frame-in: up to 1-1/4" ceiling thickness adjustable


Trims (sold separately)

- 6" Nominal Aperture
- Incandescent: 75W Max
- LED: Up to 1240 lms
- LED: Dimmable TRIAC, 10-100%



- cETLus Listed for damp location
- Housing: 1 Year Limited Warranty
- LED Lamps: 5 Year Limited Warranty

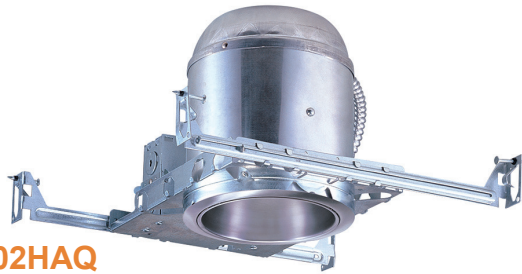


8102HAQ
6" IC Airtight Frame-In

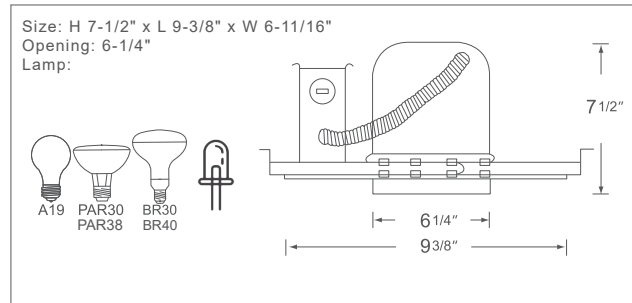

8102HRA
6" IC Airtight Remodel

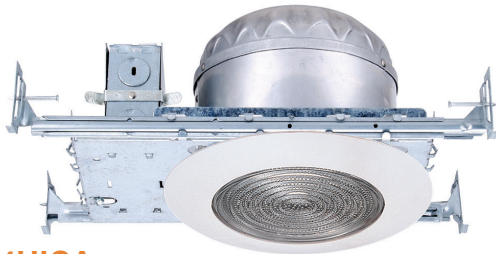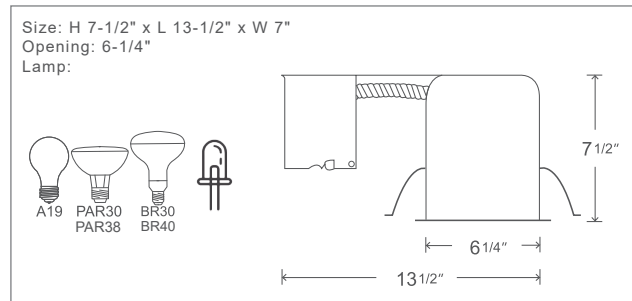

8104HICA
6" IC Airtight Shallow Frame-In

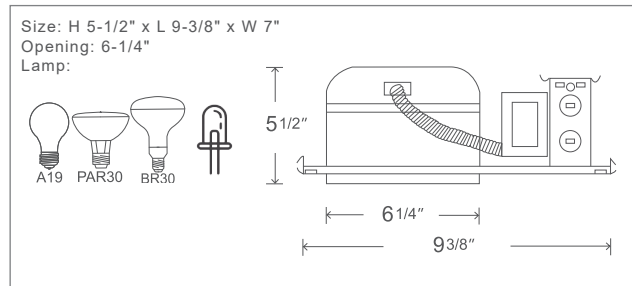

ORDERING GUIDE

Example: 8102HAQ

Model #

- 8102HAQ
- 8102HRA
- 8104HICA

LED Trims For 8102HAQ, 8102HRA, 8104HICA

8523



6" LED Recessed Baffle
12.5W | 850 lms
3000K or 4000K | 90 CRI
120V | O.D. 7-1/4"

8562



6" LED Gimbal
13W | 900 lms
3000K | 80 CRI
120V | O.D. 7-3/4"

8563



6" LED Reflector
13W | 795 lms
3000K or 4000K | 90 CRI
120V | O.D. 7-1/4"

8568



6" LED Recessed Baffle
High Lumen Output
17W | 1240 lms
3000K or 4000K | 90 CRI
120V | O.D. 7-1/4"

8564



6" LED Retrofit Eyeball
12W | 900 lms
3000K | 90 CRI
120V | O.D. 7-1/4"

8567



6" LED Eyeball
15W | 1200 lms
3000K | 90 CRI
120V | O.D. 7-1/4"

8538



6" LED Flat Lens Disk
15W | 850 lms
3000K or 4000K | 90 CRI
120V | O. D. 7-3/8"

ORDERING GUIDE

Example: 8523WH-90-3K

Model #	Finish	CRI	CCT
8523	BN	Brushed Nickel	-90 -3K 3000K
	BK	Black	-4K 4000K
	OB	Oil Rubbed Bronze	
	WH	White	

ORDERING GUIDE

Example: 8562WH-80-3K

Model #	Finish	CRI	CCT
8562	BN	Brushed Nickel	-80 -3K 3000K
	BK	Black	
	OB	Oil Rubbed Bronze	
	WH	White	

ORDERING GUIDE

Example: 8563WH-90-3K

Model #	Finish	CRI	CCT
8563	BN	Brushed Nickel	-90 -3K 3000K
	BK	Black	-4K 4000K
	OB	Oil Rubbed Bronze	
	CL	Clear	
	WH	White	

ORDERING GUIDE

Example: 8568WH-90-3K

Model #	Finish	CRI	CCT
8568	BK	Black	-90 -3K 3000K
	OB	Oil Rubbed Bronze	-4K 4000K
	CL	Clear *	
	WH	White	

* CL only available in -4K

ORDERING GUIDE

Example: 8564WH-90-3K

Model #	Finish	CRI	CCT
8564	BN	Brushed Nickel	-90 -3K 3000K
	WH	White	

ORDERING GUIDE

Example: 8567WH-90-3K

Model #	Finish	CRI	CCT
8567	BN	Brushed Nickel	-90 -3K 3000K
	WH	White	

ORDERING GUIDE

Example: 8538WH-90-3K-R

Model #	Finish	CRI	CCT	Retrofit
8538	BN	Brushed Nickel	-90 -3K	-R
	BK	Black	-4K	
	OB	Oil Rubbed Bronze		
	WH	White		

LED Trims For 8102HAQ, 8102HRA, 8104HICA

8556



6" LED Low-Profile Disk
15W | 1000 lms
3000K or 4000K | 90 CRI
120V | O.D. 7-3/8"

ORDERING GUIDE

Example: 8556WH-90-3K-R

Model #	Finish	CRI	CCT	Retrofit
8556	BN Brushed Nickel *	-90	-3K	-R
	WH White			

8569



6" High Lumen Flat Lens Disk
15W | 1240 lms
120V | O.D. 7-3/8"

ORDERING GUIDE

Example: 8769WH-80-3K-R

Model #	Finish	CRI	CCT	Retrofit
8769	WH White	-80	-3K	-R

Incandescent Trims For 8102HAQ, 8104HICA

8502



6" Lexan Shower Trim w/
Fresnel Lens
White Metal Trim
Wet location listed
60W Max. A19

ORDERING GUIDE

Example: 8502FS

Model #	Finish
8502	FS Fresnel Lens

8504



6" Black Baffle
75W Max.
PAR30/BR30
O. D. 8"

ORDERING GUIDE

Example: 8504BK

Model #	Finish
8504	BK Black

8505



6" Lexan Shower Trim w/ Flat Opal
Albalite Lens
White Trim Ring
Wet location listed
60W Max. A19

ORDERING GUIDE

Example: 8505AL

Model #	Finish
8505	AL Albalite Lens
	AL-BR Albalite Lens w/ Bracket
	AL-M Albalite Lens w/ Metal Ring

8511



6" White Baffle
75W Max.
PAR30/BR30
O. D. 8"

ORDERING GUIDE

Example: 8511WH

Model #	Finish
8511	WH White

8519



6" Airtight White Baffle Cone
150W Max.
PAR30/BR30/A19
PAR38/BR40
O. D. 8"

ORDERING GUIDE

Example: 8519WH

Model #	Finish
8519	WH White

8544



6" Open Trim
75W Max.
PAR30/BR30
O. D. 8"

ORDERING GUIDE

Example: 8544WH



Model #	Finish
8544	WH White

Specifications and dimensions subject to change.
Lumens are delivered unless otherwise noted.
See website for most current information.

4" LED Retrofit Kit



- 120V - 60Hz
- 3000K, 4000K | 90 CRI
- Dimmable TRIAC, 10-100%
- 11W | 650 lms
- Aluminum Construction with Frosted Lens
- cCSAus Listed for wet location
- Energy Star Listed
- CEC JA8 compliant
- LED Lamps: 5 Year Limited Warranty

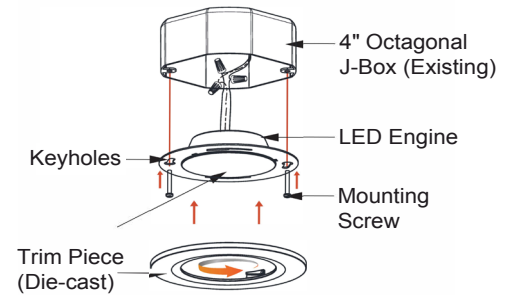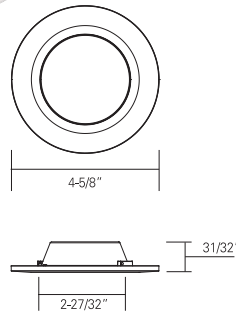

ORDERING GUIDE Example: 8708WH-3K


Model	Finish	CCT
8708	WH White	-3K 3000
		-4K 4000

Accessory	Finish
4-JBR-BK	Black Trim Ring for 8708
4-JBR-BN	Brushed Nickel Trim Ring for 8708

4" LED Retrofit Trim, 2.25" Aperture



- 120V - 60Hz
- 3000K, 4000K | 90 CRI
- Dimmable TRIAC, 10-100%
- 11W | 650 lms
- Aluminum Construction with Frosted Lens
- cCSAus Listed for wet location
- Energy Star Listed
- CEC JA8 Compliant
- LED Lamp: 5 Year Limited Warranty

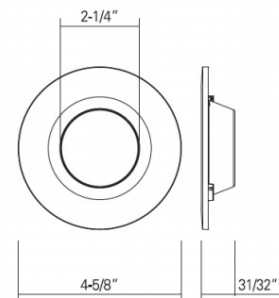

ORDERING GUIDE Example: 8711WH-90-3K


Model	Finish	CRI	CCT
8711	WH White	-90	-3K 3000
			-4K 4000

Specifications and dimensions subject to change.
Lumens are delivered unless otherwise noted.
See website for most current information.


4" and 6" LED Ultra-Thin Light



- 120V - Ultra Slim Profile
- Durable Aluminum Construction
- Frosted Acrylic Lens
- 120° Beam Angle
- 4"-8742-2: 670 lms
- 6"-8542-2: 884 lms
- Dimmable TRIAC, 10-100%
- cETLus Listed for wet location
- Energy Star Listed
- LED lamps: 5 Year Limited Warranty

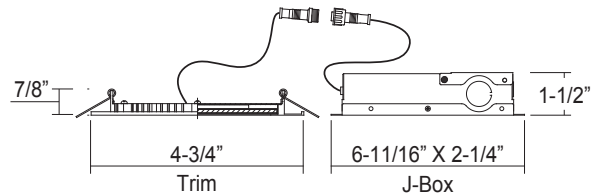

8742-2
4" Ultra-Thin Light

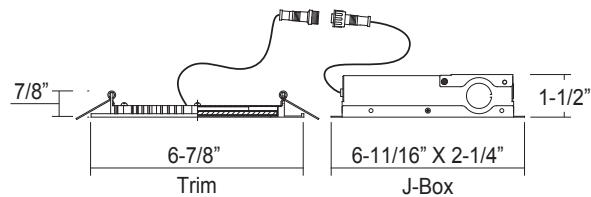


8542-2
6" Ultra-Thin Light

PF-4 and PF-6

4" or 6" Mounting Plate Accessory

- New Construction Mounting Plate
- Durable aluminum construction
- Includes four 24" bar hanger



ORDERING GUIDE


Example: 8742-2WH-3K

Model	Finish	CCT
8742-2 4" Ultra-Thin Light	WH White	-3K 3000K
8542-2 6" Ultra-Thin Light		-4K 4000K
Accessory		
PF-4	4" Mounting Plate	
PF-6	6" Mounting Plate	


6" and 8" LED Ultra-Thin Light



- 120V - Ultra Slim Profile
- Durable Aluminum Construction
- Frosted Acrylic Lens
- 120° Beam Angle
- 3"-8842: 350 lms
- 8"-8642: 1150 lms
- Dimmable TRIAC, 10-100%
- cETLus Listed for wet location
- Energy Star Listed
- 5 Year Limited Warranty
- LED Lamps: 5 Year Limited Warranty

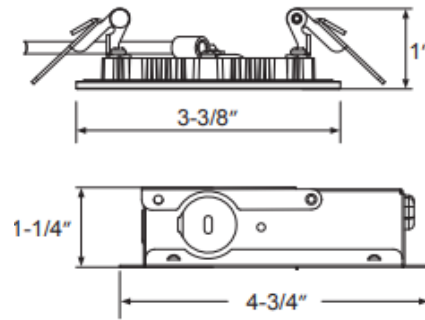

8842
3" Ultra-Thin Light

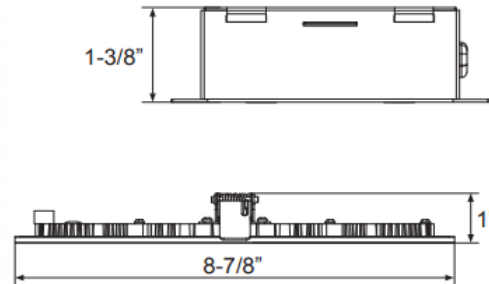


8642
8" Ultra-Thin Light

PF-3 and PF-4

3" or 4" Mounting Plate Accessory

- New Construction Mounting Plate
- Durable aluminum construction
- Includes four 24" bar hanger



ORDERING GUIDE

Example: 8842WH-3K


	Model	Finish	CCT
8842	3" Ultra-Thin Light	WH White	-3K 3000K
8642	8" Ultra-Thin Light		-4K 4000K
Accessory			
	PF-3	3" Mounting Plate	

Specifications and dimensions subject to change.
Lumens are delivered unless otherwise noted.
See website for most current information.

4" IC Rated, LED Retrofit & New Construction J-Box Downlight



- 120V - 60Hz
- 3000K, 4000K | 90 CRI
- Dimmable TRIAC, 10-100%
- 12.7W | 760 lms
- Aluminum Construction with Frosted Lens
- IC Rated
- cCSAus Listed for wet location
- Energy Star Listed
- CEC JA8 Compliant
- LED Lamps: 5 Year Limited Warranty

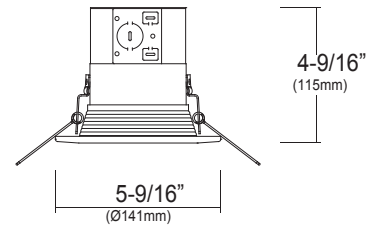


Ceiling Cut-out: 4-3/8"

ORDERING GUIDE

Example: 8775WH-90-3K

Model	Finish	CRI	CCT
8775	WH White	-90 90 CRI	-3K 3000 -4K 4000
Accessory			
	PF-4	4" Mounting Plate	




Specifications and dimensions subject to change. Lumens are delivered unless otherwise noted. See website for most current information.

6" IC Rated, LED Retrofit & New Construction J-Box Downlight



- 120V - 60Hz
- 3000K, 4000K | 90 CRI
- Dimmable TRIAC, 10-100%
- 21W | 1314 lms
- Aluminum Construction with Frosted Lens
- IC Rated
- cCSAus Listed for wet location
- Energy Star Listed
- CEC JA8 Compliant
- LED Lamps: 5 Year Limited Warranty

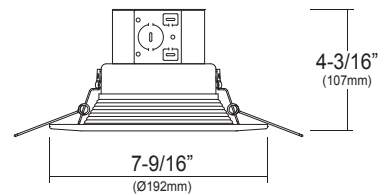


Ceiling Cut-out: 5-7/8"

ORDERING GUIDE

Example: 8545WH-90-3K

Model	Finish	CRI	CCT
8545	WH White	-90 90 CRI	-3K 3000 -4K 4000
Accessory			
	PF-6		6" Mounting Plate




Specifications and dimensions subject to change.
Lumens are delivered unless otherwise noted.
See website for most current information.

4" IC Rated, LED Recessed Adjustable Gimbal J-Box Downlight




- 120V - 60Hz
- 3000K | 90 CRI
- Dimmable TRIAC, 10-100%
- 360° Rotational Axis Point
- 11.5W | 730 lms
- Aluminum Construction
- IC Rated
- cCSAus Listed for wet location
- Energy Star Listed
- CEC JA8 Compliant
- LED Lamps: 5 Year Limited Warranty

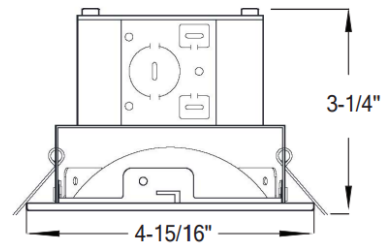

ORDERING GUIDE

Example: 8776WH-90-3K

Model	Finish	CRI	CCT
8776	WH White	-90 90 CRI	-3K 3000K
Accessory			
PF-4		4" Mounting Plate	



5" / 7" Slim Round Disk



- 120V - 60Hz
- 3000K, 4000K | 90 CRI
- Dimmable TRIAC, 10-100%
- Steel housing with plastic lens
- 8739: 5-5/8" x 1" | 12W | 722 lms
- 8536: 7" x 1" | 14W | 920 lms
- Energy Star Listed
- CSAus Listed for wet location
- 5 Year Limited Warranty



Oil Rubbed Bronze (OB)



White (WH)



Black (BK)


ORDERING GUIDE Example: 8536WH-90-3K-R

Model	Finish	CRI	CCT	Retrofit
8739	BK Black	-90	-3K 3000	blank no retrofit option
8536	BN Brushed Nickel		-4K 4000	-R adds retrofit
	OB Oil Rubbed Bronze			
	WH White			

7" Slim Round Disk



- 120V - 60Hz
- 3000K | 80 CRI
- Dimmable TRIAC, 10-100%
- Steel housing with plastic lens
- 7" x 1" | 14W | 1050 lms
- Energy Star Listed
- CSAus Listed for wet location
- 5 Year Limited Warranty

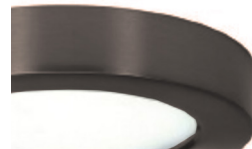

Oil Rubbed Bronze (OB)



White (WH)



Black (BK)

ORDERING GUIDE Example: 8539BK-80-3K-R


Model	Finish	CRI	CCT	Retrofit
8539	BK Black	-80	-3K 3000	blank no retrofit option
	BN Brushed Nickel			-R adds retrofit
	OB Oil Rubbed Bronze			
	WH White			

Specifications and dimensions subject to change.
Lumens are delivered unless otherwise noted.
See website for most current information.

5" / 7" Square Ceiling Mount



- 120V - 60Hz
- 3000K, 4000K | 90 CRI
- Dimmable TRIAC, 10-100%
- Steel construction with plastic lens
- 8548: 7-1/4" x 1-1/4" | 15W | 907 lms
- 8748: 4-15/16" x 9/16" | 10W | 625 lms
- Energy Star Listed
- cCSAus Listed for wet location
- 5 Year Limited Warranty

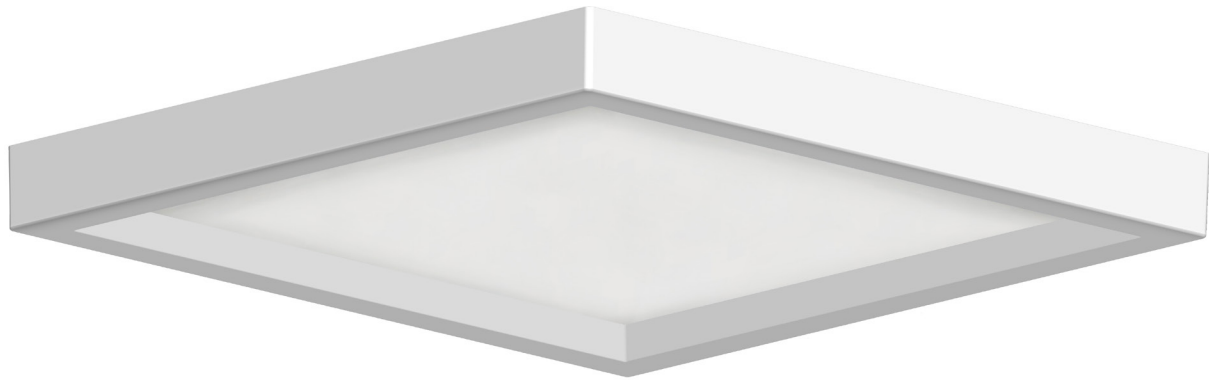

White (WH)



Black (BK)



Brushed Nickel (BN)



Oil Rubbed Bronze (OB)

ORDERING GUIDE

Example: 8538BK-90-3K-R

Model	Finish		CRI	CCT	
8748	BK	Black *	-90	-3K 3000	
8548	BN	Brushed Nickel		-4K 4000	
	OB	Oil Rubbed Bronze			
	WH	White			

* - Only available for 8548

4" Low-Profile Disk



- 120V - 60Hz
- 3000K | 90 CRI
- Dimmable TRIAC, 10-100%
- Aluminum housing with polycarbonate lens
- 5-7/8" x 1-1/16" | 12W | 730 lms
- Energy Star Listed
- cCSAus Listed for wet location
- 5 Year Limited Warranty



Brushed Nickel (BN)

Black (BK)



White (WH)



Oil Rubbed Bronze (OB)

ORDERING GUIDE

Example: 8756BN-90-3K-R

Model	Finish	CRI	CCT	Retrofit
8756	BN Brushed Nickel	-90	-3K 3000	blank no retrofit option
	BK Black			-R adds retrofit
	OB Oil Rubbed Bronze			
	WH White			

6" Low-Profile Disk



- 120V - 60Hz
- 27000K, 3000K, 4000K, 5000K
- 90 CRI
- Dimmable TRIAC, 0-100%
- Steel housing with polycarbonate lens
- 7-3/8" x 1-1/4" | 15W | 899 lms
- Energy Star Listed
- cCSAus Listed for wet location
- JA8/Title 24 Compliant
- 5 Year Limited Warranty



White (WH)



Black (BK)



Brushed Nickel (BN)

ORDERING GUIDE

Example: 8556BN-90-3K-R

Model	Finish	CRI	CCT	Retrofit
8556	BN Brushed Nickel *	-90	-27K 27000	blank no retrofit option
	BK Black		-3K 3000	-R adds retrofit
	WH White		-4K 4000	
			-5K 5000	

* Available in -3K or -4K only

Specifications and dimensions subject to change. Lumens are delivered unless otherwise noted. See website for most current information.

6" Low-Profile Closet Light



- 120V - 60Hz
- 3000K | 90 CRI
- Dimmable TRIAC, 10-100%
- Aluminum Construction
- 7-3/8" x 1-3/8" | 15W | 900 lms
- Energy Star Listed
- CSAus Listed for wet location
- JA8/Title 24 Compliant
- 5 Year Limited Warranty



ORDERING GUIDE Example: 8556WH-S-90-3K

Model	Finish	Sensor	CRI	CCT
8556	WH White	-S Sensor	-90 90 CRI	-3K 3000K

6" LED, CCT Selectable, Low-Profile Disk



- 120V - 60Hz
- Color Selectable | 90 CRI
- Dimmable TRIAC, 10-100%
- Aluminum Construction
- 7-3/8" x 1-1/4"
- Energy Star Listed
- CSAus Listed for wet location
- JA8/Title 24 Compliant
- 5 Year Limited Warranty



Adjusted Color of Light with Intrgrated Switch

- SOFT WHITE (3000K)
- BRIGHT WHITE (4000K)
- DAYLIGHT (5000K)

ORDERING GUIDE Example: 8557WH-90-345

Model	Finish	CRI	CCT	Retrofit
8557	WH White	-80 80 CRI	-345 CCT Selectable for 3000K, 4000K, 5000K	blank no retrofit option -R adds retrofit

7" Flat Lens Disk



- 120V - 60Hz
- 3000K, 4000K | 90 CRI
- Dimmable TRIAC, 10-100%
- Steel housing with plastic lens
- 7-3/8" x 1" | 15W | 835 lms
- Energy Star Listed
- CSAus Listed for wet location
- JA8/Title 24 Compliant
- 5 Year Limited Warranty



White (WH)



Oil Rubbed Bronze (OB)



Brushed Nickel (BN)



Black (BK)

ORDERING GUIDE

Example: 8538BK-90-3K-R

Model	Finish	CRI	CCT	Retrofit
8538	BK Black	-90	-3K 3000	blank no retrofit option
	BN Brushed Nickel		-4K 4000	-R adds retrofit
	OB Oil Rubbed Bronze			
	WH White			

7" High Lumen Flat Lens Disk



- 120V - 60Hz
- 3000K, 4000K | 90 CRI
- Dimmable TRIAC, 10-100%
- Steel housing with plastic lens
- 7-3/8" x 1" | 15W | 1240 lms
- Energy Star Listed
- CSAus Listed for wet location
- 5 Year Limited Warranty



White (WH)

ORDERING GUIDE

Example: 8569WH-80-3K-R



Model	Finish	CRI	CCT	Retrofit
8569	WH White	-80	-4K 4000	blank no retrofit option
				-R adds retrofit

Specifications and dimensions subject to change.
 Lumens are delivered unless otherwise noted.
 See website for most current information.

9" LED Low-Profile Disk Light



- 120V - 60Hz
- 3000K, 4000K | 90 CRI
- Dimmable TRIAC, 10-100%
- Aluminum Construction
- 9-1/2" x 1-1/4" | 30W | 2085 lms
- Energy Star Listed
- CSAus Listed for wet location
- JA8/Title 24 Compliant
- 5 Year Limited Warranty

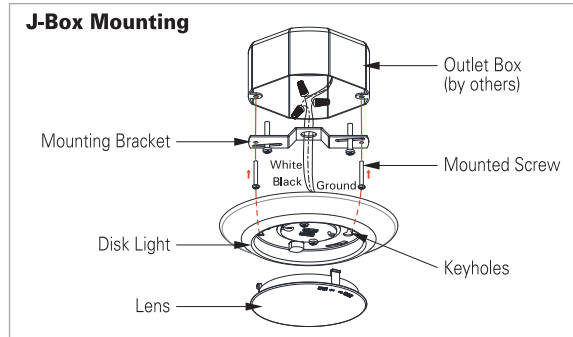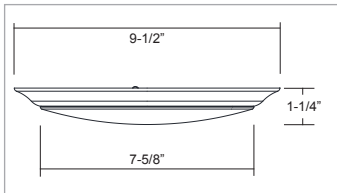

ORDERING GUIDE Example: 8554WH-90-3K

Model	Finish	CRI	CCT
8554	WH White	-90 90 CRI	-3K 3000 -4K 4000

Specifications and dimensions subject to change.
Lumens are delivered unless otherwise noted.
See website for most current information.

Recessed Lighting Accessories

8096A

Nail-Less Bar Hanger



8096B

Two Piece Bar Hanger set
24" Joist Span



8091A

Multi-Channel Bracket



Mounting Plate

PF-3 - 3" Mounting Plate

PF-4 - 4" Mounting Plate

PF-6 - 6" Mounting Plate



8097A

V-Spring



8098A

Coil Spring



FF109-300

One hour fire rated light
cover, regular



FF109-350

One hour fire rated light
cover, large




FF109X

Two hour fire rated light
cover, regular



Wall / Ceiling Mount

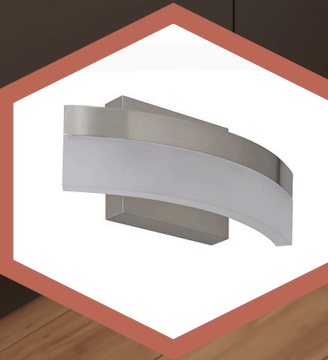

Wall Mount / Ceiling Mount Lighting Overview



4319
Edge-Lit LED Ribbon
Ceiling Mount
Page 107



4506
Edge-Lit LED Ribbon
Wall Mount
Page 107



4905
Edge-Lit LED Ribbon
Wall Mount
Page 107



8739, 8536, 8539
5", 7" Slim Round Disk
Ceiling Mount
Page 108



4350
11", 13", 15" LED
Ceiling Mount
Page 109



4325D-1-30
12" LED Ceiling Mount or
Wall Mount
Page 109



4326D-1-30
14" LED Ceiling Mount or
Wall Mount
Page 109



4327D-1-30
16" LED Ceiling Mount or
Wall Mount
Page 109



8748, 8548
4", 6" Low-Profile Square
Ceiling Mount
Page 110



4328-1, 4329-1, 4330-1
11", 13", 15" LED Square
Ceiling Mount
Page 111




4313-1, 4314-1, 4318-1
Flush Round
Ceiling Mount
Page 112



4345-30
Flush Round
Ceiling Mount
Page 112



4340
Flush Round LED
Ceiling Mount
Page 113



4715
11" Wet Location
Ceiling Mount
Page 114



4347
11", 13", 15" Dome
Ceiling Mount
Page 114

Wall Mount / Ceiling Mount Lighting Overview



4348
11", 13" Ceiling Mount
Page 115



4333, 4334, 4335
11", 13", 15" Dome
Ceiling Mount
Page 115



8756, 8556
4", 6" Low-Profile Disk Light
Page 116



8556-S
6" LED Low-Profile Closet Light
Page 117



8557
6" LED Low-Profile Disc Light,
CCT Selectable
Page 117



8538, 8569
7" Flat Lens Disk
Page 118



8554
9" LED High Lumen Disk
Page 119



4336, 4337, 4338
12", 14", 16" Dome
Ceiling Mount
Page 120



4320, 4322
11", 14" Square Dome
Ceiling Mount
Page 120



4503-30
8" LED Wall Sconce
Page 121



4505-30
12" Half-Circle Wall Sconce
Page 121



4404-30
LED Indoor Wall Sconce
Page 122

Warranty Information



Integrated LED Lights



Other Components



Edge-Lit LED Ribbon

- 120V - 60Hz
- 3000K | 80 CRI
- Dimmable TRIAC, 10-100%
- Metal construction with acrylic diffuser
- 4319: 15-3/4" x 4-1/8" | 25W | 1450 lms
- 4506: 10" x 4-1/8" x 3-1/4" | 9W | 500 lms
- 4905: 24" x 4-1/8" x 3-5/8" | 22W | 1500 lms
- cETLus Listed for damp location
- 5 Year Limited Warranty



4319



4506



4905

WALL MOUNT / CEILING MOUNT

ORDERING GUIDE Example: 4319BN


Model	Finish			
4319	BN	Brushed Nickel		
4506				Example: 4905BN-24
Model	Finish		Length	
4905	BN	Brushed Nickel	-24	24"

Specifications and dimensions subject to change.
 Lumens are delivered unless otherwise noted.
 See website for most current information.

5" / 7" Slim Round Disk



- 120V - 60Hz
- 3000K, 4000K | 90 CRI
- Dimmable TRIAC, 10-100%
- Steel housing with plastic lens
- 8739: 5-3/4" x 1" | 12W | 722 lms
- 8536: 7" x 1" | 14W | 920 lms
- Energy Star Listed
- CSAus Listed for wet location
- 5 Year Limited Warranty



Oil Rubbed Bronze (OB)



White (WH)



Black (BK)



Brushed Nickel (BN)

ORDERING GUIDE

Example: 8739WH-90-3K

Model	Finish	CRI	CCT	Retrofit
8739	BK Black	-90	-3K 3000	blank no retrofit option
8536	BN Brushed Nickel			-R adds retrofit
	OB Oil Rubbed Bronze			
	WH White			

* 8536BK-4K not available

7" Slim Round Disk



- 120V - 60Hz
- 3000K | 80 CRI
- Dimmable TRIAC, 10-100%
- Steel housing with plastic lens
- 7" x 1" | 14W | 1050 lms
- Energy Star Listed
- CSAus Listed for wet location
- 5 Year Limited Warranty



Oil Rubbed Bronze (OB)



White (WH)



Black (BK)



Brushed Nickel (BN)

ORDERING GUIDE

Example: 8539BK-80-3K

Model	Finish	CRI	CCT	Retrofit
8539	BK Black	-80	-3K 3000	blank no retrofit option
	BN Brushed Nickel			-R adds retrofit
	OB Oil Rubbed Bronze			
	WH White			

Specifications and dimensions subject to change.
Lumens are delivered unless otherwise noted.
See website for most current information.

11" / 13" / 15" Flat Lens Thin Profile



- 120V - 60Hz
- 3000K or 4000K | 90 CRI
- Dimmable TRIAC, 10-100%
- Steel construction with acrylic diffuser
- 11" W x 1" D | 15W | 1000 lms
- 13" W x 1" D | 20W | 1450 lms
- 15" W X 1" D | 30W | 1900 lms
- Energy Star Listed
- JA8/Title 24 Listed
- cETLus Listed for damp location
- 5 Year Limited Warranty



Brushed Nickel (BN)



White (WH)



Oil Rubbed Bronze (OB)

ORDERING GUIDE

Example: 4350WH-3K-15

Model	Finish	CCT	Size
4350	BN Brushed Nickel	-3K 3000K	-11 11"
	OB Oil Rubbed Bronze	-4K 4000K	-13 13"
	WH White		-15 15"

12" / 14" / 16" Round Ceiling Mount



- 120V - 60Hz
- 3000K | 80 CRI
- Steel construction with polycarbonate diffuser
- 4325D-1: 12-13/16" x 3-7/16" | 15W | 1138 lms
- 4326D-1: 13-13/16" x 3-13/16" | 23W | 1590 lms
- 4327D-1: 15-13/16" x 4" | 34W | 1900 lms
- Energy Star Listed
- CSAus Listed for wet location
- 5 Year Limited Warranty



Brushed Nickel (BN)



White (WH)



Oil Rubbed Bronze (OB)

ORDERING GUIDE


Example: 4325D-1-30-OB-EM

Model	Finish	EM Option
4325D-1-30	-BN Brushed Nickel	blank no EM option
4326D-1-30	-OB Oil Rubbed Bronze	-EM adds EM option
4327D-1-30	-WH White	

5" / 7" Square Ceiling Mount



- 120V - 60Hz
- 3000K, 4000K | 90 CRI
- Dimmable TRIAC, 10-100%
- Steel construction with acrylic diffuser
- 8548: 7-5/16" x 9/16" | 15W | 907 lms
- 8748: 4-15/16" x 9/16" | 10W | 625 lms
- Energy Star Listed
- cCSAus Listed for wet location
- 5 Year Limited Warranty

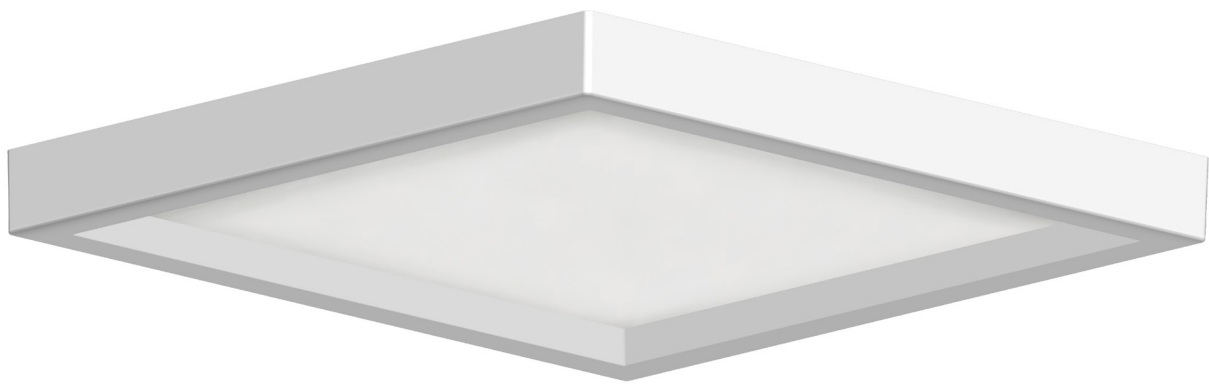

White (WH)



Black (BK)



Brushed Nickel (BN)



Oil Rubbed Bronze (OB)

ORDERING GUIDE Example: 8548WH-90-3K

Model	Finish	CRI	CCT
8748	BK Black *	-90	-3K 3000
8548	BN Brushed Nickel		-4K 4000
	OB Oil Rubbed Bronze		
	WH White		

* - Only available for 8548

Specifications and dimensions subject to change. Lumens are delivered unless otherwise noted. See website for most current information.

11" / 13" / 15" Square Ceiling Mount




- 120V - 60Hz
- 3000K or 4000K | 90 CRI
- Dimmable TRIAC, 10-100%
- Steel construction with acrylic diffuser
- 4328-1: 11" square | 15W | 1000 lms
- 4329-1: 13" square | 20W | 1200 lms
- 4330-1: 15" square | 30W | 1800 lms
- Low-profile 1-1/4" height
- Energy Star Listed
- JA8/Title 24 Compliant
- ETL Listed for damp location
- 5 Year Limited Warranty



Brushed Nickel (BN)



Oil Rubbed Bronze (OB)



White (WH)

WALL MOUNT / CEILING MOUNT

ORDERING GUIDE

Example: 4328-1BN-3K

Model	Finish		CCT	
4328-1	BN	Brushed Nickel	-3K	3000K
4329-1	OB	Oil Rubbed Bronze	-4K	4000K
4330-1	WH	White		

Specifications and dimensions subject to change.
Lumens are delivered unless otherwise noted.
See website for most current information.

Flush Round Ceiling Mount



- 120V - 60Hz
- 3000K | 80 CRI
- Dimmable TRIAC, 10-100%
- Steel construction with acrylic diffuser
- 4313-1: 11-13/16" x 3-7/16" | 15W | 1049 lms
- 4314-1: 14-5/8" x 4-13/16" | 23W | 1512 lms
- 4318-1: 17-11/16" x 4-3/16" | 34W | 1908 lms
- Energy Star Listed
- CSA Listed for damp location
- 5 Year Limited Warranty



Brushed Nickel (BN)



Oil Rubbed Bronze (OB)



White (WH)

ORDERING GUIDE

Example: 4314-1-30-OB-EM

Model	Finish		EM Option	
4313-1-30	-BN	Brushed Nickel	Blank	no EM option
4314-1-30	-OB	Oil Rubbed Bronze	-EM	add EM option
4318-1-30	-WH	White		

Flush Round Ceiling Mount



- 120V - 60Hz
- 3000K | 80 CRI
- Dimmable TRIAC, 10-100%
- Steel construction with acrylic diffuser
- 32" x 18" x 4" | 35W | 2600 lms
- Energy Star Listed
- cETLus Listed for damp location
- 5 Year Limited Warranty



Brushed Nickel (BN)



Oil Rubbed Bronze (OB)

ORDERING GUIDE

Example: 4345-30-OB

Model	Finish	
4345-30	-BN	Brushed Nickel
	-OB	Oil Rubbed Bronze


Flush Round Ceiling Mount



- 120V - 60Hz
- 3000K | 80 CRI
- Dimmable TRAIC, 10-100%
- Steel construction with acrylic diffuser
- 4340-30: 16-3/4"D x 4" H | 23W | 1600 lms
- cETLus Listed for damp location
- 5 Year Limited Warranty



Brushed Nickel (BN)

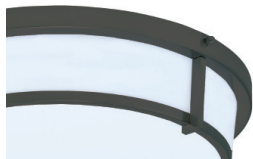

Oil Rubbed Bronze (OB)

WALL MOUNT / CEILING MOUNT

ORDERING GUIDE

Example: 4340BN

Model	Finish	
4340	BN	Brushed Nickel
	OB	Oil Rubbed Bronze

Specifications and dimensions subject to change.
Lumens are delivered unless otherwise noted.
See website for most current information.


11" Wet Location Ceiling Mount



- 120V - 60Hz
- 3000K | 80 CRI
- Polycarbonate housing and lens
- 11" x 3-1/2" | 17W | 800 lms
- cETLus Listed for wet location
- 5 Year Limited Warranty



Brushed Aluminum (BA)



Oil Rubbed Bronze (OB)



Black (BK)

ORDERING GUIDE

Example: 4715BA

Model	Finish	
4715	BA	Brushed Aluminum
	BK	Black
	OB	Oil Rubbed Bronze

11" / 13" / 15" Dome Ceiling Mount



- 120V - 60Hz
- 3000K | 80 CRI
- Dimmable TRIAC, 10-100%
- Steel construction with Alabaster Glass
- 11": 11-1/4" x 4-1/2" | 15W | 1100 lms
- 13": 13" x 5-1/4" | 20W | 1500 lms
- 15": 15" x 5-3/8" | 25W | 1800 lms
- Energy Star Listed
- cETLus Listed for damp location
- 5 Year Limited Warranty



Brushed Nickel (BN)



White (WH)



Oil Rubbed Bronze (OB)

ORDERING GUIDE

Example: 4347BN-11-3K

Model	Finish	Size	CCT
4347	BN	-11 11"	-3K 3000K
	OB	-13 13"	
	WH	-15 15"	

11" / 13" Ceiling Mount



- 120V - 60Hz
- 3000K | 80 CRI
- Dimmable TRIAC, 10-100%
- Steel construction with frosted glass
- 11": 11-1/2" x 3-3/8" | 15W | 950 lms
- 13": 13-3/8" x 4" | 25W | 1400 lms
- Energy Star Listed
- cETLus Listed for damp location
- 5 Year Limited Warranty



Brushed Nickel (BN)

ORDERING GUIDE

Example: 4348OB-13-3K

Model	Finish	Size	CCT
4348	BN Brushed Nickel	-11 11"	-3K 3000K
	OB Oil Rubbed Bronze	-13 13"	
	WH White		

11" / 13" / 15" Dome Ceiling Mount



- 120V - 60Hz
- 3000K | 93+ CRI
- Dimmable TRIAC, 10-100%
- Steel construction with frosted glass
- 4333: 11-5/16" x 5-11/16" | 15W | 940 lms
- 4334: 13-3/8" x 5-1/2" | 23W | 1368 lms
- 4335: 15" x 5-9/16" | 34W | 2050 lms
- Energy Star Listed
- cCSAus Listed for wet location
- 5 Year Limited Warranty



Oil Rubbed Bronze (OB)



White (WH)



Black (BK)



Brushed Nickel (BN)

ORDERING GUIDE

Example: 4333BN

Model	Finish	
4333	BN Brushed Nickel	
4334	OB Oil Rubbed Bronze	
4335	WH White	

Specifications and dimensions subject to change.
Lumens are delivered unless otherwise noted.
See website for most current information.

4" Low-Profile Disk



- 120V - 60Hz
- 3000K | 90 CRI
- Dimmable TRIAC, 10-100%
- Aluminum housing with polycarbonate lens
- 5-7/8" x 1-1/8" | 12W | 710 lms
- Energy Star Listed
- cCSAus Listed for wet location
- 5 Year Limited Warranty



White (WH)



Brushed Nickel (BN)



Black (BK)



Oil Rubbed Bronze (OB)

ORDERING GUIDE

Example: 8756BN-90-3K-R

Model	Finish	CRI	CCT	Retrofit
8756	BN Brushed Nickel	-90	-3K 3000	blank no retrofit option
	BK Black			-R adds retrofit
	OB Oil Rubbed Bronze			
	WH White			

6" Low-Profile Disk



- 120V - 60Hz
- 27000K, 3000K, 4000K, 5000K
- 90 CRI
- Dimmable TRIAC, 0-100%
- Steel housing with polycarbonate lens
- 7-3/8" x 1-1/4" | 15W | 899 lms
- Energy Star Listed
- cCSAus Listed for wet location
- JA8/Title 24 Compliant
- 5 Year Limited Warranty



White (WH)



Brushed Nickel (BN)



Black (BK)

ORDERING GUIDE

Example: 8556BN-90-3K-R

Model	Finish	CRI	CCT	Retrofit
8556	BN Brushed Nickel *	-90	-27K 2700	blank no retrofit option
	BK Black *		-3K 3000	-R adds retrofit
	WH White		-4K 4000	
			-5K 5000	

* Available in -3K or -4K only

6" Low-Profile Closet Light



- 120V - 60Hz
- 3000K | 90 CRI
- Dimmable TRIAC, 10-100%
- Aluminum Construction
- 7-3/8" x 1-3/8" | 15W | 900 lms
- Energy Star Listed
- CSAus Listed for wet location
- JA8/Title 24 Compliant
- 5 Year Limited Warranty



White (WH)

ORDERING GUIDE

Example: 8556WH-S-90-3K

Model	Finish	Sensor	CRI	CCT
8556	WH White	-S Sensor	-90 90 CRI	-3K 3000K

6" LED, CCT Selectable, Low-Profile Disk



- 120V - 60Hz
- Color Selectable | 90 CRI
- Dimmable TRIAC, 10-100%
- Aluminum Construction
- 7-3/8" x 1-3/8" | 15W | 900 lms
- Energy Star Listed
- CSAus Listed for wet location
- JA8/Title 24 Compliant
- 5 Year Limited Warranty



White (WH)

Adjusted Color of Light with Intrgrated Switch

- SOFT WHITE (3000K)
- BRIGHT WHITE (4000K)
- DAYLIGHT (5000K)

ORDERING GUIDE

Example: 8557WH-90-345

Model	Finish	CRI	CCT	Retrofit
8557	WH White	-90 90 CRI	-345 CCT Selectable for 3000K, 4000K, 5000K	blank no retrofit option -R adds retrofit

Specifications and dimensions subject to change. Lumens are delivered unless otherwise noted. See website for most current information.

7" Flat Lens Disk



- 120V - 60Hz
- 3000K, 4000K | 90 CRI
- Dimmable TRIAC, 10-100%
- Steel housing with plastic lens
- 7-3/8" x 1" | 15W | 993 lms
- Energy Star Listed
- CSAus Listed for wet location
- JA8/Title 24 Compliant
- 5 Year Limited Warranty



White (WH)



Oil Rubbed Bronze (OB)



Brushed Nickel (BN)



Black (BK)

ORDERING GUIDE

Example: 8538WH-90-3K

Model	Finish	CRI	CCT	Retrofit	
8538	BK Black	-90	-3K 3000	blank no retrofit option	
	BN Brushed Nickel			-4K 4000	-R adds retrofit
	OB Oil Rubbed Bronze				
	WH White				

7" High Lumen Flat Lens Disk



- 120V - 60Hz
- 3000K | 90 CRI
- Dimmable TRIAC, 10-100%
- Steel housing with plastic lens
- 7-3/8" x 1" | 15W | 1240 lms
- Energy Star Listed
- CSAus Listed for wet location
- 5 Year Limited Warranty



White (WH)

ORDERING GUIDE

Example: 8569WH-80-3K-R

Model	Finish	CRI	CCT	Retrofit
8569	WH White	-80	-3K 3000	blank no retrofit option
				-R adds retrofit

Specifications and dimensions subject to change. Lumens are delivered unless otherwise noted. See website for most current information.



9" LED High Lumen Disk



- 120V - 60Hz
- 3000K, 4000K | 90 CRI
- Dimmable TRIAC, 10-100%
- Aluminum Construction
- 9-1/2" x 1-1/4" | 30W | 2085 lms
- Energy Star Listed
- CSAus Listed for wet location
- JA8/Title 24 Compliant
- 5 Year Limited Warranty



White (WH)

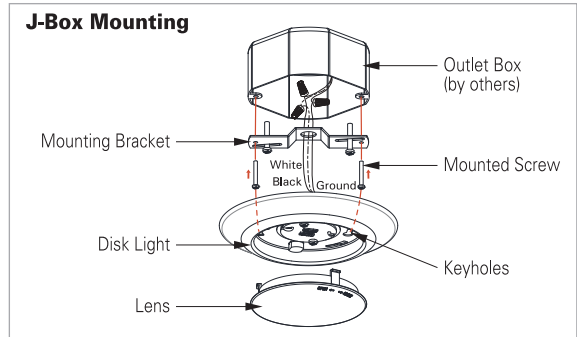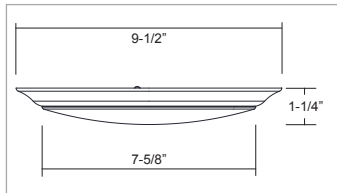

ORDERING GUIDE Example: 8554WH-90-3K

Model	Finish	CRI	CCT
8554	WH White	-90 90 CRI	-3K 3000K -4K 4000K

Specifications and dimensions subject to change.
Lumens are delivered unless otherwise noted.
See website for most current information.

12" / 14" / 16" Dome Ceiling Mount



- 120V - 60Hz
- 3000K | 90 CRI
- Dimmable TRIAC, 10-100%
- Steel construction with acrylic diffuser
- 4336: 11-11/16" x 3-7/8" | 15W | 953 lms
- 4337: 14-1/8" x 4" | 23W | 1319 lms
- 4338: 16-1/2" x 4-7/16" | 34W | 1817 lms
- Energy Star Listed
- CSAus Listed for damp location
- 5 Year Limited Warranty



White (WH)

ORDERING GUIDE Example: 4336WH

Model	Finish	
4336	WH	White
4337		
4338		

11" / 14" Square Dome Ceiling Mount



- 120V - 60Hz
- 3000K | 80 CRI
- Dimmable TRIAC, 10-100%
- Steel construction with acrylic diffuser
- 4320: 10-11/16" x 2-7/8" | 15W | 1118 lms
- 4322: 14-1/2" x 3-1/8" | 23W | 1607 lms
- Energy Star Listed
- cCSAus Listed for damp location
- 5 Year Limited Warranty



White (WH)

ORDERING GUIDE Example: 4320WH

Model	Finish	
4320	WH	White
4322		

8" Wall Sconce



- 120V - 60Hz
- 3000K or 4000K | 80 CRI
- Dimmable TRIAC, 10-100%
- Steel construction with glass diffuser
- 8" x 8" x 4" | 9W | 630 lms
- Energy Star Listed
- cETLus Listed for damp location
- 5 Year Limited Warranty



Brushed Nickel (BN)



Oil Rubbed Bronze (OB) White (WH)

ORDERING GUIDE Example: 4503-30-BN

Model	Finish	
4503-30	-BN	Brushed Nickel
	-OB	Oil Rubbed Bronze
	-WH	White

Half-Circle Wall Sconce



- 120V - 60Hz
- 3000K | 80 CRI
- Dimmable TRIAC, 10-100%
- Steel construction with acrylic diffuser
- 12" x 6" x 3-1/2" | 12W | 840 lms
- Energy Star Listed
- cETLus Listed for damp location
- 5 Year Limited Warranty



Brushed Nickel (BN)

ORDERING GUIDE Example: 4505-30-BN

Model	Finish	
4505-30	-BN	Brushed Nickel

Specifications and dimensions subject to change.
Lumens are delivered unless otherwise noted.
See website for most current information.

Indoor Residential Wall Sconce



- 120V - 60Hz
- 3000K | 80 CRI
- Dimmable TRIAC, 10-100%
- Steel construction with acrylic diffuser
- 7" x 9-7/8" x 3-3/8" | 15W | 800 lms
- Energy Star Listed
- cETLus Listed for damp location
- 5 Year Limited Warranty



Brushed Nickel (BN)



see 4406-30 for Wet Listed Outdoor use pg 178

ORDERING GUIDE Example: 4404-30-BN

Model	Finish
4404-30	-BN Brushed Nickel



Vanity Lighting



Vanity Light Overview



4909-2
2 Light Square Shade Vanity
Page 126



4909-3
3 Light Square Shade Vanity
Page 126



4909-4
4 Light Square Shade Vanity
Page 126




4908-1
1-Light Round Shade Vanity
Page 127




4904-2, 4908-2
2-Light Round Shade Vanity
Page 127




4904-3, 4908-3
3-Light Round Shade Vanity
Page 127



4904-4, 4908-4
4-Light Round Shade Vanity
Page 127



4906-18, 4906-24
18", 24" Linear Vanity
Page 128



4906-36, 4906-48
36", 48" Linear Vanity
Page 128



4907-18, 4907-24
18", 24" Slim Profile Linear Vanity
Page 129



4907-36, 4907-48
36", 48" Slim Profile Linear Vanity
Page 129



4906
Edge-Lit LED Ribbon
Page 130



4905
Edge-Lit LED Ribbon
Page 131

Warranty Information



Integrated LED Lights



Other Components

*Specifications and dimensions subject to change.
Lumens are delivered unless otherwise noted.
See website for most current information.*


Square Shade E26 LED Vanity Light



- 120V - 60 Hz
- Stainless Steel with Frosted Glass Square Shade
- 3000K | 80 CRI
- 9W E26 A19 LED Lamps Included
- Dimmable TRIAC, 10-100%
- Mounted either Up or Down position
- cETLus Listed for damp location
- CEC JA8 Compliant
- 1 Year Limited Warranty



4909-2

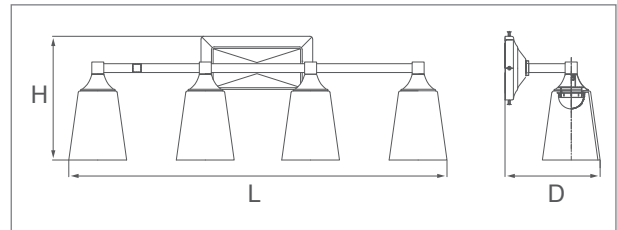

4909-3



4909-4

Model	Size (L x H x D)
4909-2	11-3/4" x 8-3/4" x 7"
4909-3	19-1/2" x 8-3/4" x 7"
4909-4	27-1/8" x 8-3/4" x 7"

ORDERING GUIDE

Example: 4909BN-2

Model	Finish	# of Shades
4909	BN Brushed Nickel	-2
		-3
		-4

Specifications and dimensions subject to change.
Lumens are delivered unless otherwise noted.
See website for most current information.

Round Shade Vanity Light



- 120V - 60 Hz
- Stainless Steel with Frosted Glass Round Shade
- 3000K | 80 CRI

- 4904 - Integral LED
- 4908 - 9W E26 A19 LED Lamp Included
- Dimmable TRIAC, 10-100%
- Mounted either Up or Down position

- cETLus Listed for damp location
- Energy Star Listed
- 4908: CEC JA8 Compliant
- LED Lamp: 5 Year Limited Warranty
- 4904: 1 Year Limited Warranty



4908-1



4908-2
4904-2 *



4908-3
4904-3



4908-4
4904-4

Model	Size (L x H x D)	
4908-1	6-1/4" x 5-1/4" x 10"	
4904/8-2	13" x 5-1/4" x 10"	
4904/8-3	22-1/8" x 5-1/4" x 10"	
4904/8-4	31-1/8" x 5-1/4" x 10"	
Model	Wattage	Delivered Lumens
4904-2	15W	1050 lms
4904-3	25W	1755 lms
4904-4	30W	2110 lms

ORDERING GUIDE

Example: 4904BN-2

Model	Finish	# of Shades
4904	BN Brushed Nickel	-2 *
Integral LED		-3
		-4
Model	Finish	# of Shades
4908	BN Brushed Nickel	-1
E26 A19 LED		-2
		-3
		-4

* Not Energy Star Listed


Specifications and dimensions subject to change.
Lumens are delivered unless otherwise noted.
See website for most current information.

Linear LED Vanity Light



LED Lamp Other Components


- 120V - 60 Hz
- Steel with Opal diffused acrylic lens
- 3000K | 80 CRI
- Dimmable TRIAC, 10-100%
- Horizontal or Vertically Mounted
- Beam Angle 120°
- cETLus Listed for damp location
- Energy Star Listed
- LED Lamp: 5 Year Limited Warranty
- Other Components: 1 Year Limited Warranty

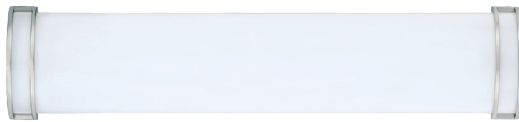


4906-18



4906-24

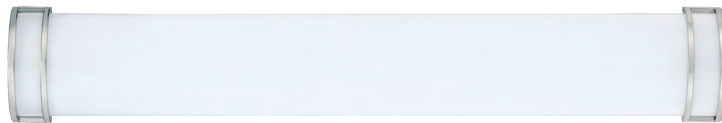

4906-36

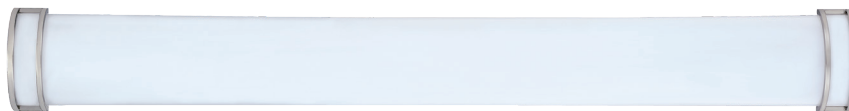

4906-48

Model	Size (L x H x D)
4906-18	18" x 5-3/4" x 4-3/4"
4906-24	24" x 5-3/4" x 4-3/4"
4906-36	36" x 5-3/4" x 4-3/4"
4906-48	48" x 5-3/4" x 4-3/4"

Model	Wattage	Lumens (delivered)
4906-18	20W	1400 lms
4906-24	24W	1600 lms
4906-36	28W	2100 lms
4906-48	35W	2800 lms

ORDERING GUIDE

Example: 4906BN-24

Model	Finish	Length
4906	BN Brushed Nickel	-18
		-24
		-36
		-48

Specifications and dimensions subject to change.
Lumens are delivered unless otherwise noted.
See website for most current information.

Slim Profile Linear Vanity Light



LED Lamp
Other Components

- 120V - 60 Hz
- Steel with linear diffused acrylic lens
- 3000K | 90 CRI
- Dimmable TRIAC, 10-100%
- Horizontal or Vertically Mounted
- Beam Angle 120°
- cETLus Listed for damp location
- Energy Star Listed
- CEC JA8 Compliant
- LED Lamp: 5 Year Limited Warranty
- Other Components: 1 Year Limited Warranty



4907-18



4907-24



4907-36



4907-48

Model	Size (L x H x D)
4907-18	18" x 4-1/2" x 2-5/8"
4907-24	24" x 4-1/2" x 2-5/8"
4907-36	36" x 4-1/2" x 2-5/8"
4907-48	48" x 4-1/2" x 2-5/8"

Model	Wattage	Lumens
4907-18	12W	1080lms Source, 700lms Delivered
4907-24	15W	1350lms Source, 900lms Delivered
4907-36	25W	2250lms Source, 1600lms Delivered
4907-48	30W	2700lms Source, 2000lms Delivered

ORDERING GUIDE

Example: 4907BN-24



Model	Finish	Length
4907	BN Brushed Nickel	-18
		-24
		-36
		-48

Specifications and dimensions subject to change.
Lumens are delivered unless otherwise noted.
See website for most current information.

Curved LED Ribbon Vanity Light



- 120V - 60 Hz
- Steel with acrylic ribbon diffuser
- 3000K | 80 CRI
- 9W | 500 lms
- Dimmable TRIAC, 10-100%
- 10" L x 4-1/2" H x 3" W
- ETL Listed
- LED Lamp: 5 Year Limited Warranty
- Other Components: 1 Year Limited Warranty

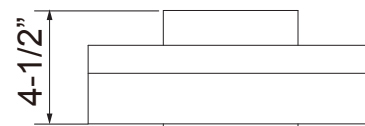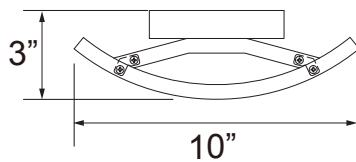




ORDERING GUIDE		Example: 4506BN
Model	Finish	
4506	BN	Brushed Nickel

Specifications and dimensions subject to change.
Lumens are delivered unless otherwise noted.
See website for most current information.

Linear LED Ribbon Vanity Light



- 120V - 60 Hz
- Steel with acrylic ribbon diffuser
- 3000K | 80 CRI
- 22W | 1500 lms
- Dimmable TRIAC, 10-100%
- 24" L x 4-1/2" H x 3" W
- ETL Listed
- LED Lamp: 5 Year Limited Warranty
- Other Components: 1 Year Limited Warranty

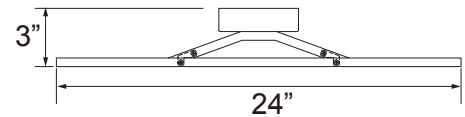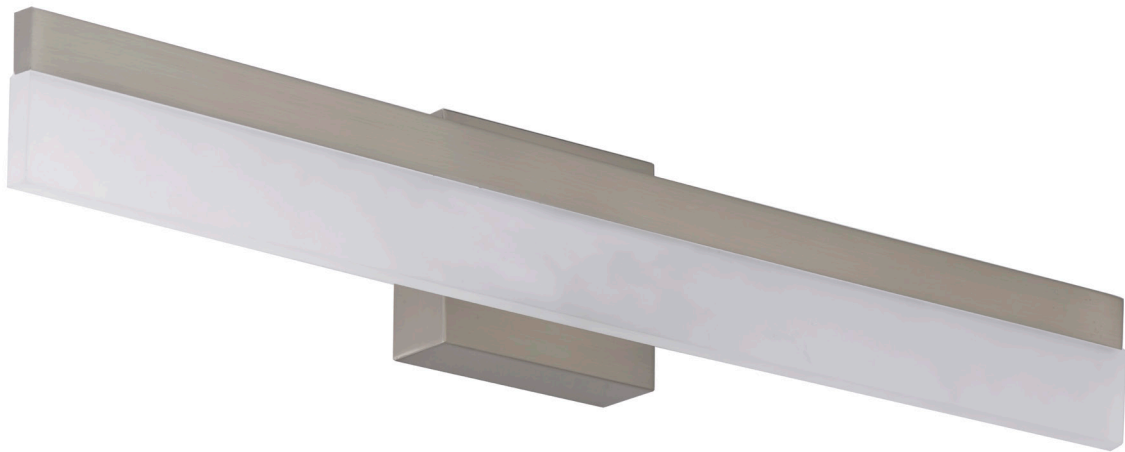

ORDERING GUIDE Example: 4905BN-24

Model	Finish	Length
4905	BN Brushed Nickel	-24

Decorative Suspended



Decorative Suspended Overview



4603-3

Round Shade Chandelier
Page 134



4603-5

Round Shade Chandelier
Page 134



4601

Chandelier Edge-Lit LED
Round Ribbon Light
Page 135



4602

Chandelier Edge-Lit LED
Round Ribbon Light
Page 135



4604-4

Linear Island LED Light
Page 136



4600

Linear Edge-lit LED Ribbon Light
Page 137



4606

Opal Glass LED Pendant Light
Page 138



4430

Round Shade LED
Pendant Light
Page 139



4605

E26 LED Pendant Light
Page 139

Warranty Information



Integrated LED Lights



Other Components

*Specifications and dimensions subject to change.
Lumens are delivered unless otherwise noted.
See website for most current information.*

Round Shade Chandelier





- 120V 60 Hz
- Steel with Frosted Opal Glass Shade
- 3000K | 80 CRI
- Ceiling Canopy fits standard electrical box
- 9W E26 A19 LED Lamps Included
- Dimmable TRIAC, 10-100%
- Includes 36" of Brushed Nickel chain with power cord
- cETLus Listed for damp location
- Energy Star Listed
- 1 Year Limited Warranty

4603BN-3



4603BN-5

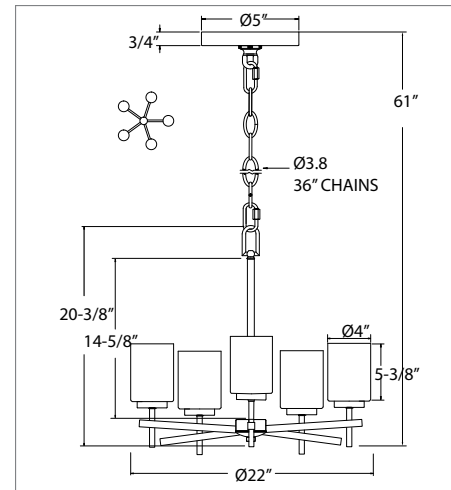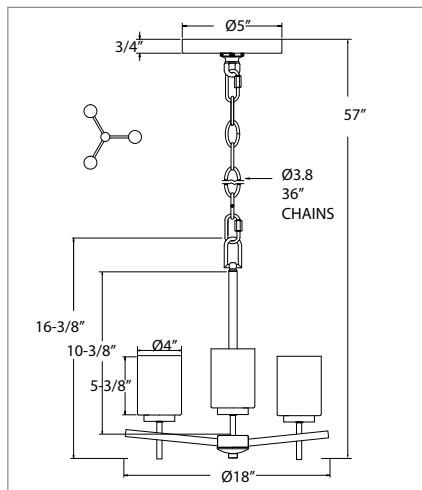

ORDERING GUIDE Example: 4603BN-3

Model	Finish		# of lights
4603	BN	Brushed Nickel	-3
			-5

Specifications and dimensions subject to change. Lumens are delivered unless otherwise noted. See website for most current information.

Chandelier Edge-Lit LED Round Ribbon Light





LED Lamp Other Components

- 120V 60 Hz - Power Over Cable
- Metal with diffused acrylic ribbon lens
- 3000K | 80 CRI
- 4601 - 25W | 1750 lms delivered
- 4602 - 60W | 4200 lms delivered
- Dimmable TRIAC, 10-100%
- Adjustable 6' wire length
- cETLus Listed for damp location
- Energy Star Listed
- LED Lamp: 5 Year Limited Warranty
- Other Components: 1 Year Limited Warranty

4601



4602

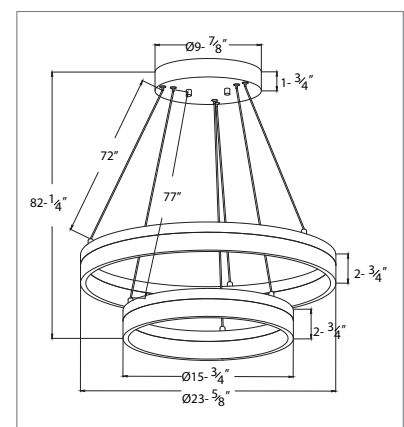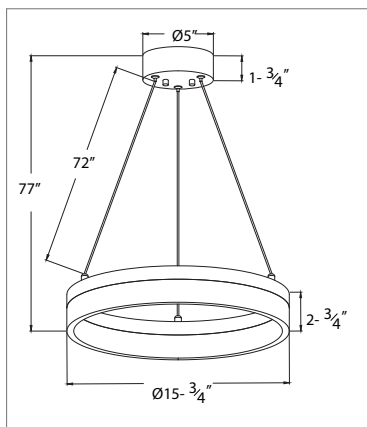

ORDERING GUIDE Example: 4601BN

Model	Finish
4601	BN Brushed Nickel

ORDERING GUIDE Example: 4602BN


Model	Finish
4602	BN Brushed Nickel

Specifications and dimensions subject to change.
Lumens are delivered unless otherwise noted.
See website for most current information.

Linear Island LED Light



- 120V 60 Hz
- Steel with Frosted Opal Glass Shade
- 3000K | 80 CRI
- Ceiling Canopy fits standard electrical box
- 9W E26 A19 LED Lamps Included
- Dimmable TRIAC, 10-100%
- Includes (2) 6" rods and (2) 12" rods per stem
- cETLus Listed for damp location
- Energy Star Listed
- 1 Year Limited Warranty

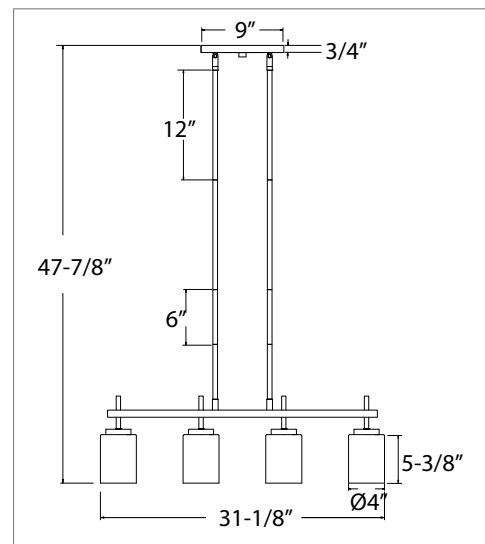

ORDERING GUIDE Example: 4604BN-4

Model	Finish	# of lights
4604	BN Brushed Nickel	-4



Specifications and dimensions subject to change.
Lumens are delivered unless otherwise noted.
See website for most current information.

Linear Edge-lit LED Ribbon Light



LED Lamp
Other Components

- 120V 60 Hz - Power Over Cable
- Metal with diffused acrylic ribbon lens
- 3000K | 80 CRI
- 28W | 1600 lms delivered
- Dimmable TRIAC, 10-100%
- Adjustable 6' wire length
- cETLus Listed for damp location
- LED Lamp: 5 Year Limited Warranty
- Other Components: 1 Year Limited Warranty

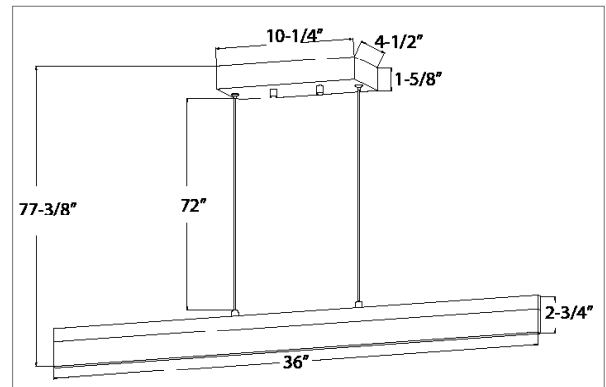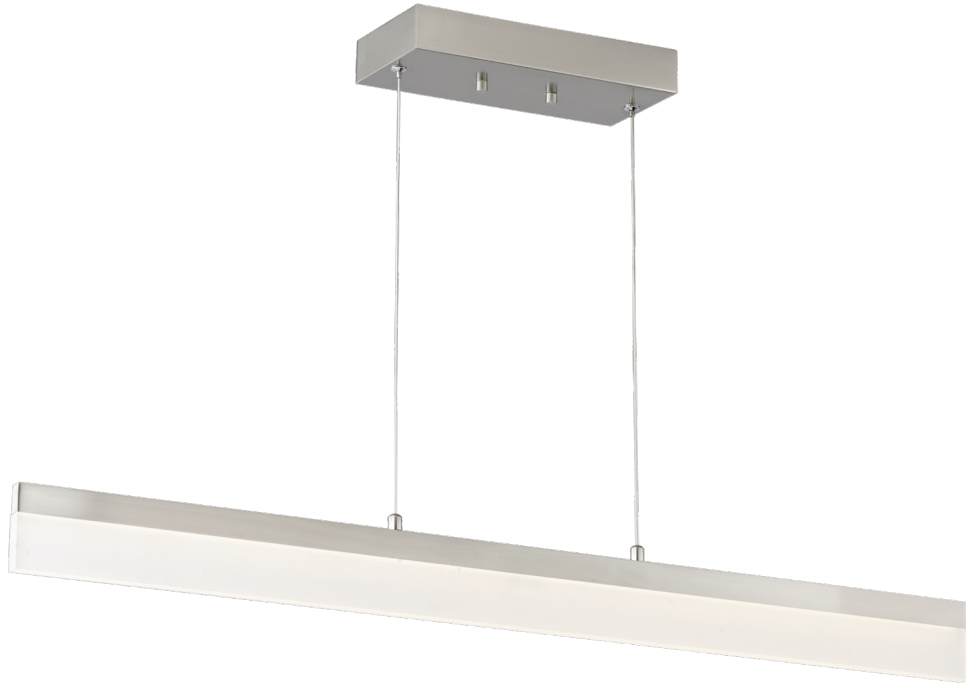

ORDERING GUIDE

Example: 4600BN

Model	Finish	
4600	BN	Brushed Nickel


Specifications and dimensions subject to change.
Lumens are delivered unless otherwise noted.
See website for most current information.

Opal Glass Pendant Light



LED Lamp
Other Components

- 120V 60 Hz
- Steel with Frosted Opal Glass Shade
- 3000K | 90 CRI
- 1 x 9W E26 A19 LED, lamp included
- Dimmable TRIAC, 10-100%
- Adjustable 6' Cord
- CETLus Listed for damp location
- Energy Star Listed
- LED Lamp: 5 Year Limited Warranty
- Other Components: 1 Year Limited Warranty

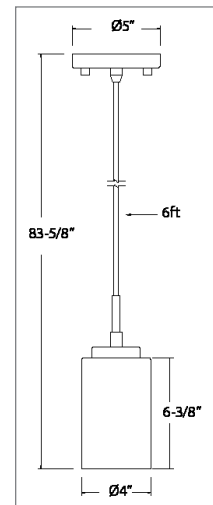

ORDERING GUIDE Example: 4606BN

Model	Finish	
4606	BN	Brushed Nickel


Specifications and dimensions subject to change.
Lumens are delivered unless otherwise noted.
See website for most current information.

Round Shade Pendant Light



4430 LED Lamp
Other Components

- 120V 60 Hz
- Steel with Frosted Opal Glass Shade
- 3000K | 80 CRI | 4605 - 80 CRI
- Ceiling Canopy fits standard electrical box
- 4430 - 8W | 600 lms
- 4605 - 9W E26 A19 LED Lamp Included
- Dimmable TRIAC, 10-100%
- Adjustable 6' Cord
- cETLus Listed for damp location
- Energy Star Listed
- 4430 LED Lamp: 5 Year Limited Warranty
- Other Components: 1 Year Limited Warranty

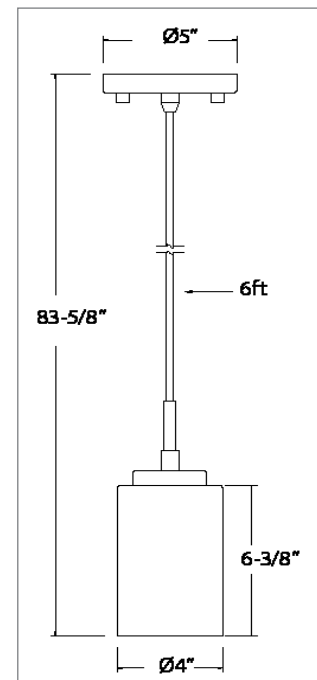


4430
Oil Rubbed Bronze (OB)

ORDERING GUIDE Example: 4430BN

Model	Finish	
4430	BN	Brushed Nickel
Integrated LED	OB	Oil Rubbed Bronze
Model	Finish	
4605	BN	Brushed Nickel
E26 A19 LED		

Specifications and dimensions subject to change.
Lumens are delivered unless otherwise noted.
See website for most current information.

Linear Lighting

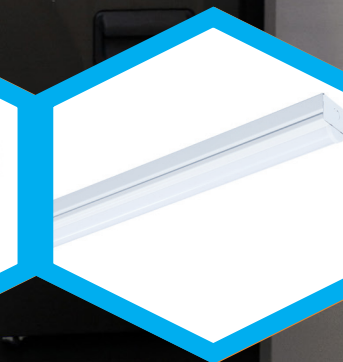

Linear Lighting Overview



89xx

Slim Profile Under Cabinet Light
Page 142



89xx-2734

CCT Selectable Under Cabinet Light
Page 143



4115

Linear Stairwell - 2'
Page 144



4116

Linear Stairwell - 4'
Page 145



4105

4' LED Cloud
Page 146



4106

4' LED Cloud
Page 146



4217

4' Narrow Prismatic Wrap
Page 147



4218

4' Wide Prismatic Wrap
Page 147



4204

4' Euro Wrap
Page 147



4309-4312

2' and 4' LED Strip Light
Page 148



4117

2' Vapor Tight Linear Fixture
Page 149



4120

2' Vapor Tight Linear Fixture
Page 149

Warranty Information



Integrated LED Lights



Other Components

Specifications and dimensions subject to change.
Lumens are delivered unless otherwise noted.
See website for most current information.


Slim Profile Under Cabinet Light



LED Lamp Other Components

- 120 V 60 Hz
- Aluminum housing with Ribbed Acrylic Curved Lens
- 3000K | 90 CRI
- Dimmable TRIAC, 10-100%
- Available in White or Brushed Aluminum Housing
- Linkable design for hardwire and plug-in
- Hinged wiring trough for easy access
- cCSAus Listed for damp location
- Energy Star Listed
- LED Lamp: 5 Year Limited Warranty
- Other Components: 1 Year Limited Warranty

LINEAR LIGHTING

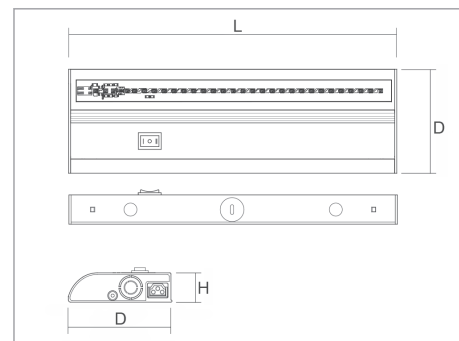

Model	Size (L x H x D)
8966	9" x 3-3/4" x 1-1/16"
8967	12" x 3-3/4" x 1-1/16"
8968	18" x 3-3/4" x 1-1/16"
8969	21" x 3-3/4" x 1-1/16"
8970	24" x 3-3/4" x 1-1/16"
8971	36" x 3-3/4" x 1-1/16"
8972	48" x 3-3/4" x 1-1/16"

Model	Wattage	Lumens (delivered)
8966	4W	200 lms
8967	5W	270 lms
8968	7W	420 lms
8969	8W	460 lms
8970	9W	580 lms
8971	13W	800 lms
8972	17W	1070 lms

ORDERING GUIDE Example: 8966WH

Model	Finish
8966 9"	WH White
8967 12"	BA Brushed Aluminum
8968 18"	
8969 21"	
8970 24"	
8971 36"	
8972 48"	

Specifications and dimensions subject to change.
Lumens are delivered unless otherwise noted.
See website for most current information.

CCT Selectable Under Cabinet Light




- 120 V 60 Hz
- Aluminum housing with Ribbed Acrylic Curved Lens
- 90 CRI
- Dimmable TRIAC, 10-100%
- CCT Selectable - 2700K, 3000K, 4000K
- Available in White Housing
- Linkable design for hardwire and plug-in
- Hinged wiring trough for easy access
- cCSAus Listed for damp location
- Energy Star Listed
- CEC JA8 Compliant
- LED Lamp: 5 Year Limited Warranty
- Other Components: 1 Year Limited Warranty



Adjusted Color of Light with Intrgrated Switch

- SOFT WHITE (2700K)
- BRIGHT WHITE (4000K)
- DAYLIGHT (5000K)

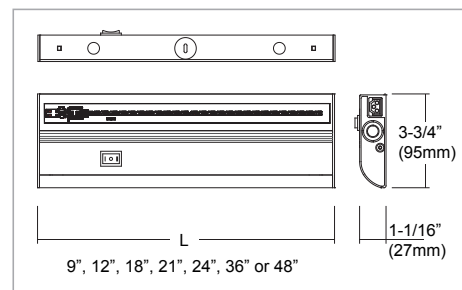

Model	Size (L x H x D)
8966WH-2734	9" x 3-3/4" x 1-1/16"
8967WH-2734	12" x 3-3/4" x 1-1/16"
8968WH-2734	18" x 3-3/4" x 1-1/16"
8969WH-2734	21" x 3-3/4" x 1-1/16"
8970WH-2734	24" x 3-3/4" x 1-1/16"
8971WH-2734	36" x 3-3/4" x 1-1/16"
8972WH-2734	48" x 3-3/4" x 1-1/16"

Model	Wattage	Lumens
8966WH-2734	4W	320lms Source, 250lms Delivered
8967WH-2734	5W	400lms Source, 315lms Delivered
8968WH-2734	7W	630lms Source, 500lms Delivered
8969WH-2734	8W	750lms Source, 595lms Delivered
8970WH-2734	9W	850lms Source, 670lms Delivered
8971WH-2734	13W	1140lms Source, 900lms Delivered
8972WH-2734	17W	1500lms Source, 1190lms Delivered

ORDERING GUIDE Example: 8966WH-2734


Model	Finish	CCT
8966 9"	WH White	-2734 2700K, 3000K, 4000K
8967 12"		
8968 18"		
8969 21"		
8970 24"		
8971 36"		
8972 48"		

Specifications and dimensions subject to change. Lumens are delivered unless otherwise noted. See website for most current information.

Linear Stairwell - 2'



- 120-277V Universal
- Steel Body with acrylic lens
- 4000K | 80 CRI
- 20W | 2100 lms delivered
- -OS - Microwave Daylight/Motion Sensor Option
- -EM - Emergency Battery Pack Option
- Ceiling or Wall Mount
- cETLus Listed for damp location
- LED lamp: 5 year Limited Warranty
- Other Components: 1 Year Limited Warranty

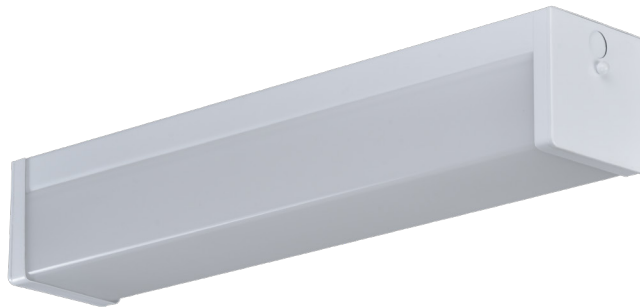


4115WH

2' Stairwell - NON-Dimmable

4115DM-WH

2' Stairwell - Dimmable 0-10V

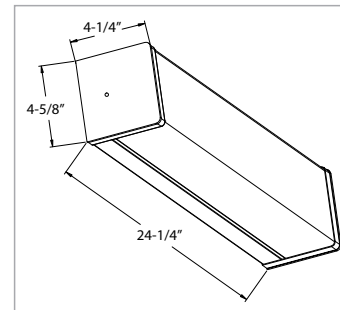

Dimensions (L x W x H)
24-1/4" x 4-1/4" x 4-5/8"

ORDERING GUIDE


Model	Finish	Motion Sensor Option	EM Battery Pack Option
4115	2' Non-Dimmable	WH White	-OS adds sensor
4115DM	0-10V Dimmable		-EM adds Battery Pack

Example: 4115WH-OS-EM

Linear Stairwell - 4'




- 120-277V Universal
- Steel Body with acrylic lens
- 4000K | 80 CRI
- Ceiling or Wall Mount
- 4116 - 38W | 4150 lms delivered
- 4116DM - 40W | 4600 lms delivered
- -OS - Microwave Daylight/Motion Sensor Option
- -EM - Emergency Battery Pack Option
- cETLus Listed for damp location
- 4116DM - DLC Listed
- LED lamp: 5 year Limited Warranty
- Other Components: 1 Year Limited Warranty

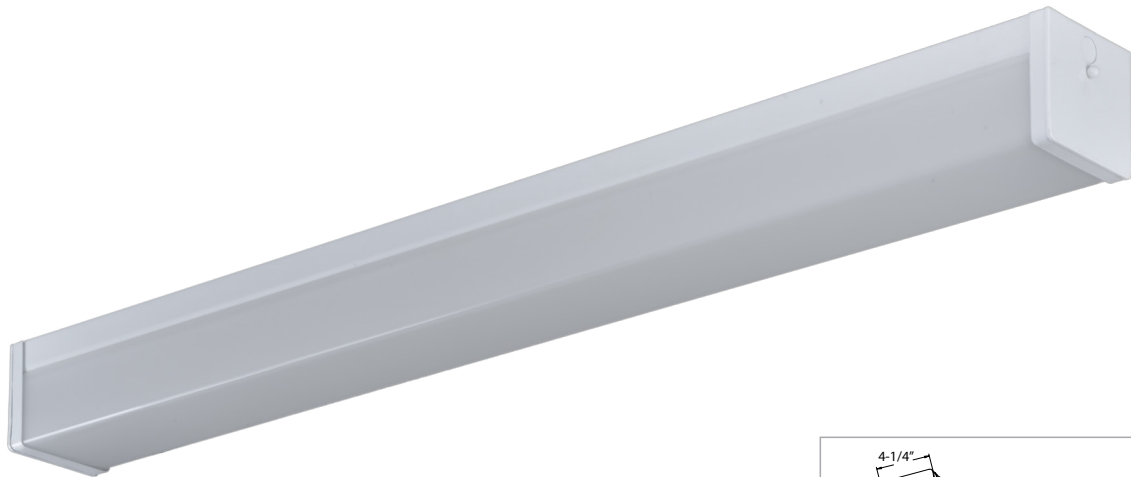

4116WH
4' Stairwell - NON-Dimmable

4116DM-WH
4' Stairwell - Dimmable 0-10V

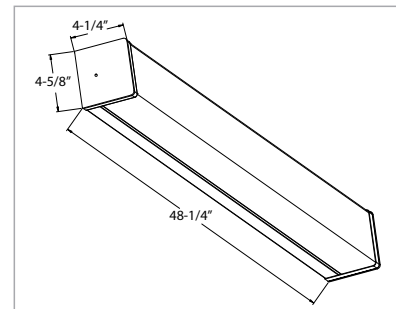

Dimensions (L x W x H)
48-1/4" x 4-1/4" x 4-5/8"

ORDERING GUIDE Example: 4116WH-OS-EM

Model	Options
4116WH	blank no options -OS adds Microwave -EM add EM Battery
Model	Options
4116DM-WH	blank no options -OS adds Microwave -EM add EM Battery

Specifications and dimensions subject to change.
Lumens are delivered unless otherwise noted.
See website for most current information.

LED Cloud




LED Lamp Other Components

- 120V / 277V
- Steel Body with white acrylic lens
- 4000K | 80 CRI
- 4105 - 35W | 2800 lms delivered
- 4106 - 70W | 5600 lms delivered
- Non-dimmable
- Ceiling Mount
- cETLus Listed for damp location
- Energy Star Listed
- LED lamp: 5 year Limited Warranty
- Other Components: 1 Year Limited Warranty


4105-40-WH

4' Cloud

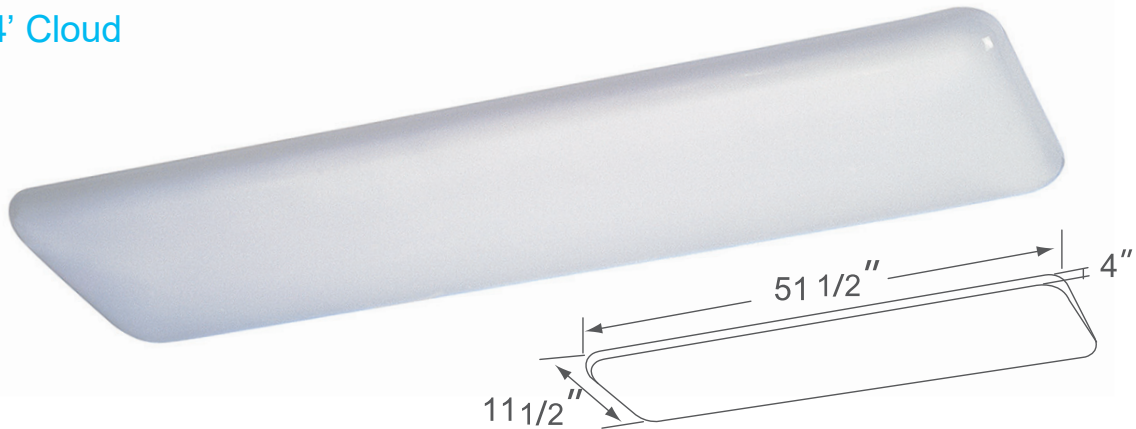

4106-40-WH

4' Cloud

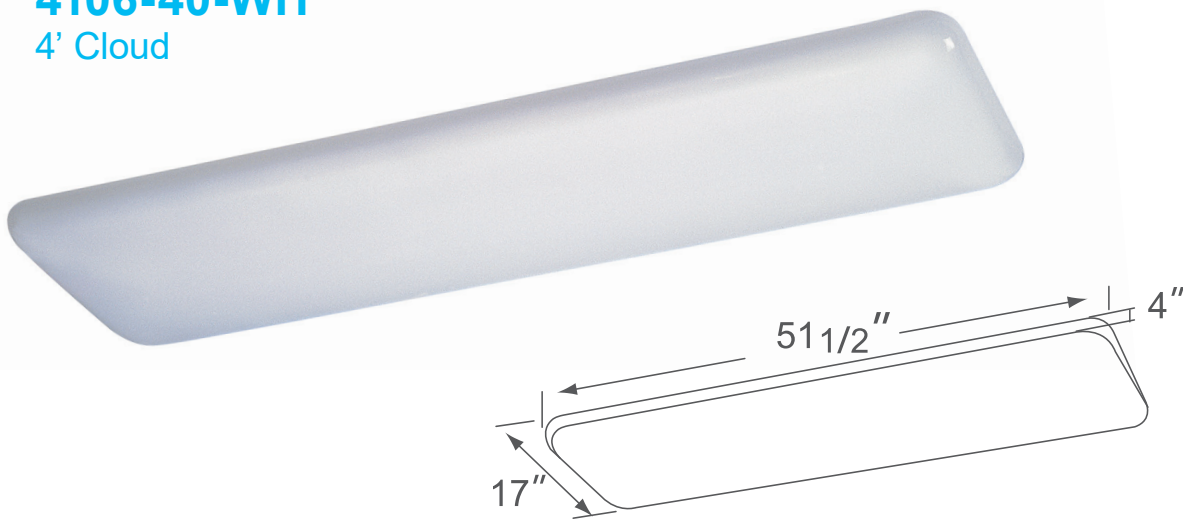

ORDERING GUIDE

Example: 4105-40-WH

Model	Finish
4105-40 35W 2800 lms	-WH White
4106-40 70W 5600 lms	

Specifications and dimensions subject to change.
Lumens are delivered unless otherwise noted.
See website for most current information.



LED Prismatic Wraparound




- 120V / 277V
- Steel housing with white acrylic prismatic lens
- 4000K | 80 CRI | Non-Dimmable
- Ceiling Mount
- 4217 - 35W | 3200 lms delivered
- 4218 - 75W | 7000 lms delivered
- -OS - Microwave Daylight/Motion Sensor Option
- -EM - Emergency Battery Pack Option
- ETLus Listed for damp location
- LED lamp: 5 year Limited Warranty
- Other Components: 1 Year Limited Warranty



4217WH
4' Narrow Prismatic Wrap

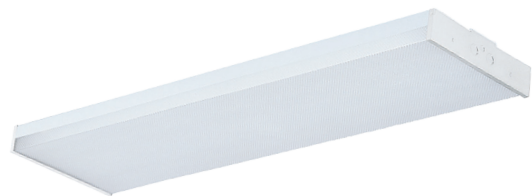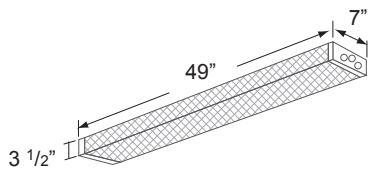

4218WH
4' Wide Prismatic Wrap

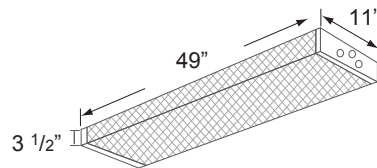

ORDERING GUIDE


Example: 4117WH-OS-EM

Model	Options
4217WH 35W 3500 lms	blank no options -OS adds Microwave -EM add EM Battery
4218WH 75W 7000 lms	

LED Euro Wrap



- 120V / 277V
- Steel housing with white acrylic lens and iron end caps
- 4000K | 80 CRI
- 35W | 2800 lms delivered
- Non-dimmable
- Ceiling Mount
- cETLus Listed for damp location
- LED lamp: 5 year Limited Warranty
- Other Components: 1 Year Limited Warranty

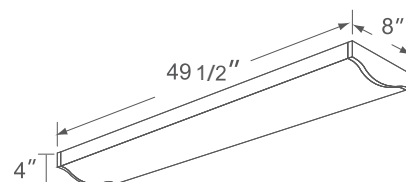

ORDERING GUIDE

Example: 4204WH


Model
4204WH 4' Warp - 2800 lms

Specifications and dimensions subject to change.
Lumens are delivered unless otherwise noted.
See website for most current information.

LED Strip Light



- 120-277V
- Steel housing with polycarbonate lens
- 4000K | 80 CRI
- Surface or Pendant Mount
- 0-10V Dimming
- Driver accessible from below ceiling
- CSAus Listed for damp location
- LED Lamp: 5 Year Limited Warranty
- Other Components: 1 Year Limited Warranty

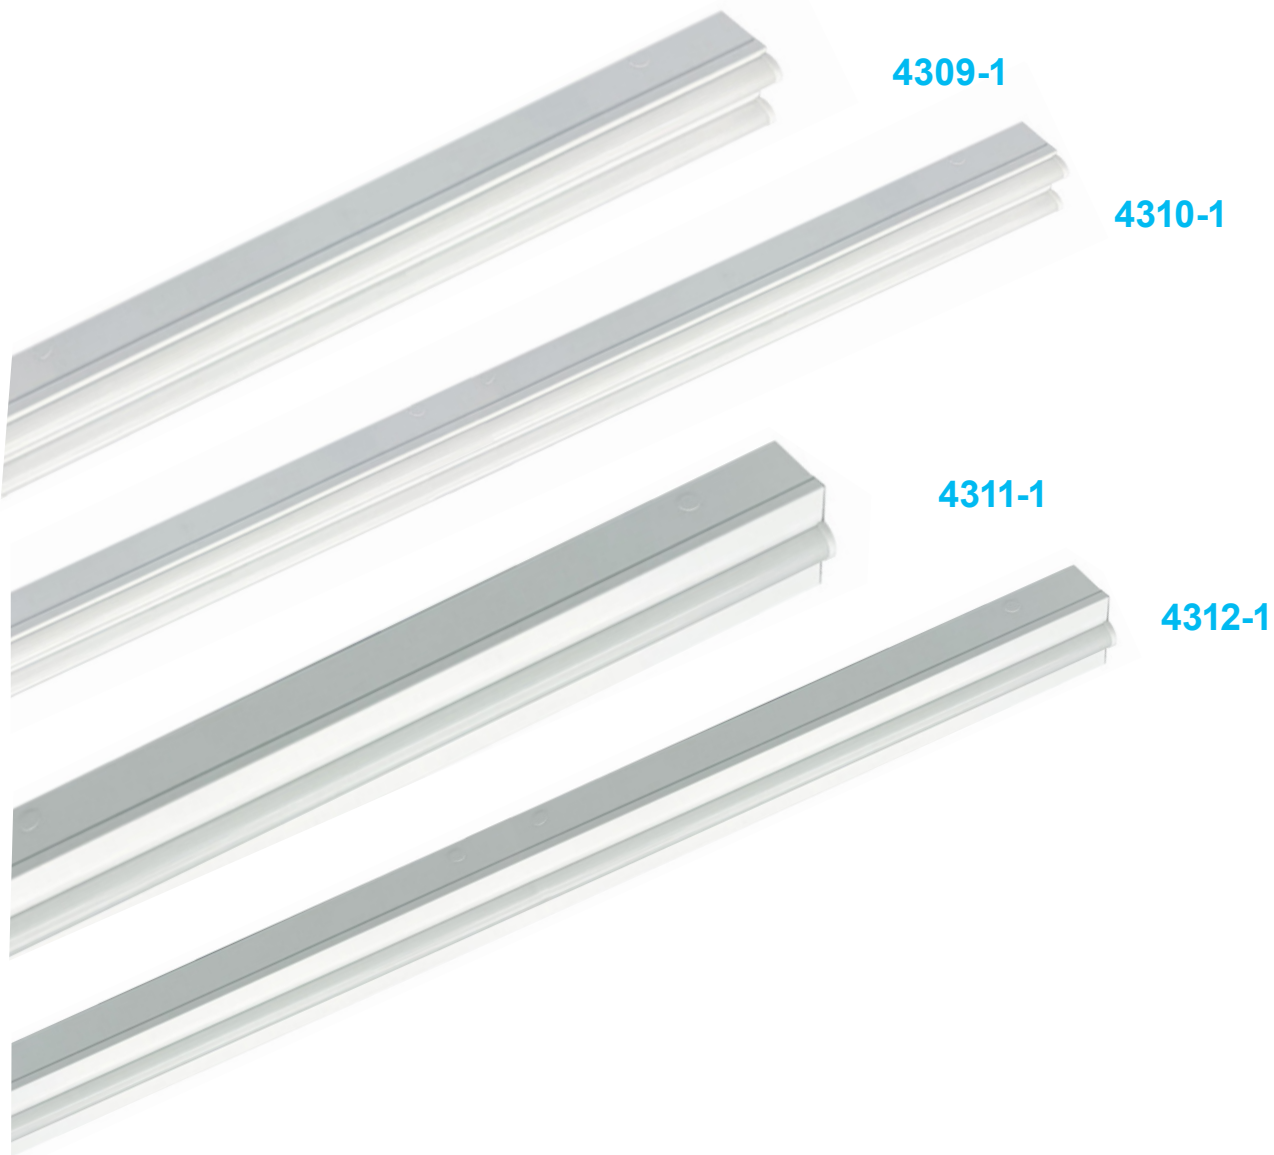

Model	Size (L x W x D)
4309-1	24" x 3-1/4" x 2-3/4"
4310-1	48" x 3-1/4" x 2-3/4"
4311-1	24" x 3-1/4" x 2-3/4"
4312-1	48" x 3-1/4" x 2-3/4"

Model	Wattage	Lumens (delivered)
4309-1	20W	2100 lms
4310-1	35W	3675 lms
4311-1	10W	1050 lms
4312-1	20W	2100 lms

ORDERING GUIDE Example: 4309WH-1

Model	EM Option
4309WH-1	-EM adds EM Battery Pack *
4310WH-1	
4311WH-1	
4312WH-1	

* -EM option only available on 4310WH-1 and 4312WH-1


Specifications and dimensions subject to change. Lumens are delivered unless otherwise noted. See website for most current information.

Linear Vapor Tight




- 120-277V Universal
- Single piece polycarbonate body
- Gasketed polycarbonate lens
- Stainless Steel latches included
- 0-10V Dimming | 4000K | 80 CRI
- Operating Temp: -30oC to 50oC
- -OS - Microwave Daylight/Motion Sensor Option
- -EM - Emergency Battery Pack Option
- CSAus Listed for wet location
- IP65 Rated
- 4117-1 - DLC5.1 Listed
- LED Lamps: 5 Year Limited Warranty
- Other Components: 1 Year Limited Warranty

4117-1 Series

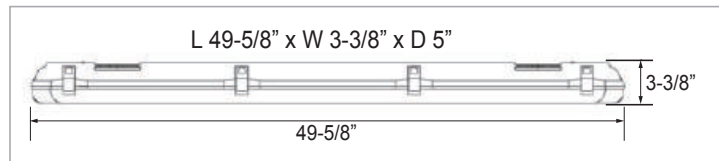

4120 Series

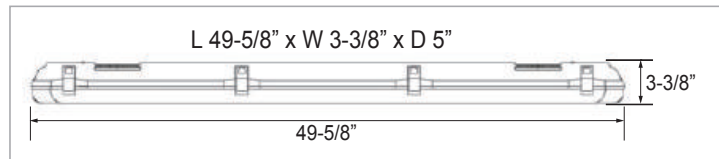

Model	Wattage	Lumens (delivered)
4120-WH	20W	2000 lms
4117-1-WH-35	35W	3675 lms
4117-1-WH-50	50W	5250 lms
4117-1-WH-70	70W	7350 lms

ORDERING GUIDE Example: 4117-1-WH-35-4K-MS-EM

Model	Options	Watts	CCT	Options
4117-1	-WH White	-35 -50 -70	-4K	blank no options -MS adds Microwave -EM adds EM Battery
Model	Options			
4120-WH-20-4K				blank no options -MS adds Microwave sensor

Specifications and dimensions subject to change.
Lumens are delivered unless otherwise noted.
See website for most current information.

Exit & Emergency



Exit / Emergency Lighting Overview

Exit



RXL5
Standard Exit Sign
Page 153



RXL28
Exit Sign, Wet & Cold Location
Page 153



RXL17
Surface Mount Edge-lit Exit -
Single Face
Page 154



RXL18
Surface Mount Edge-lit Exit -
Double Face
Page 154



RXL33
Recessed Edge-lit Exit
- Single Face
Page 155



RXL34
Recessed Edge-lit Exit
- Double Face
Page 155



RXL15-1
Die Cast Exit Sign
- Single Face
Page 156



RXL16-1
Die Cast Exit Sign
- Double Face
Page 156



RXEL35
Recessed Edge-lit Exit/
EM Combo - Single Face
Page 157



RXEL36
Recessed Edge-lit Exit/
EM Combo - Double Face
Page 157



RXEL25
Exit/Emergency Combo,
Wet & Cold
Page 157



RXEL37
Standard Exit/Emergency
Combo
Page 158



RXEL38
High Output Exit/
Emergency Combo
Page 158



RXEL39
High Output Remote Capable
Exit/Emergency Combo
Page 159



RXEL40
High Output Self Diagnostic
Exit/Emergency Combo
Page 159

Exit / Emergency Lighting Overview

Emergency



REL35
Recessed 2-Head
Emergency Light
Page 160



REL20, REL21
Compact Emergency,
Compact High Output Emergency
Page 161



REL22, REL23
Remote Head Capable Emergency,
Self Diagnostic Emergency
Page 162



REL6LED
Compact High-Lumen
Emergency
Page 163



REL7LED
Die Cast Exit Sign
Page 164



REL5LED
Outdoor Full Cutoff Emergency
Page 164



RH17
Wet Location Remote Head
Page 165



RH18
Wet Location Remote Heads
Page 165



RH21, RH22
1 and 2 Indoor Remote Heads
Page 165



4783EM
Constant Power Emergency
LED Battery Back-up
Page 166



4782EM
Emergency LED Battery
Back-up
Page 166



4785
7" LED Flush Mount
Emergency Back-up
Page 167

Warranty Information



Integrated LED Lights



Other Components

Standard Exit Sign



LED Lamp
Other Components

- 120V/277V
- Flame-rated Thermoplastic Housing
- Single or Double Face

- Operating Temp: 10°C to 40°C
- 2.4V, 300 mAh Ni-Cad Battery
- Wall, Ceiling, or End Mount
- Self-diagnostic Option Available

- UL Listed for damp location to UL924 standards
- CEC Title 20 Compliant
- LED Lamp: 5 Year Limited Warranty
- Other Components: 1 Year Limited Warranty



Green Letters with White Housing



Red Letters with White Housing



ORDERING GUIDE

Example: RXL5RW

Model	Lettering/Housing	Self-diagnostic Option
RXL5 Standard Exit Sign	RW White with Red Lettering RB Black with Red Lettering GW White with Green Lettering GB Black with Green Lettering	blank no SD Option -SD Self-Diagnostic*

* Only available on RXL5RW and RXL5GW

Exit Sign, Wet & Cold Location



LED Lamp
Other Components

- 120V/277V
- Polycarbonate Lens and Waterproof Thermoplastic Housing
- Single or Double Face

- Operating Temp: -25°C to +50°C
- 3.6V, 400 mAh Ni-Cad Battery
- Wall, Ceiling, or End Mount


- UL Listed for wet and cold location to UL924 standards
- CEC Title 20 Compliant
- LED Lamp: 5 Year Limited Warranty
- Other Components: 1 Year Limited Warranty



Green Letters with White Housing



Red Letters with White Housing

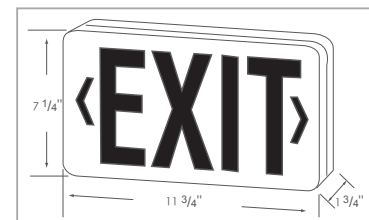

ORDERING GUIDE

Example: RXL28RW

Model	Lettering/Housing
RXL28 Exit Sign, Wet & Cold Listed	RW White with Red Lettering GW White with Green Lettering

Specifications and dimensions subject to change.
Lumens are delivered unless otherwise noted.
See website for most current information.

Surface Mount Edge-lit Exit - Single Face



- 120V/277V
- Die-cast Aluminum Housing
- Clear Acrylic Thermoplastic Faceplate
- Operating Temp: 10°C to 40°C
- 4.8V, 300 mAh Ni-Cad Battery
- Wall or Ceiling Mount


- UL Listed for damp location to UL924 standards
- CEC Title 20 Compliant
- LED Lamps: 5 Year Limited Warranty
- Other Components: 1 Year Limited Warranty



LED Green Letters, Single Face



LED Red Letters, Single Face

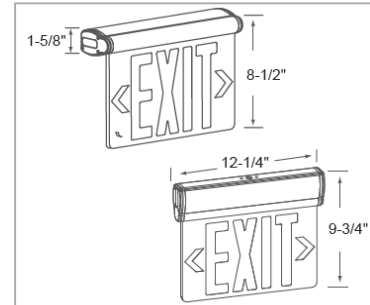

ORDERING GUIDE

Example: RXL17RW

Model	Lettering/Housing	Self-diagnostic Option
RXL17	RW Red w/white housing	blank no SD option
Surface Mount	RBA Red w/brushed aluminum housing	-SD Self-Diagnostic
Edge-lit Exit -	GW Green w/white housing	
Single Face	GBA Green w/brushed aluminum housing	

Surface Mount Edge-lit Exit - Double Face



- 120V/277V
- Die-cast Aluminum Housing
- Clear Acrylic Thermoplastic Double Mirror Faceplate
- Operating Temp: 10°C to 40°C
- 4.8V, 300 mAh Ni-Cad Battery
- Wall or Ceiling Mount


- UL Listed for damp location to UL924 standards
- CEC Title 20 Compliant
- LED Lamps: 5 Year Limited Warranty
- Other Components: 1 Year Limited Warranty



LED green letters, double face



LED red letters, double face

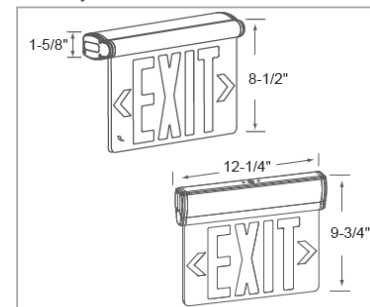

ORDERING GUIDE

Example: RXL18RW

Model	Lettering/Housing	Self-diagnostic Option
RXL18	RW Red w/white housing	blank no SD option
Surface Mount	RBA Red w/brushed aluminum housing	-SD Self-Diagnostic
Edge-lit Exit -	GW Green w/white housing	
Double Face	GBA Green w/brushed aluminum housing	

Operation

When normal utility power fails, the internal solid-state transfer switch automatically connects the internal battery to the LED lamps, lighting a path of egress for no less than 90 minutes. When utility power is restored the battery is recharged by the onboard solid-state recharger. Full recharge is accomplished within 24 hours.

Specifications and dimensions subject to change. Lumens are delivered unless otherwise noted. See website for most current information.

Recessed Edge-lit Exit - Single Face



LED Lamp Other Components

- 120V/277V
- Aluminum Housing & Back Box
- Clear Acrylic Thermoplastic Faceplate
- Operating Temp: 10°C to 40°C
- 4.8V, 300 mAh Ni-Cad Battery
- Wall or Ceiling Mount


- UL Listed for damp location to UL924 standards
- CEC Title 20 Compliant
- LED Lamps: 5 Year Limited Warranty
- Other Components: 1 Year Limited Warranty



LED Green Letters, Single Face



LED Red Letters, Single Face

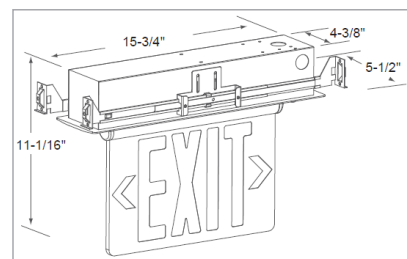

ORDERING GUIDE

Example: RXL33RW

Model	Lettering/Housing
RXL33	RW Red with white housing
Recessed	RBA Red with brushed aluminum housing
Edge-lit Exit -	GW Green with white housing
Single Face	GBA Green with brushed aluminum housing

Recessed Edge-lit Exit - Double Face



LED Lamp Other Components

- 120V/277V
- Aluminum Housing & Back Box
- Clear Acrylic Thermoplastic Double Mirror Faceplate
- Operating Temp: 10°C to 40°C
- 4.8V, 300 mAh Ni-Cad Battery
- Wall or Ceiling Mount


- UL Listed for damp location to UL 924 standards
- CEC Title 20 Compliant
- LED Lamps: 5 Year Limited Warranty
- Other Components: 1 Year Limited Warranty



LED Red Letters, Double Face



LED Green Letters, Double Face

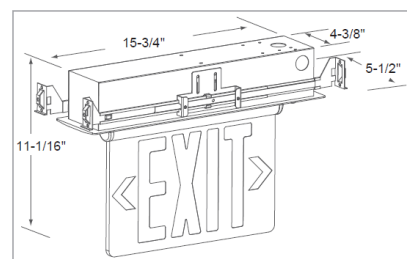

ORDERING GUIDE

Example: RXL34RW

Model	Lettering/Housing
RXL34	RW Red w/white housing
Recessed	RBA Red w/brushed aluminum housing
Edge-lit Exit -	GW Green w/white housing
Double Face	GBA Green w/brushed aluminum housing

Specifications and dimensions subject to change.
Lumens are delivered unless otherwise noted.
See website for most current information.

Die Cast Exit Sign - Single Face



LED Lamp Other Components

- 120V/277V
- Die Cast Aluminum Housing
- Die Cast Aluminum Faceplate
- Operating Temp: 10°C to 40°C
- Red Lettering - 2.4V, 300 mAh Ni-cad Battery; Green Lettering - 3.6V, 300 mAh Ni-cad Battery
- Wall, Ceiling or End Mount
- UL Listed for damp location to UL924 standards
- CEC Title 20 Compliant
- LED Lamps: 5 Year Limited Warranty
- Other Components: 1 Year Limited Warranty




RXL15-1GBA

LED Green Letters, Single Face



RXL15-1RBA

LED Red Letters, Single Face



ORDERING GUIDE

Example: RXL15-1RBA

Model	Lettering/Housing
RXL15-1 Die Cast Exit Sign - Single Face	RBA Red with brushed aluminum housing GBA Green with brushed aluminum housing

Die Cast Exit Sign - Double Face



LED Lamp Other Components

- 120V/277V
- Die Cast Aluminum Housing
- Die Cast Aluminum Faceplates
- Operating Temp: 10°C to 40°C
- Red Lettering - 2.4V, 300 mAh Ni-cad Battery; Green Lettering - 3.6V, 300 mAh Ni-cad Battery
- Wall, Ceiling or End Mount
- UL Listed for damp location to UL924 standards
- CEC Title 20 Compliant
- LED Lamps: 5 Year Limited Warranty
- Other Components: 1 Year Limited Warranty




RXL16-1RBA

LED Red Letters, Double Face



RXL16-1GBA

LED Green Letters, Double Face

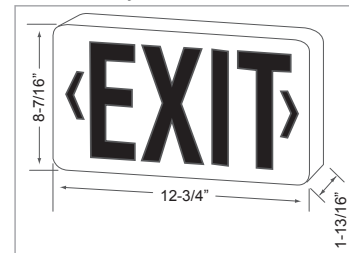

ORDERING GUIDE

Example: RXL16-1RBA

Model	Lettering/Housing
RXL16-1 Die Cast Exit Sign - Double Face	RBA Red with brushed aluminum housing GBA Green with brushed aluminum housing

Operation

When normal utility power fails, the internal solid-state transfer switch automatically connects the internal battery to the LED lamps, lighting a path of egress for no less than 90 minutes. When utility power is restored the battery is recharged by the onboard solid-state recharger. Full recharge is accomplished within 24 hours.

Specifications and dimensions subject to change. Lumens are delivered unless otherwise noted. See website for most current information.

Recessed Edge-lit Exit/ Emergency Combo



LED Lamp Other Components

- 120V/277V
- Polycarbonate Lens and Waterproof Thermoplastic Housing
- Single or Double Face

- Operating Temp: 10°C to +40°C
- 3.6V, 1800 mAh Ni-MH
- Two Adjustable Heads: 1.5W total | 250 lms total
- Wall, Ceiling or End Mount


- UL Listed for damp location to UL924 standards
- CEC Title 20 Compliant
- LED Lamps: 5 Year Limited Warranty
- Other Components: 1 Year Limited Warranty




RXEL35GBA



RXEL36RBA

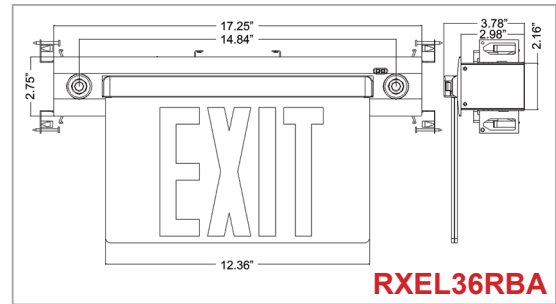

RXEL36RBA

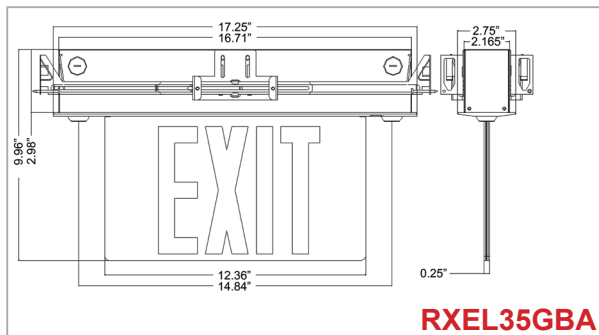

RXEL35GBA

ORDERING GUIDE

Example: RXEL35RBA

Model	Lettering/Housing
RXEL35 Single Faceplate	RBA Red letters, brushed aluminum housing GBA Green letters, brushed aluminum housing
RXEL36 Double Faceplate	

Exit/Emergency Combo, Wet & Cold



LED Lamp Other Components

- 120V/277V
- Polycarbonate Lens and Waterproof Thermoplastic Housing
- Single or Double Face

- Operating Temp: -25°C to +50°C
- 2 x 3.6V, 1000 mAh Ni-Cad Battery
- Adjustable Heads: 2 x 0.75W | 180 lms total
- Wall, Ceiling or End Mount


- UL Listed for damp location to UL924 standards
- CEC Title 20 Compliant
- LED Lamps: 5 Year Limited Warranty
- Other Components: 1 Year Limited Warranty



RXEL25RW
LED red letters with white housing



RXEL25GW
LED green letters with white housing

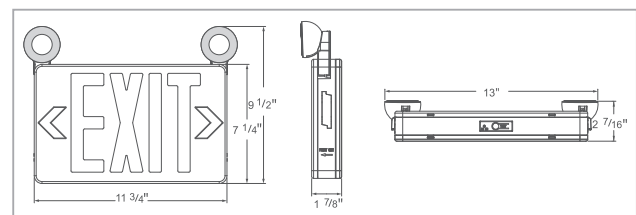

ORDERING GUIDE

Example: RXEL25RW

Model	Lettering/Housing
RXEL25 Two-Head LED Exit/Emergency Combo, Wet & Cold	RW Red with white housing GW Green with white housing

Specifications and dimensions subject to change.
Lumens are delivered unless otherwise noted.
See website for most current information.

Standard Exit/Emergency Combo



LED Lamp
Other Components


- 120V/277V
- Thermoplastic Housing
- Single or Double Face
- Operating Temp 10°C to 40°C
- 3.6V, 900 mAh Ni-Cad Battery
- Adjustable Heads: 2 x 1W | 150 lms total
- Wall, Ceiling or End Mount
- UL Listed for damp location to UL924 standards
- CEC Title 20 Compliant
- LED Lamps: 5 Year Limited Warranty
- Other Components: 1 Year Limited Warranty



RXEL37RW
LED red letters with white housing



RXEL37GW
LED green letters with white housing

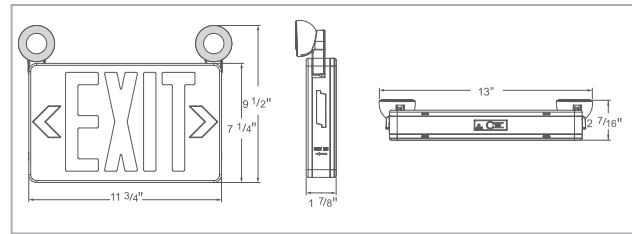

ORDERING GUIDE

Example: RXEL37RW

Model	Lettering/Housing
RXEL37 Standard Exit/ Emergency Combo	RW Red with white housing GW Green with white housing

High Output Exit/Emergency Combo



LED Lamp
Other Components


- 120V/277V
- Thermoplastic Housing
- Single or Double Face
- Wall, Ceiling or End Mount
- Operating Temp: 10°C to 40°C
- 2 x 3.6V, 900 mAh Ni-Cad Battery
- Adjustable Heads: 2 x 2W | 250 lms total
- UL Listed for damp location to UL 924 standards
- CEC Title 20 Compliant
- LED Lamps: 5 Year Limited Warranty
- Other Components: 1 Year Limited Warranty



RXEL38RW
LED red letters with white housing



RXEL38GW
LED green letters with white housing

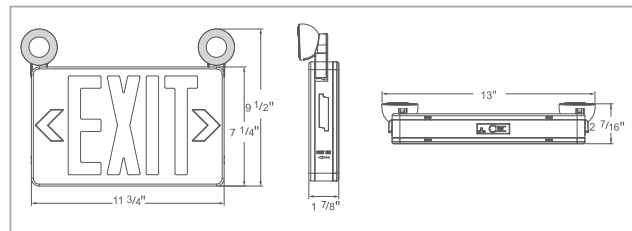

ORDERING GUIDE

Example: RXEL38RW

Model	Lettering/Housing
RXEL38 High Output Exit/ Emergency Combo	RW Red with white housing GW Green with white housing

Specifications and dimensions subject to change.
Lumens are delivered unless otherwise noted.
See website for most current information.

High Output Remote Capable Exit/Emergency Combo




- 120V/277V
- Thermoplastic Housing
- Single or Double Face
- Wall, Ceiling or End Mount
- Operating Temp: 10°C to 40°C
- 2 x 3.6V, 1500 mAh Ni-Cad Battery
- Adjustable Heads: 2 x 2W | 250 lms total
- 3.6V, 1W or 3.6V, 2W Remote Head Available
- UL Listed for damp location to UL 924 standards
- CEC Title 20 Compliant
- LED Lamps: 5 Year Limited Warranty
- Other Components: 1 Year Limited Warranty



RXEL39RW
LED red letters with white housing



RXEL39GW
LED green letters with white housing

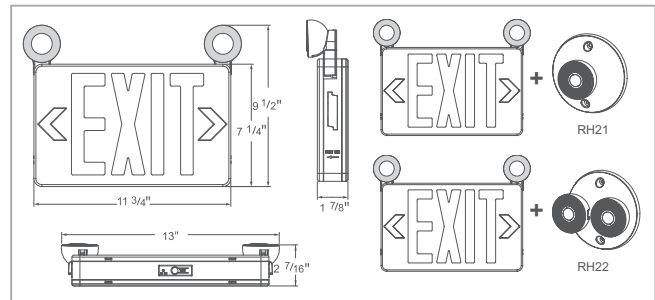

ORDERING GUIDE

Example: RXEL39RW

Model	Lettering/Housing
RXEL39	
High Output Remote Capabe Exit/Emergency Combo	RW Red with white housing GW Green with white housing

High Output Self Diagnostic Exit/Emergency Combo




- 120V/277V
- Thermoplastic Housing
- Single or Double Face
- Wall, Ceiling or End Mount
- Operating Temp: 10°C to 40°C
- 2 x 3.6V, 900 mAh Ni-Cad Battery
- Adjustable Heads: 2 x 2W | 250 lms total
- Self-diagnostic Standard
- UL Listed for damp location to UL924 standards
- CEC Title 20 Compliant
- LED Lamps: 5 Year Limited Warranty
- Other Components: 1 Year Limited Warranty



RXEL40RW-SD
Self-diagnostic LED red letters with white housing



RXEL40GW-SD
Self-diagnostic LED green letters with white housing

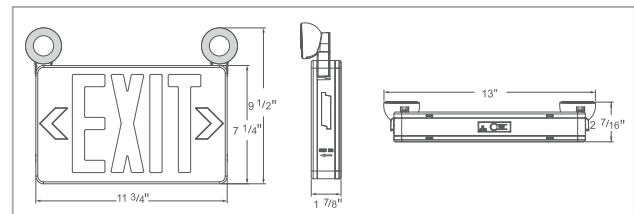

ORDERING GUIDE

Example: RXEL40RW-SD

Model	Lettering/Housing	Self-diagnostic
RXEL40		
High Output Self Diagnostic Exit/Emergency Combo	RW Red with white housing GW Green with white housing	-SD Self-diagnostic Standard

Specifications and dimensions subject to change.
Lumens are delivered unless otherwise noted.
See website for most current information.

Recessed 2-Head Emergency Light




LED Lamp
Other Components

- 120V/277V
- Aluminum Trim Plate & Recessed Housing
- IC Rated for Recessed Ceiling or Wall Mount
- Operating Temp: 10°C to 40°C
- 3.6V, 1800 mAh Ni-MH Battery
- Adjustable Heads: 2 x 1.5W | 250 lms total
- UL Listed for damp location to UL924 standard
- LED Lamp: 5 Year Limited Warranty
- Other Components: 1 Year Limited Warranty



REL35-BA

LED Recessed Emergency Lighting

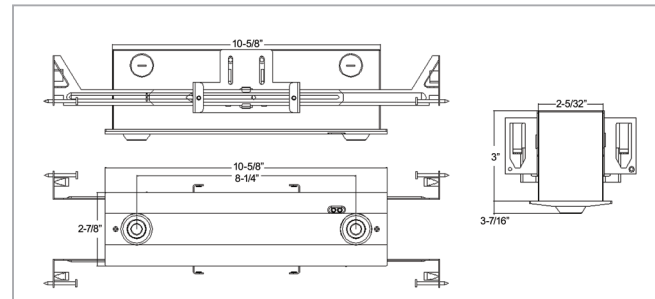

ORDERING GUIDE

Example: REL35-BA

Model	Finish
REL35-	BA Brushed Aluminum

Operation

When normal utility power fails, the internal solid-state transfer switch automatically connects the internal battery to the LED lamps, lighting a path of egress for no less than 90 minutes. When utility power is restored the battery is recharged by the onboard solid-state recharger. Full recharge is accomplished within 12 hours.

Compact Emergency



LED Lamp Other Components


- 120V/277V
- White Thermoplastic Housing
- Adjustable Clear Lens Heads
- Std. Operating Temp: 10°C to 40°C

- Std. 3.6V, 900 mAh Ni-Cad Battery
- Adjustable Heads: 2 x 1W | 160 lms
- Cold Weather Option: -10°C to 40°C
- 3.6V, 1500 mAh Ni-MH Battery

- UL Listed for damp location to UL924 standards
- LED Lamps: 5 Year Limited Warranty
- Other Components: 1 Year Limited Warranty



REL-200

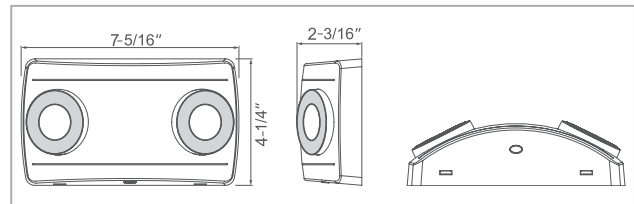

ORDERING GUIDE

Example: REL20

Model	Description
REL20	Wide Lens
REL20-N	Narrow Lens
REL20-C	Wide Lens/Cold Weather
Accessory	Description
REL-200	Wet Location Cover

Compact High Output Emergency



LED Lamp Other Components


- 120V/277V
- Thermoplastic Housing
- Adjustable Clear Lens Heads
- Std. Operating Temp: 10°C to 40°C

- Std. 3.6V, 1500 mAh Ni-Cad Battery
- Adjustable Heads: 2 x 1.5W | 2 x 125 lms
- Cold Weather Option: -10°C to 40°C
- 2 x 3.6V, 1500 mAh Ni-MH Battery

- UL Listed for damp location to UL924 standards
- LED Lamps: 5 Year Limited Warranty
- Other Components: 1 Year Limited Warranty



REL-200

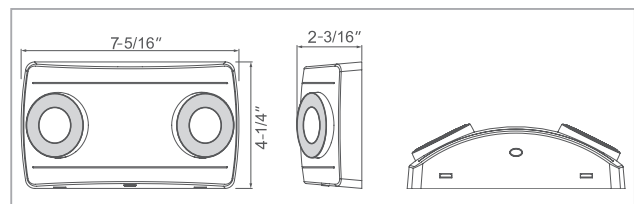

ORDERING GUIDE

Example: REL21

Model	Description
REL21	Wide Lens/White Housing
REL21-BK	Wide Lens/Black Housing
REL21-C	Wide Lens/Cold Weather/White Housing
REL21-N	Narrow Lens/White Housing
Accessory	Description
REL-200	Wet Location Cover

Specifications and dimensions subject to change.
Lumens are delivered unless otherwise noted.
See website for most current information.

Compact High Output Remote Head Capable Emergency




LED Lamp Other Components

- 120V/277V
- White Thermoplastic Housing
- Adjustable Clear Lens Heads
- Adjustable Heads: 2 x 1.4W | 2 x 135 lms
- Std. Operating Temp: 10°C to 40°C
- 3.6V, 1500 mAh Ni-MH Battery
- 3.6V, 1W or 3.6V, 2W Remote Heads Available
- UL Listed for damp location to UL924 standards
- LED Lamps: 5 Year Limited Warranty
- Other Components: 1 Year Limited Warranty



REL-200

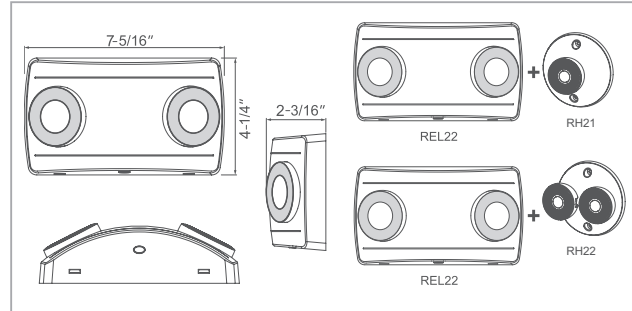

ORDERING GUIDE

Example: REL22

Model	Description
REL22	Wide Lens
REL22-N	Narrow Lens
Accessory	Description
REL-200	Wet Location Cover

Compact High Output Self Diagnostic Emergency




LED Lamp Other Components

- 120V/277V
- White Thermoplastic Housing
- Adjustable Clear Lens Heads
- Adjustable Heads: 2 x 1.4W | 2 x 135 lms
- Std. Operating Temp: 10°C to 40°C
- Std. 3.6V, 900 mAh Ni-Cad Battery
- Cold Weather Option: -10°C to 40°C; 3.6V, 1500 mAh Ni-MH Battery
- Self Diagnostic Standard
- UL Listed for damp location to UL924 standards
- LED Lamps: 5 Year Limited Warrant
- Other Components: 1 Year Limited Warranty



REL-200

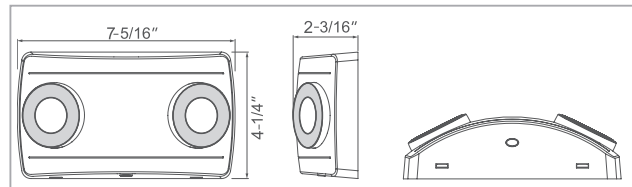

ORDERING GUIDE

Example: REL23-SD

Model	Description
REL23-SD	Wide Lens/Self Diagnostic
REL23-SD-C	Wide Lens/Self Diagnostic/Cold Weather
REL23-N-SD	Narrow Lens/Self Diagnostic
REL23-N-SD-C	Narrow Lens/Self Diagnostic/Cold Weather
Accessory	Description
REL-200	Wet Location Cover


Specifications and dimensions subject to change. Lumens are delivered unless otherwise noted. See website for most current information.

Compact High-Lumen Emergency



LED Lamp Other Components

- 120-277V Universal Voltage
- White Thermoplastic Housing
- High Lumen Adjustable Lens Heads
- Self Diagnostic Option Available
- Std. Operating Temp: 10°C to 40°C
- 9.6V, 3000 mAh LiFePO4 Battery High lumen
- 9.6V, 1500 mAh LiFePO4 Battery Standard lumen
- Std Output Heads: 2 x 2.7W | 600 lms total
- High Output Heads: 2 x 5.4W | 1300 lms
- 3.6V, 1W or 3.6V, 2W Remote Heads Available
- UL Listed for damp location to UL924 standards
- CEC Title 20 Compliant
- LED Lamps: 5 Year Limited Warranty
- Other Components: 1 Year Limited Warranty

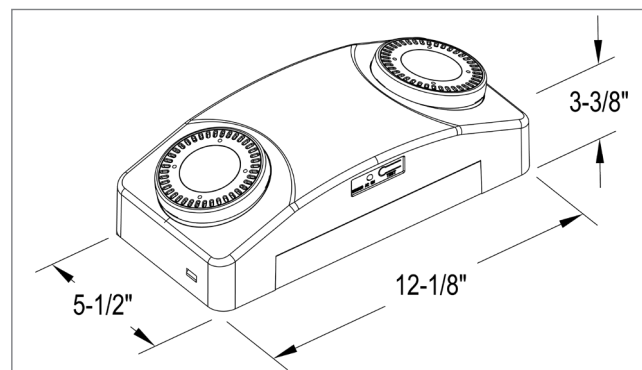

EXIT/EMERGENCY LIGHTING

ORDERING GUIDE

Example: REL6LED-WH


Model	Description
REL6LED-WH	Standard Output
REL6LED-WH-SD	Standard Output/Self Diagnostic
REL6LED-WH-HO	High Output
REL6LED-WH-HO-SD	High Output/Self Diagnostic

*Specifications and dimensions subject to change.
Lumens are delivered unless otherwise noted.
See website for most current information.*

Outdoor Die Cast Emergency



- 120-277V Universal Voltage
- Die Cast Aluminum Housing
- Gasketed Polycarbonate Lens
- Self Diagnostic Standard
- Photosensor Included
- Std. Operating Temp: 0°C to 50°C
- 4.8V, 1800 mAh Ni-Cad Battery
- 15W | 1300 lms | 5000K | 80 CRI
- Cold Weather Option: -20°C to 50°C
- UL Listed for damp location to UL924 standards
- IP65 Rated
- LED Lamps: 5 Year Limited Warranty
- Other Components: 1 Year Limited Warranty



ORDERING GUIDE

Example: REL7LED-OB-C

Model	Finish	Cold Weather Option
REL7LED	-OB Oil Rubbed Bronze -WH White	-C Cold Weather Heatpad


Operation

When normal utility power fails, the internal solid-state transfer switch automatically connects the internal battery to the LED lamps, lighting a path of egress for no less than 90 minutes. When utility power is restored the battery is recharged by the onboard solid-state recharger. Full recharge is accomplished within 12 hours.

Outdoor Full Cutoff Emergency



- 120-277V Universal Voltage
- Die Cast Aluminum Housing
- Gasketed Polycarbonate Lens
- Self Diagnostic Standard
- Photosensor Included
- Std. Operating Temp: 0°C to 50°C
- 7.2V, 2000 mAh Ni-Cad Battery
- 18W | 1750 lms | 4000K | 80 CRI
- Cold Weather Option: -25°C to 50°C
- UL Listed for damp location to UL924 standards
- CEC Title 20 Compliant
- LED Lamps: 5 Year Limited Warranty
- Other Components: 1 Year Limited Warranty

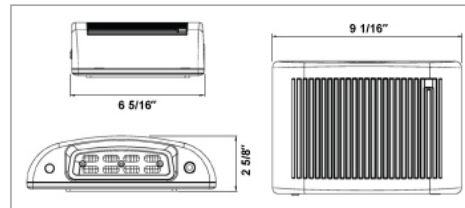

ORDERING GUIDE

Example: REL5LED-OB-C

Model	Finish	Cold Weather Option
REL5LED	-OB Oil Rubbed Bronze -WH White	-C Cold Weather Heatpad

Operation

An ultra slim profile, integrated photocell, cold weather heatpad and emergency battery with self-diagnostics. The design provides emergency lighting that increases safety, security, and visibility in commercial and industrial applications.

Specifications and dimensions subject to change. Lumens are delivered unless otherwise noted. See website for most current information.



Wet Location Remote Heads



- White Thermoplastic ABS Housing
- Adjustable Heads

- DC 3V - 12V Input
- LED Lamp: 1 x 1W | 2 x 1W
- Fits Standard Electrical Box

- UL Listed for wet location
- LED Lamp: 5 Year Limited Warranty
- Other Components: 1 Year Limited Warranty

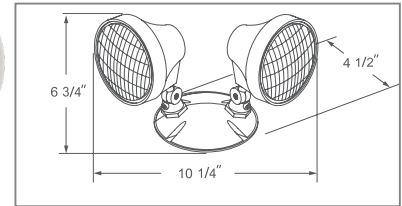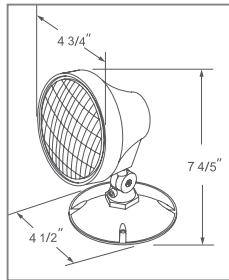

ORDERING GUIDE

Example: RH17

Model	Description
RH17	Single Wet Remote Head
RH18	Double Wet Remote Heads



Indoor Remote Heads



- White Thermoplastic ABS Housing
- Adjustable Heads: Narrow and Wide Lens

- DC 3.6V Input
- LED Lamp: 1 x 1W | 2 x 1W
- Fits Standard Electrical Box

- UL Listed for damp location
- LED Lamp: 5 Year Limited Warranty
- Other Components: 1 Year Limited Warranty

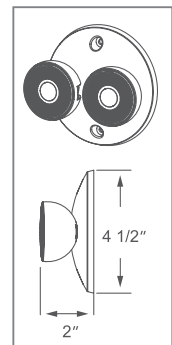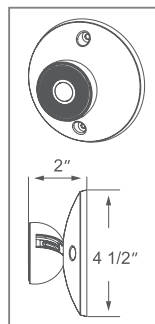

ORDERING GUIDE

Example: RH21


Model	Description
RH21	Single Head/Wide Lens
RH21-N	Single Head/Narrow Lens
RH22	Double Head/Wide Lens
RH22-N	Double Head/Narrow Lens

Specifications and dimensions subject to change.
Lumens are delivered unless otherwise noted.
See website for most current information.

Constant Power Emergency LED Battery Back-up



- 120-277 Universal Voltage
- Operates for minimum 90 minutes when normal power fails
- Operating Temp: 10°C to 50°C
- 9.6V, 3000 mAh LiFePO4 Battery
- AC Input Power: 7W
- Output Power: 12W Constant Power
- Output Voltage: 10-60VDC
- UL Listed to UL924 Standard
- Field or Factory Installation (Indoor/Damp)
- IC Rated for use in Plenum
- 1 Year Limited Warranty

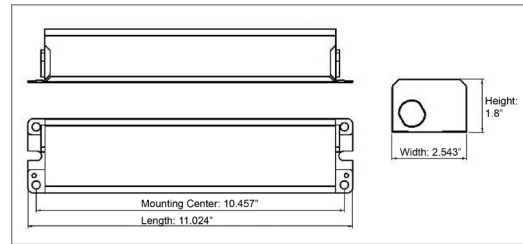

ORDERING GUIDE

Model
4783EM


Operation

Universal Battery Back-up for AC and DC LED fixtures in case of power failure.

Emergency LED Battery Back-up



- 120-277V Universal Voltage
- Operates 120V LED (120V) or DC LED (with driver) for minimum 90 minutes when normal power fails
- Operating Temp: 0°C to 50°C
- 11.1V, 2600 mAh Li-Ion Battery
- AC Input Power: 3.5W
- Output Power: 9W (+/-10%)
- Output Voltage: 24V - 120V DC
- cULus Listed to UL924 Standard
- Field or Factory Installation (Indoor/Damp)
- 1 Year Limited Warranty

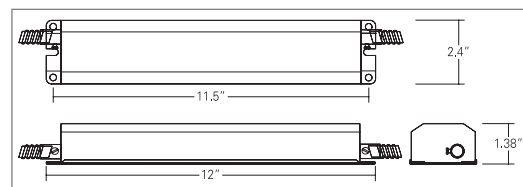

ORDERING GUIDE

Model
4782EM


Universal Battery Back-up for AC and DC LED fixtures in case of power failure.

Specifications and dimensions subject to change.
Lumens are delivered unless otherwise noted.
See website for most current information.

7" LED Flush Mount Emergency Back-up



- 120V - 60Hz
- For use with 8536 or 8539 Disks Only
- Non-Switch Loads Only (Always On)
- Emergency Output - 600 nominal lumens
- Operating Temperature - 0°C to +55°C
- 11.1V , 2600 mAh Ni-MH Battery
- 4785EM: UL Listed for damp location to UL924 standards
- 1 Year Limited Warranty

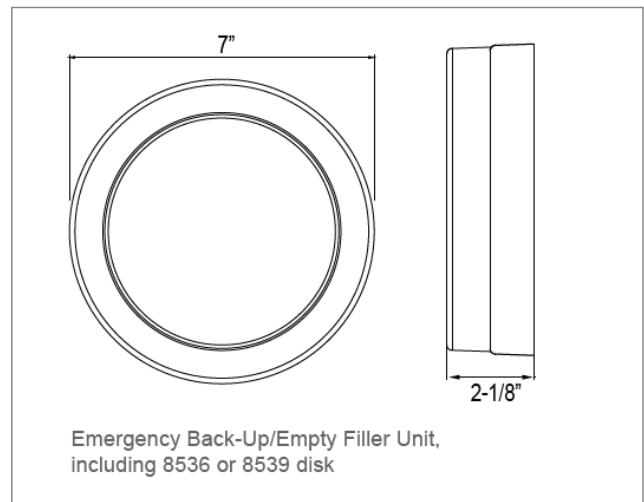

see 8536 or 8539 for
Compatible Disks
pg 108


*Specifications and dimensions subject to change.
Lumens are delivered unless otherwise noted.
See website for most current information.*

ORDERING GUIDE

Example: 4785EM

Model	Description
4785EM	EM Batter Backup with Test Switch
4785F	Empty Filler Housing Only

Outdoor Lighting

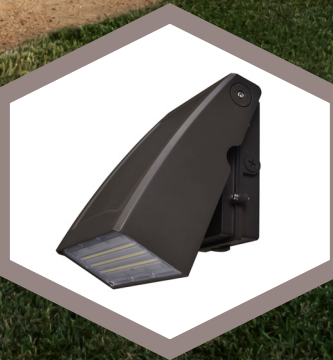

Outdoor Lighting Overview



4423
3" LED Architectural
Cylinder Downlight
Page 171



4424
3" LED Architectural Cylinder
Up & Downlight
Page 171



4425
4" LED Architectural
Cylinder Downlight
Page 172



4426
4" LED Architectural Cylinder
Up & Downlight
Page 172



4427
4" LED Architectural Square
Cylinder Downlight
Page 173



4428
4" LED Architectural Square
Cylinder Up & Downlight
Page 173



4420
9" Outdoor LED Bulkhead
Page 174



4421
9" Outdoor LED Bulkhead
Page 174



4422
9" Outdoor LED Bulkhead
Page 174

Outdoor Lighting Overview



4429
Outdoor Wall Pack
Page 175



4432-1
Adjustable Full-Cutoff Wall Pack
Page 175



4715
11" Wet Location Ceiling Mount
Page 176



4401
Residential Outdoor Wall
Mount
Page 177



4433
Residential Outdoor Wall
Mount
Page 177



4406-30
Outdoor Wall Sconce
Page 178



4405
Outdoor Wall Lantern
Page 179



4407
Outdoor Wall Lantern
Page 180



4408
Outdoor Cone Wall Mount
Page 181

Warranty Information



Integrated LED Lights




Other Components


3" LED Architectural Cylinder Downlight



- 120V - 60Hz
- 3000K or 4000K | 80 CRI
- Dimmable TRIAC, 5% -100%
- Die Cast Aluminum with acrylic diffuser
- Operating Temp: -30°C to +40°C
- 13W | 845 lms
- 17W | 1105 lms
- cCSAus Listed for wet location
- LED Lamp: 5 Year Limited Warranty
- Other Components: 1 Year Limited Warranty

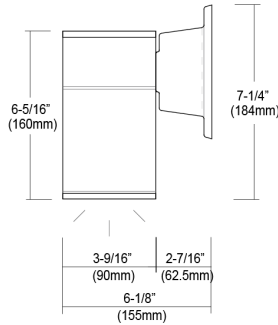

Oil Rubbed Bronze (OB)

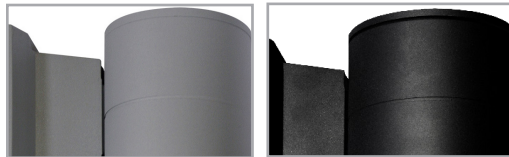


Brushed Aluminum (BA) Black (BK)

ORDERING GUIDE		Example: 4423BK-17-3K	
Model	Finish	Watts	CCT
4423	BK Black	-13 13W	-3K 3000K
	BA Brushed Aluminum	-17 17W	-4K 4000K
	OB Oil Rubbed Bronze		


3" LED Architectural Cylinder Up & Downlight



- 120V - 60Hz
- 3000K or 4000K | 80 CRI
- Dimmable TRIAC, 5% -100%
- Die Cast Aluminum with acrylic diffuser
- Operating Temp: -30°C to +40°C
- 13W | 845 lms per side
- 17W | 1105 lms per side
- cCSAus Listed for wet location
- LED Lamp: 5 Year Limited Warranty
- Other Components: 1 Year Limited Warranty

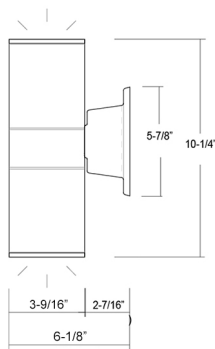

Oil Rubbed Bronze (OB)

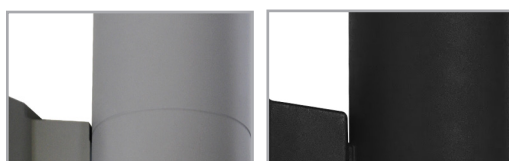

Brushed Aluminum (BA) Black (BK)


ORDERING GUIDE		Example: 4424OB-13-4K	
Model	Finish	Watts	CCT
4424	BK Black	-13 13W	-3K 3000K
	BA Brushed Aluminum	-17 17W	-4K 4000K
	OB Oil Rubbed Bronze		

Specifications and dimensions subject to change.
Lumens are delivered unless otherwise noted.
See website for most current information.


4" LED Architectural Cylinder Downlight



- 120V - 60Hz
- 3000K or 4000K | 80 CRI
- Dimmable TRIAC, 5% -100%
- Die Cast Aluminum with acrylic diffuser
- Operating Temp: -30°C to +40°C
- 13W | 845 lms
- 17W | 1105 lms
- 27W | 1755 lms
- cCSAus Listed for wet location
- LED Lamp: 5 Year Limited Warranty
- Other Components: 1 Year Limited Warranty



Oil Rubbed Bronze (OB)

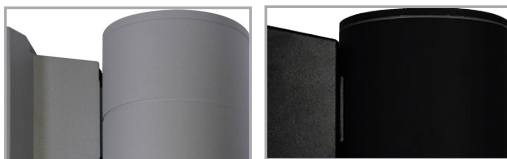


Brushed Aluminum (BA) Black (BK)

ORDERING GUIDE		Example: 4425BA-27-4K	
Model	Finish	Watts	CCT
4425	BK Black	-13 13W	-3K 3000K
	BA Brushed Aluminum	-17 17W	-4K 4000K
	OB Oil Rubbed Bronze	-27 27W	


4" LED Architectural Cylinder Up & Downlight



- 120V - 60Hz
- 3000K or 4000K | 80 CRI
- Dimmable TRIAC, 5% -100%
- Die Cast Aluminum with acrylic diffuser
- Operating Temp: -30°C to +40°C
- 13W | 845 lms per side
- 17W | 1105 lms per side
- 27W | 1755 lms per side
- cCSAus Listed for wet location
- LED Lamp: 5 Year Limited Warranty
- Other Components: 1 Year Limited Warranty

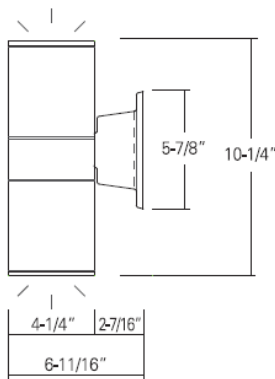

Oil Rubbed Bronze (OB)

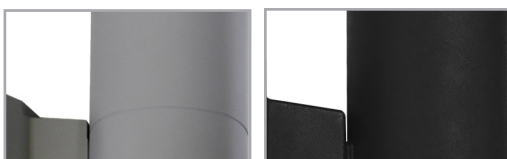

Brushed Aluminum (BA) Black (BK)



ORDERING GUIDE		Example: 4426OB-13-4K	
Model	Finish	Watts	CCT
4426	BK Black	-13 13W	-3K 3000K
	BA Brushed Aluminum	-17 17W	-4K 4000K
	OB Oil Rubbed Bronze	-27 27W	

Specifications and dimensions subject to change. Lumens are delivered unless otherwise noted. See website for most current information.

4" LED Architectural Square Cylinder Downlight



- 120V - 60Hz
- 3000K or 4000K | 80 CRI
- Dimmable TRIAC, 5% -100%
- Die Cast Aluminum with acrylic diffuser
- Operating Temp: -30°C to +40°C
- 13W | 845 lms
- 17W | 1105 lms
- 27W | 1755 lms
- cCSAus Listed for wet location
- LED Lamp: 5 Year Limited Warranty
- Other Components: 1 Year Limited Warranty

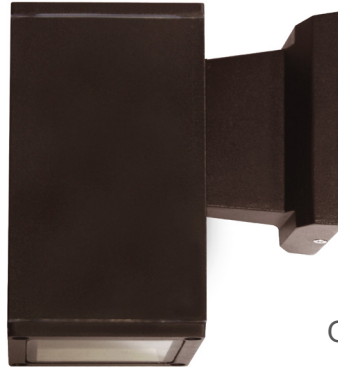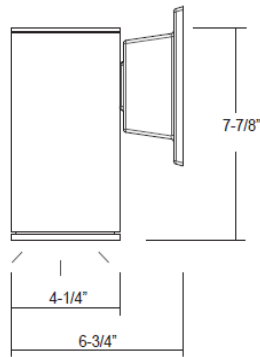

Oil Rubbed Bronze (OB)



Brushed Aluminum (BA) Black (BK)


ORDERING GUIDE Example: 4427BK-17-3K

Model	Finish	Watts	CCT
4427	BK Black	-13 13W	-3K 3000K
	BA Brushed Aluminum	-17 17W	-4K 4000K
	OB Oil Rubbed Bronze	-27 27W	

4" LED Architectural Square Cylinder Up & Downlight



- 120V - 60Hz
- 3000K or 4000K | 80 CRI
- Dimmable TRIAC, 5% -100%
- Die Cast Aluminum with acrylic diffuser
- Operating Temp: -30°C to +40°C
- 13W | 845 lms per side
- 17W | 1105 lms per side
- 27W | 1755 lms per side
- cCSAus Listed for wet location
- LED Lamp: 5 Year Limited Warranty
- Other Components: 1 Year Limited Warranty

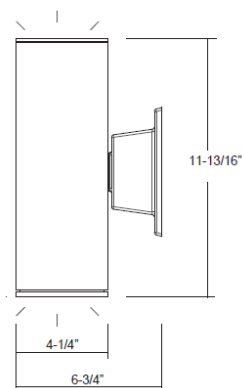

Oil Rubbed Bronze (OB)



Brushed Aluminum (BA) Black (BK)

ORDERING GUIDE Example: 4428BK-17-3K

Model	Finish	Watts	CCT
4428	BK Black	-13 13W	-3K 3000K
	BA Brushed Aluminum	-17 17W	-4K 4000K
	OB Oil Rubbed Bronze	-27 27W	

Specifications and dimensions subject to change.
Lumens are delivered unless otherwise noted.
See website for most current information.

9" Outdoor LED Bulkhead



- 120V - 60Hz
- 3000K or 4000K | 80 CRI
- Dimmable TRIAC, 5% -100%
- Die Cast Aluminum with Gasketed, frosted acrylic diffuser
- Operating Temp: -30°C to +40°C
- 4420: 15W | 850 lms
- 4421: 15W | 700 lms
- 4422: 15W | 650 lms
- Energy Star Listed
- cCSAus Listed for wet location
- LED Lamp: 5 Year Limited Warranty
- Other Components: 1 Year Limited Warranty



Black (BK)

4420



Black (BK)

4421



Black (BK)

4422

4420



Oil Rubbed Bronze (OB)

4421




Oil Rubbed Bronze (OB)

4422



Oil Rubbed Bronze (OB)

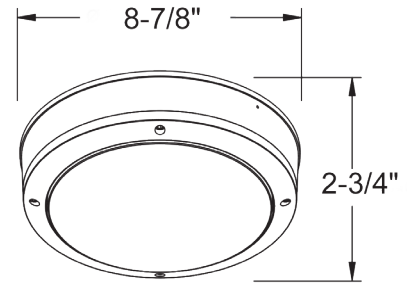

Brushed Aluminum (BA)



Brushed Aluminum (BA)



Brushed Aluminum (BA)

ORDERING GUIDE

Example: 4420BA

Model	Finish	
4420	BK	Black
4421	BA	Brushed Aluminum
4422	OB	Oil Rubbed Bronze

Specifications and dimensions subject to change. Lumens are delivered unless otherwise noted. See website for most current information.


Outdoor Wall Pack



- 120V - 60Hz
- 4000K or 5000K | 80 CRI
- Die Cast Aluminum housing with hinged door frame
- Gasketed Clear Stippled Glass Lens
- Operating Temp: -30°C to +40°C
- 0-10V Dimming
- 45W | 4050 lms
- 70W | 6300 lms
- cCSAus Listed for wet location
- LED Lamp: 5 Year Limited Warranty
- Other Components: 1 Year Limited Warranty



Oil Rubbed Bronze (OB)

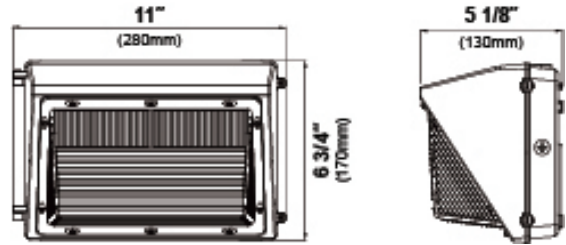

ORDERING GUIDE

Example: 4429OB-45-4K

Model	Finish	Watts	CCT
4429	OB Oil Rubbed Bronze	-45 45W -70 70W	-4K 4000K -5K 5000K


Adjustable Full-Cutoff Wall Pack



- 120-277V - 60 Hz
- 4000K or 5000K | 80 CRI
- Die Cast Aluminum with fresnel lens
- 0°C to 90°C Adjustable | Integrated Photocell
- Operating Temp: -40°C to 40°C
- 30W | 3600 lms | 150W HID Equivalent
- 60W | 7200 lms | 250W HID Equivalent
- 80W | 9600 lms | 350W HID Equivalent
- cETLus Listed for wet location
- IP65 Listed | DLC Listed
- LED Lamp: 5 Year Limited Warranty
- Other Components: 1 Year Limited Warranty



Oil Rubbed Bronze (OB)

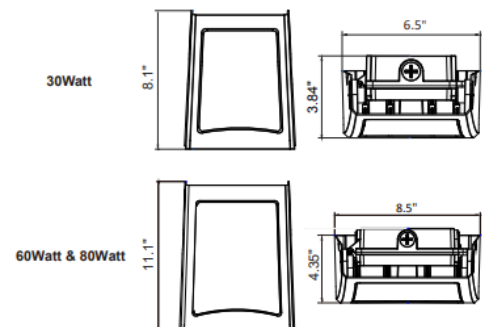

ORDERING GUIDE

Example: 4432-1OB-30-4K

Model	Finish	Watts	CCT
4432-1	OB Oil Rubbed Bronze	-30 30W -60 60W -80 80W	-4K 4000K -5K 5000K

Specifications and dimensions subject to change.
Lumens are delivered unless otherwise noted.
See website for most current information.

11" Wet Location Ceiling Mount




Intertek


LED Lamp

Other Components

- 120V - 60Hz
- 3000K | 80 CRI
- Polycarbonate housing and diffuser
- Operating Temp: -20°C to 40°C
- 17W | 800 lms
- 11" D x 3-1/2" H
- cETLus Listed for wet location
- LED Lamp: 5 Year Limited Warranty
- Other Components: 1 Year Limited Warranty



Oil Rubbed Bronze (OB)



Brushed Aluminum (BA)

ORDERING GUIDE Example: 4715BK

Model	Finish	
4715	BK	Black
	BA	Brushed Aluminum
	OB	Oil Rubbed Bronze

Specifications and dimensions subject to change.
Lumens are delivered unless otherwise noted.
See website for most current information.

Residential Outdoor Wall Mount



- 120V - 60Hz
- 3000K | 80 CRI
- 0-10V Dimming
- Integrated Photocell

- Steel construction with acrylic lens
- Operating Temp: -20°C to 40°C
- 15W | 1050 lms
8" x 12-1/4" x 5-1/8"

- cETLus Listed for wet location
- LED Lamp: 5 Year Limited Warranty
- Other Components: 1 Year Limited Warranty



Black (BK)

ORDERING GUIDE Example: 4401LED-BA

Model	Finish
4401LED	BK Black

Residential Outdoor Wall Mount



- 120V - 60Hz
- 4000K | 80 CRI
- Aluminum with acrylic lens
- Integrated Photocell

- 15W | 1050 lms
10-1/2" x 6" x 4-1/2"
- 25W | 1500 lms
13" x 7-1/2" x 5"

- cETLus Listed for wet location
- LED Lamp: 5 Year Limited Warranty
- Other Components: 1 Year Limited Warranty



Oil Rubbed Bronze (OB)

ORDERING GUIDE Example: 4433OB-15-4K

Model	Finish	Watts	CCT
4433	BK Black	-15 15W	-4K 4000K
	OB Oil Rubbed Bronze	-25 25W	

Specifications and dimensions subject to change.
Lumens are delivered unless otherwise noted.
See website for most current information.

Outdoor Wall Sconce



- 120V - 60Hz
- 3000K | 80 CRI
- Steel construction with acrylic lens
- Operating Temp: -20°C to 40°C
- Integrated Photocell
- 15W | 800 lms
- 7" W x 9-7/8" H x 3-3/8" D
- cETLus Listed for wet location
- Energy Star Listed
- LED Lamp: 5 Year Limited Warranty
- Other Components: 1 Year Limited Warranty



Black (BK)



Oil Rubbed Bronze (OB)



Brushed Aluminum (BA)

ORDERING GUIDE Example: 4406-30-BA

Model	Finish
4406-30	-BA Brushed Aluminum
	-BK Black
	-OB Oil Rubbed Bronze



see 4404-30 for
Indoor use
pg 122

*Specifications and dimensions subject to change.
Lumens are delivered unless otherwise noted.
See website for most current information.*

Outdoor Wall Lantern



- 120V - 60Hz
- 3000K | 90 CRI
- Integrated Photocell
- Steel construction with clear bubble glass lens
- Operating Temp: -20°C to 40°C
- 1 x 9W E26 A19 LED Lamp Included
- 11-1/2" x 6" x 8"
- cELTus Listed for wet location
- Energy Star Listed
- CEC JA8 Compliant
- 1 Year Limited Warranty



ORDERING GUIDE

Example: 4405BK-E26

Model	Finish	
4405	BK Black	-E26 9W A19 LED Lamp Included

Specifications and dimensions subject to change.
 Lumens are delivered unless otherwise noted.
 See website for most current information.

Outdoor Wall Lantern



- 120V - 60Hz
- 3000K | 90 CRI
- Dimmable TRIAC, 10-100%
- Aluminum construction with frosted glass lens
- Operating Temp: -20°C to 40°C
- 1 x 9W E26 A19 LED Lamp Included
- 4-5/8" x 6" x 8-1/2"
- cELTus Listed for wet location
- Energy Star Listed
- CEC JA8 Compliant
- 1 Year Limited Warranty



ORDERING GUIDE

Example: 4407BK-E26

Model	Finish	
4407	BK Black	-E26 9W A19 LED Lamp Included

Specifications and dimensions subject to change.
Lumens are delivered unless otherwise noted.
See website for most current information.

Outdoor Cone Wall Mount



- 120V - 60Hz
- 3000K | 90 CRI
- Dimmable TRIAC, 10-100%
- Steel construction
- Operating Temp: -20°C to 40°C
- 1 x 9W E26 A19 LED Lamp Included
- 10-1/2" x 11-5/8" x 8-3/4"
- cELTus Listed for wet location
- Energy Star Listed
- CEC JA8 Compliant
- 1 Year Limited Warranty



OUTDOOR LIGHTING

ORDERING GUIDE

Example: 4408BK-E26

Model	Finish	
4408	BK Black	-E26 9W A19 LED Lamp Included

Specifications and dimensions subject to change.
Lumens are delivered unless otherwise noted.
See website for most current information.

Step Lighting



Louvered Outdoor LED Step Light



LED Lamp Other Components

- 120V - 60Hz
- 3000K | 80 CRI
- LED 5W | 60 lms
- 4-3/4" H x 9-3/8" W x 3-1/2" D
- Louvered metal front cover with clear glass lens
- Horizontal Mount Only
- Mounts in 5-gang electrical box for direct pour concrete
- cETLus Listed for wet location
- IC Rated for non-cellulose insulation
- LED Lamp: 5 Year Limited Warranty
- Other Components: 1 Year Limited Warranty



Black (BK)



White (WH)



Brushed Aluminum (BA)

ORDERING GUIDE Example: 8924WH

Model	Finish	
8924	BA	Brushed Aluminum
	BK	Black
	WH	White

Mini Louvered Outdoor LED Step Light



LED Lamp Other Components

- 120V - 60Hz
- 3000K | 80 CRI
- LED 3W | 45 lms
- 4-1/2" H x 2-3/4" W x 3/4" D
- Louvered metal front cover with clear glass lens
- Horizontal and Vertical Mount
- Mounts in 5-gang electrical box for direct pour concrete
- cETLus Listed for wet location
- IC rated for non-cellulose insulation
- LED Lamp: 5 Year Limited Warranty
- Other Components: 1 Year Limited Warranty



Brushed Aluminum (BA)



White (WH)



Black (BK)

ORDERING GUIDE Example: 8918WH

Model	Finish	
8918	BA	Brushed Aluminum
	BK	Black
	WH	White

Specifications and dimensions subject to change.
Lumens are delivered unless otherwise noted.
See website for most current information.


Mini Outdoor LED Step Light




- 120V - 60Hz
- 8919-1: 3000K | 80 CRI
- 8919-18K: 1800K | 80 CRI
- LED 5W | 215 lms
- 2-7/8" H x 4-3/4" W x 3/4" D
- Louvered metal front cover with acrylic lens
- Horizontal
- Mounts in a single gang electrical box
- cETLus Listed for wet location
- IC rated for non-cellulose insulation
- LED Lamp: 5 Year Limited Warranty
- Other Components: 1 Year Limited Warranty



Oil Rubbed Bronze (OB)



Black (BK)



White (WH)

ORDERING GUIDE Example: 8919WH-1

Model	Finish	Version
8919	BK Black	-1
	OB Oil Rubbed Bronze	
	WH White	
Model	Finish	Version
8919	BK Black	-18K
	OB Oil Rubbed Bronze	
	WH White	

Mini Lens Outdoor LED Step Light




- 120V - 60Hz
- 3000K | 80 CRI
- LED 4W | 120 lms
- 5" W x 3-1/8" H
- Aluminum front cover with glass lens
- Horizontal or Vertical Mount
- Mounts in a single gang electrical box
- cETLus Listed for wet location
- IC rated for non-cellulose insulation
- LED Lamp: 5 Year Limited Warranty
- Other Components: 1 Year Limited Warranty




Oil Rubbed Bronze (OB)



Brushed Aluminum (BA)



White (WH)



Black (BK)

ORDERING GUIDE Example: 8918WH

Model	Finish
8920	BA Brushed Aluminum
	BK Black
	OB Oil Rubbed Bronze
	WH White

Specifications and dimensions subject to change. Lumens are delivered unless otherwise noted. See website for most current information.



Track Lighting



Track Lighting Overview



7553
Round Flat Back
Page 188



7554
Square Flat Back
Page 188



7577
Round Back
Page 188



7574
Flair Shallow Profile
Page 188



7575
Flair Shallow Profile
Page 188



7576
Flair Shallow Profile
Page 188



7578
Tech Form
Page 189



7579, 7580
Tech Form
Page 189



7526
Gimbal Ring
Page 189



7551
Mesh Roundback Head
Page 189



7528
Gimbal Ring
Page 189



7586
Tech Form
Page 190



7587, 7588
Tech Form
Page 190



7584
Round Back
Page 190



7589
Flaired Shallow Profile
Page 190



7953, 7953-4
Track Pack, LED Track Heads
Page 191



7594
Suspended Decorative Glass
Page 191



49354-3K
3 Head Light Bar
Page 192



49353-3K
4 Head Light Bar
Page 192



49355, 4956
5 and 6 Head Light Bars
Page 193

Warranty Information



Integrated LED Lights



Other Components

Specifications and dimensions subject to change.
Lumens are delivered unless otherwise noted.
See website for most current information.


Track Heads



Intertek

The small-size heads provide a compact lighting solution for residential, retail, and commercial applications. With a variety of standard finishes, simple dimmable LED lamps, and J-track compatibility these fixtures offer solid flexibility for many needs.

- 120V Operating Voltage
- 3000K | 90 CRI
- Dimmable TRIAC, 15-100%
- 38° Beam Spread
- J-track Compatible
- Factory Conversion to H-track Compatible Available
- Polycarbonate Lens
- LED Lamp Included
- cETLus Listed for dry location
- 5 Year Limited Warranty



Finishes Available: White (WH), Black (BK), Brushed Aluminum (BA)

7553WH, BK, BA

Round Flat Back
8W | 650 lms



A	B	C
4-1/2"	2-3/4"	2-1/4"

7574WH, BK, BA

Flair Shallow Profile
10W | 730 lms



A	B	C
4-1/4"	4-1/4"	3-1/4"

7554WH, BK, BA

Square Flat Back
8W | 650 lms



A	B	C
4-1/2"	2-3/4"	2-1/4"

7575WH, BK, BA

Flair Shallow Profile
10W | 730 lms



A	B	C
4-1/4"	4-1/4"	3-1/4"

7577WH, BK, BA

Round Back
10W | 645 lms



A	B	C
4-1/4"	3-3/4"	2-1/2"

7576WH, BK, BA

Flair Shallow Profile
15W | 900 lms



A	B	C
4"	6-7/8"	5-3/8"


Specifications and dimensions subject to change.
Lumens are delivered unless otherwise noted.
See website for most current information.

Track Heads



The small-size heads provide a compact lighting solution for residential, retail, and commercial applications. With a variety of standard finishes, simple dimmable LED lamps, and J-track compatibility these fixtures offer solid flexibility for many needs.

- 120V Operating Voltage
- 3000K | 90 CRI
- Dimmable TRIAC, 15-100%
- J-track Compatible
- Factory Conversion to H-track Compatible Available
- LED Lamp Included
- cETLus Listed for dry location
- 5 Year Limited Warranty



Finishes Available: White (WH), Black (BK), Brushed Aluminum (BA)

7578WH, BK, BA

Tech Form
12W | 800 lms

A	B	C
6-1/4"	4-1/2"	2-5/8"



7580WH, BK, BA

Tech Form
20W | 1300 lms

A	B	C
7-1/2"	5-1/4"	4"



7579WH, BK, BA

Tech Form
12W | 800 lms

A	B	C
7-1/2"	5-1/4"	4"




Track Heads



The small-size heads provide a compact lighting solution for residential, retail, and commercial applications.

- 120V Operating Voltage
- J-track Compatible
- Factory Conversion to H-track Compatible Available
- Lamps Not Included
- UL Listed for dry location
- 1 Year Limited Warranty



Finishes Available: White (WH), Black (BK), Brushed Aluminum (BA)

7526WH, BK, BA

Gimbal Ring
75W PAR30

A	B	C
7-1/4"	4-7/8"	3-15/16"



7528WH, BK, BA

Gimbal Ring
50W PAR20

A	B	C
6-1/2"	4-1/4"	2-5/8"



7551GWH, GBA

Mesh Roundback Head
50W GU10 lamp

A	B	C
4-1/2"	2-3/4"	2-3/16"




Specifications and dimensions subject to change.
Lumens are delivered unless otherwise noted.
See website for most current information.

Track Heads



The small-size heads provide a compact lighting solution for residential, retail, and commercial applications. With a variety of standard finishes, simple dimmable LED lamps, and J-track compatibility these fixtures offer solid flexibility for many needs.

- 120V Operating Voltage
- 3000K | 90 CRI
- Dimmable TRIAC, 15-100%
- J-track Compatible
- Factory Conversion to H-track Compatible Available
- Polycarbonate Lens
- LED Lamp Included
- cETLus Listed for dry location
- 5 Year Limited Warranty



Finishes Available: White (WH), Black (BK), Brushed Aluminum (BA)

7586WH, BK, BA

Tech Form
8W | 700 lms | 36° Beam Spread

A	B	C
4-4/5"	2-9/10"	2-4/5"



7584WH, BK, BA

Round Back
10W | 800 lms | 40° Beam Spread

A	B	C
3-5/8"	2-7/10"	2-1/2"



7587WH, BK, BA

Tech Form
20W | 1600 lms | 36° Beam Spread

A	B	C
4-2/5"	4-2/5"	2-4/5"



7589WH, BK, BA

Flaired Shallow Profile
15W | 1200 lms | 40° Beam Spread

A	B	C
4.25"	4-3/5"	3-7/10"



7588WH, BK, BA

Tech Form
28W | 2016 lms | 36° Beam Spread

A	B	C
6"	5-2/5"	5"




Specifications and dimensions subject to change.
Lumens are delivered unless otherwise noted.
See website for most current information.

Track Pack with LED Track Heads



- 120V Operating Voltage
- 3000K | 90 CRI
- Dimmable TRIAC, 15-100%
- J-track Compatible
- Acrylic Lens
- Each head: 8W | 650 lms
- LED lamps included
- cETLus Listed for dry location
- 5 Year Limited Warranty



Finishes Available: White (WH), Black (BK), Brushed Aluminum (BA)

7953WH, BK, BA

- Included In a Single Box:
- 1 - 4' track (7604)
- 1 - Floating Feed (7629)
- 3 - Round Flat Back Heads (7553)

A	B	C
4-1/2"	2-3/4"	2-1/4"



7953-4WH, BK, BA

- Included In a Single Box:
- 1 - 4' track (7604)
- 1 - Floating Feed (7629)
- 4 - Round Flat Back Heads (7553)

A	B	C
4-1/2"	2-3/4"	2-1/4"



LED Suspended Decorative Glass



- 120V Operating Voltage
- 3000K | 90 CRI
- Dimmable TRIAC, 15-100%
- J-track Compatible
- 6' Adjustable Hanging Cord
- Use RPL+F Track (sold separately)
- 7W | 450 lms | LED Lamp Included
- cETLus Listed for dry location
- 5 Year Limited Warranty


Finishes Available: White glass with Brushed Aluminum Cord (WBA), Amber Glass with Brushed Aluminum Cord (ABA)



7594ABA



7594WBA

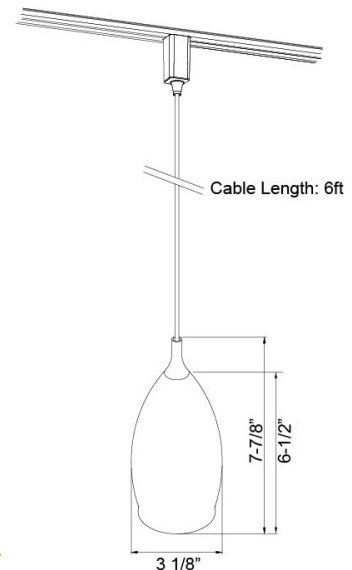

Specifications and dimensions subject to change.
Lumens are delivered unless otherwise noted.
See website for most current information.

3 or 4 Head Light Bar



Contemporary, clean and cool, this eye-catching LED light bar incorporates a subtle wave, providing an instant touch of classic, yet modern design. An ideal choice for enhancing the look and feel of almost any interior space, great for residential kitchens, bars, and hospitality applications.

- 120V Operating Voltage
- 3000K | 80 CRI
- Dimmable TRIAC, 10-100%
- 330° Horizontal Head Rotation
- 90° Vertical Head Rotation
- 74° Beam Spread
- LED Lamps Included
- Energy Star Listed
- cETLus Listed for damp location
- 5 Year Limited Warranty



49354-3K-BN

Available in Brushed Nickel (BN)
3-Track Heads | 15W | 950 total lms



49353-3K-BN

Available in Brushed Nickel (BN)
4-Track Heads | 20W | 1481 total lms

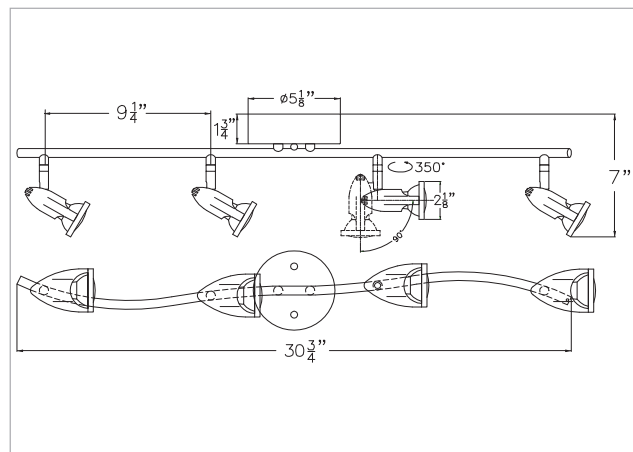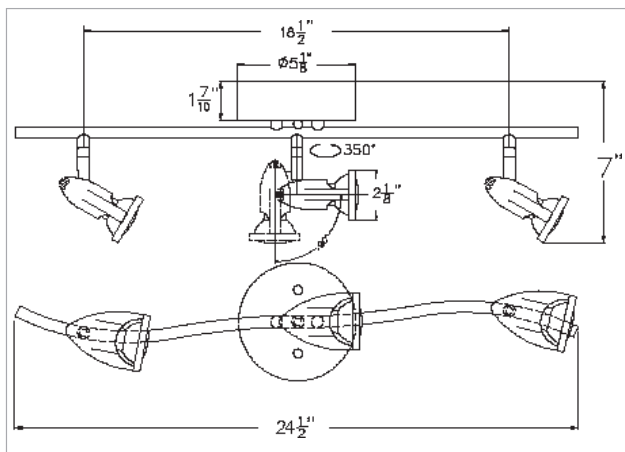

Specifications and dimensions subject to change.
Lumens are delivered unless otherwise noted.
See website for most current information.

5 or 6 Head Light Bar



Contemporary, clean and cool, this eye-catching LED light bar incorporates a subtle wave, providing an instant touch of classic, yet modern design. An ideal choice for enhancing the look and feel of almost any interior space, great for residential kitchens, bars, and hospitality applications.

- 120V Operating Voltage
- 3000K | 80 CRI
- Dimmable TRIAC, 10-100%
- 330° Horizontal Head Rotation
- 90° Vertical Head Rotation
- 74° Beam Spread
- LED Lamps Included
- cETLus Listed for damp location
- 5 Year Limited Warranty



49355BN

Available in Brushed Nickel (BN)
5-Track Heads | 22W |
1400 total lms



49356BN

Available in Brushed Nickel (BN)
6-Track Heads | 28W |
1750 total lms

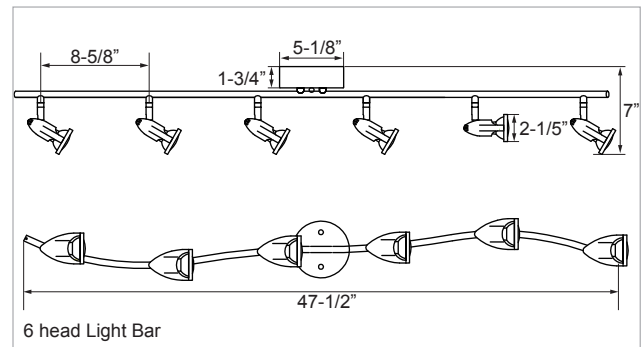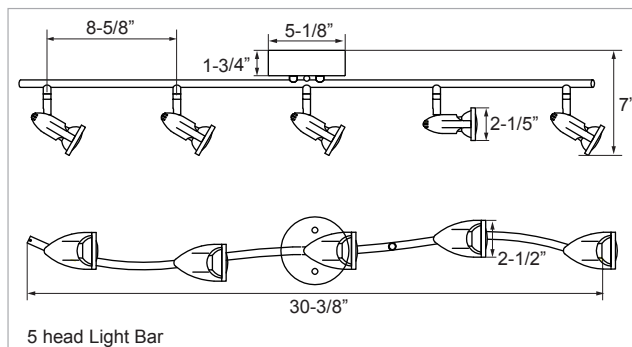

Track Section




RP Lighting's J-track is designed to be affordable yet flexible to provide dramatic lighting where you need it.



Available in: White (WH), Black (BK), Brushed Aluminum (BA)

- 7602WH, BK, BA** 2' Track
- 7604WH, BK, BA** 4' Track
- 7606WH, BK, BA** 6' Track
- 7608WH, BK, BA** 8' Track

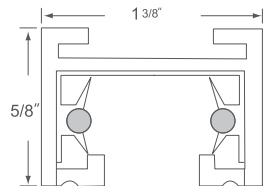


Connector

Single Circuit

- A. The best possible electrical conductivity due to Beryllium copper contacts
- B. True, positive electrical ground wire
- C. Spring-loaded positive latch secures track fixtures to track
- D. Embossed polarity arrows on side of adapter



To ensure correct installation, each section has a polarity line indicating the positive conductor side. Both lights and track connectors, when installed properly, have arrows which point to the track polarity line.

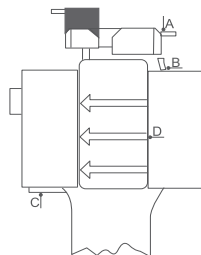

Track Lighting Accessories

7620WH, BK

Wireway Cover
Color: white (WH), black (BK)



7621WH, BK

Live End-Feed with Canopy
Color: white (WH), black (BK)




7622WH

Live-End Feed with 10' cord included
Color: white (WH)



7623WH, BK, BA

Mini-Straight Connector
Color: white (WH), black (BK), brushed aluminum (BA)



7624WH, BK, BA

L-Connector/
Straight Connector
Color: white (WH), black (BK), brushed aluminum (BA)



7625WH, BK

T-Connector
Color: white (WH), black (BK)



7629WH, BK, BA


Floating Feed
Color: white (WH), black (BK), brushed aluminum (BA)



Track Lighting Accessories

7626WH, BK

X-Connector
Color: white (WH), black (BK)



7647WH, BK, BA

H-track Connector
Color: white (WH), black (BK), brushed aluminum (BA)



7634WH, BK, BA

Conduit Connector
Color: white (WH), black (BK), brushed aluminum (BA)



7652WH, BK

Suspension Hook
Color: white (WH), black (BK)



7638WH, BK, BA

Live End Feed
Color: white (WH), black (BK), brushed aluminum (BA)




7653

T-Bar Clip



7640WH, BK, BA

Mono-Point Adapter
Color: white (WH), black (BK), brushed aluminum (BA)



7681WH, BK, BA

End Cap
Color: white (WH), black (BK), brushed aluminum (BA)



7642WH, BK

Flexible Connector
Color: white (WH), black (BK)



7694WH, BK

Slope Ceiling Adapter
Color: white (WH), black (BK)



7644WH, BK

Pendant Adapter
Color: white (WH), black (BK)
20LB Weight Limit



Track Extension Wand

Includes: Connector to Track, Extension Wand, Adapter for Track Head
Color: white (WH), black (BK)



7646WH, BK

T-Bar Connector
Color: white (WH), black (BK)



7684-12WH, BK

12" Extension Wand

7684-18WH, BK

18" Extension Wand

7684-24WH, BK

24" Extension Wand

7695WH

Suspension Cable
Includes 48" cable connection to back of track.
Color: white (WH)



Suspension Kit

Includes: canopy, stem length, connection to back of track

7654-12WH, BK

12" Suspension Stem Kit

7654-36WH, BK

36" Suspension Stem Kit

7654-18WH, BK

18" Suspension Stem Kit

7654-48WH, BK

48" Suspension Stem Kit

7654-24WH, BK

24" Suspension Stem Kit



Color: white (WH), black (BK)

Index

1004-E26-L.....	14	1071LED.....	24	4218.....	147
1005-E26-L.....	18	1072-PC.....	31	4309-1.....	148
1005LED.....	18	1072LED-PC.....	31	4310-1.....	148
1007-E26-L.....	15	1073-PC.....	30	4311-1.....	148
1007LED.....	15	1073LED-PC.....	30	4312-1.....	148
1008LED.....	14	1074.....	22	4313-1.....	112
1015W.....	35	1074LED.....	22	4314-1.....	112
1016W.....	36	1078-E26-L.....	11	4318-1.....	112
1021-PC.....	28	1078LED.....	11	4319.....	107
1022-PC.....	28	1079-E26-L.....	10	4320.....	120
1023-PC.....	29	1079LED.....	10	4322.....	120
1024-PC.....	29	1080W.....	37	4325D-1.....	109
1025-E26-L.....	19	1088.....	38	4326D-1.....	109
1025LED.....	19	1088LED.....	38	4327D-1.....	109
1032.....	41	1091.....	39	4328-1.....	111
1041-E26-L.....	16	1RP18-ES.....	46	4329-1.....	111
1041LED.....	16	1RP18-SG-ES.....	46	4330-1.....	111
1042-E26-L.....	20	1RP22-ES.....	47	4333.....	115
1042LED.....	20	1RP28-E26-L.....	48	4334.....	115
1043LED.....	13	1RP31-LE.....	48	4335.....	115
1044LED.....	17	1RP32-LED.....	48	4336.....	120
1045LED.....	21	1RP69LED.....	48	4337.....	120
1046.....	23	1RP8-ES.....	46	4338.....	120
1046LED.....	23	1RP82-ES.....	47	4340.....	113
1047.....	25	1RP83-LED.....	48	4345.....	112
1047LED.....	25	1RP84-LED.....	48	4347.....	114
1048.....	27	1RP88LED.....	48	4348.....	115
1048LED.....	27	1RP89LED.....	48	4350.....	109
1049-E26-L.....	12	2004CG.....	49	4401LED.....	177
1049LED.....	12	2004FG.....	49	4404.....	122
1051.....	45	2015CG.....	49	4405.....	179
1052.....	42	2015FG.....	49	4406.....	178
1053.....	43	2021G.....	49	4407.....	180
1054.....	43	2061G.....	49	4408.....	181
1057-L.....	40	3001G.....	49	4420.....	174
1062-1.....	44	4105.....	146	4421.....	174
1063-1.....	44	4106.....	146	4422.....	174
1064-1.....	44	4115.....	144	4423.....	171
1065.....	26	4115DM.....	144	4424.....	171
1065LED.....	26	4116.....	145	4425.....	172
1067.....	32	4116DM.....	145	4426.....	172
1068.....	33	4117-1.....	149	4427.....	173
1069.....	34	4120.....	149	4428.....	173
1070W.....	37	4204.....	147	4429.....	175
1071.....	24	4217.....	147	4430.....	139

Index

4432-1.....	175	7594.....	191	8122H.....	70
4433.....	177	7602.....	194	8122HIC.....	70
4503.....	121	7604.....	194	8124H.....	70
4505.....	121	7606.....	194	8125H.....	74
4506.....	107, 130	7608.....	194	8125HIC.....	74
4600.....	137	7620.....	194	8126H.....	74
4601.....	135	7621.....	194	8162H.....	72
4602.....	135	7622.....	194	8163H.....	73
4603.....	134	7623.....	194	8164H.....	76
4604.....	136	7624.....	194	8164HIC.....	76
4605.....	139	7625.....	194	8166H.....	76
4606.....	138	7626.....	195	8166HIC.....	76
4715.....	114, 176	7629.....	194	8168H.....	76
4782EM.....	166	7634.....	195	8168HIC.....	76
4783EM.....	166	7638.....	195	8199HICA-FR.....	68
4785EM.....	167	7640.....	195	8201HA.....	84
4785F.....	167	7642.....	195	8201HRA.....	84
4904.....	127	7644.....	195	8202HA.....	84
4905.....	107, 131	7646.....	195	8215HA.....	80
4906.....	128	7647.....	195	8215HRA.....	80
4907.....	129	7652.....	195	8317H.....	78
4908.....	127	7653.....	195	8317HR.....	78
4909.....	126	7654.....	195	8320H.....	62
49353.....	192	7681.....	195	8321H.....	62
49354.....	192	7684.....	195	8502.....	90
49355.....	193	7694.....	195	8504.....	90
49356.....	193	7953.....	191	8505.....	90
4-JBR.....	91	7953-4.....	191	8511.....	90
7526.....	189	8041.....	76	8519.....	90
7528.....	189	8061.....	76	8523.....	69, 83, 89
7551.....	189	8081.....	76	8536.....	97, 108
7553.....	188	8091A.....	103	8538.....	89, 101, 118
7554.....	188	8096A.....	103	8539.....	97, 108
7574.....	188	8096B.....	64, 70, 72, 73, 74, 103	8542-2.....	92
7575.....	188	8097A.....	103	8544.....	90
7576.....	188	8098A.....	103	8545.....	95
7577.....	188	8102HAQ.....	88	8548.....	98, 110
7578.....	189	8102HRA.....	88	8554.....	102, 119
7579.....	189	8104HICA.....	88	8556.....	90, 99, 116
7580.....	189	8116HIC.....	87	8556-S.....	100, 117
7584.....	190	8117HA.....	82	8557.....	100, 117
7586.....	190	8117HRA.....	82	8562.....	69, 83, 89
7587.....	190	8120H.....	64	8563.....	69, 83, 89
7588.....	190	8120HIC.....	64	8564.....	89
7589.....	190	8121H.....	64		

Index

8567.....	89	8861.....	63	REL20.....	161
8568.....	69, 83, 89	8862.....	63	REL21.....	161
8569.....	90, 101, 118	8918.....	183	REL22.....	162
8570.....	87	8919-1.....	184	REL23-N-SD.....	162
8571.....	87	8919-18K.....	184	REL23-SD.....	162
8572.....	87	8920.....	184	REL-200.....	161, 162
8573.....	87	8924.....	183	REL35.....	160
8586.....	65	8966.....	142	REL5LED.....	164
8587.....	65	8966-2734.....	143	REL6LED.....	163
8590.....	65	8967.....	142	REL7LED.....	164
8642.....	93	8967-2734.....	143	RH17.....	165
8651.....	71	8968.....	142	RH18.....	165
8652.....	71	8968-2734.....	143	RH21.....	165
8653.....	71	8969.....	142	RH22.....	165
8655.....	71	8969-2734.....	143	RXEL25.....	157
8656.....	72	8970.....	142	RXEL35.....	157
8671.....	75	8970-2734.....	143	RXEL36.....	157
8673.....	75	8971.....	142	RXEL37.....	158
8676.....	73	8971-2734.....	143	RXEL38.....	158
8701.....	86	8972.....	142	RXEL39.....	159
8702.....	86	8972-2734.....	143	RXEL40.....	159
8705.....	86	DC.....	52	RXL15-1.....	156
8708.....	91	E12.....	52	RXL16-1.....	156
8711.....	91	E18.....	52	RXL17.....	154
8722.....	85	E24.....	52	RXL18.....	154
8739.....	97, 108	E36.....	52	RXL28.....	153
8742-2.....	92	E48.....	52	RXL33.....	155
8748.....	98, 110	E60.....	52	RXL34.....	155
8756.....	85, 99, 116	E72.....	52	RXL5.....	153
8761.....	85	ER36.....	52	SA45.....	53
8763.....	67, 81, 85	ER48.....	52	T-09.....	52
8765.....	85	ER60.....	52	WC-3.....	51
8768.....	85	FF109-300.....	103	WC-4.....	51
8769.....	67, 81, 86	FF-109-350.....	103	WC-8.....	51
8770.....	67, 81, 86	FF109X.....	103	WC-13.....	51
8771.....	67, 81, 86	LC-102.....	50	WC-16.....	51
8773.....	67, 81, 86	LC-79.....	50		
8775.....	94	LK10.....	49		
8776.....	96	LK12.....	49		
8821-1.....	79	LK30.....	49		
8822-1.....	79	LK412.....	49		
8823.....	79	PF-3.....	93, 103		
8824.....	79	PF-4.....	92, 94, 96, 103		
8825.....	79	PF-6.....	92, 95, 103		
8842.....	93	RC-10.....	51		

RP LIGHTING • FANS

4931 Paseo Del Norte NE
Albuquerque, NM 87113

www.rplighting.com

Phone: (505) 821-6964

Toll Free: (800) 937-6925

Fax: (505) 821-0367

Toll Free: (800) 207-9509

Email: rplighting@rplighting.com

© 2021 RP Lighting • Fans



RP

LIGHTING • FANS

