

INSTALLATION INSTRUCTION FOR FIXTURE #3323-84

WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER.
AVERTISSEMENT! COUPER LE COURANT AU NIVEAU DES FUSIBLES OU DU DISJONCTEUR.

MOUNTING THE FIXTURE (FIG. 1)

1. Shut off the power supply at the fuse box or circuit breaker. If necessary, remove the old fixture from wall. Including the mounting hardware.
2. Carefully remove the new fixture from the carton and check that all parts are included as shown in the illustration.
3. Attach the mounting plate (A) to the outlet box using the mounting screws (B). The side of the mounting plate marked "GND" must face out.

CONNECTING THE WIRES (FIG. 2)

4. At this point, connect the electrical wires as shown in Fig. 2, making sure that all wire nuts are secured. If your outlet box has a ground wire (green or bare copper), connect the fixture's ground wire to it. Otherwise, connect the fixture's ground wire directly to the mounting plate using the ground screw provided.
5. Tuck the wire connections neatly into the wall outlet box.

ASSEMBLE THE FIXTURE (FIG. 1)

6. Attach the fixture backplate (C) over the mounting plate (A) and secure with small screws (G) until snug.
7. Place the glass shades (E) over the sockets (F), then secure with socket rings (SKT-RING-26) tightly.
8. Install the bulbs in accordance with fixture's specifications. **(DO NOT EXCEED THE MAXIMUM WATTAGE RATING!) (NE PAS DEPASSER LA PUISSANCE NOMINALE MAXIMALE!).**

Your installation is now complete. Return power to the junction box and test the fixture.

Fig.1

Set A-020-116

-Mounting Plate

-Ground screw

-Mounting screws (2)

Socket Ring#SKT-RING-26

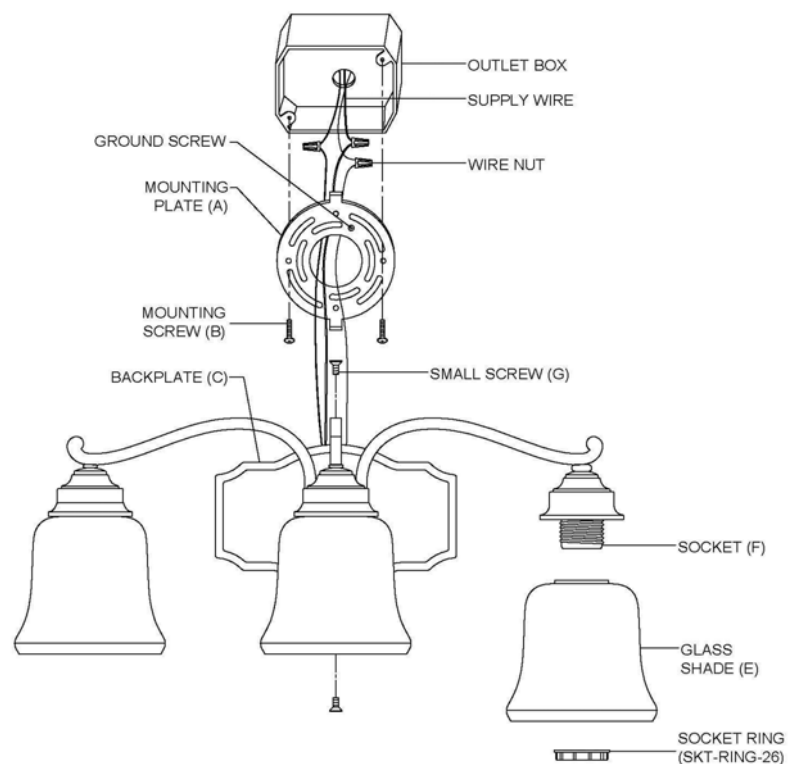


Fig.2

FIXTURE WIRES BLACK OR SMOOTH	HOUSE WIRES BLACK (HOT)	FIXTURE WIRES WHITE OR RIBBED	HOUSE WIRES WHITE (NEUTRAL)	FIXTURE WIRES GREEN OR BARE COPPER (GROUND)	HOUSE WIRES GREEN OR BARE COPPER (GROUND)
-------------------------------------	-------------------------------	-------------------------------------	-----------------------------------	---	--

